


R&M SPACEMASTER EX

DOUBLE GIRDER, 6 PART DOUBLE
SX6 EX 062...D0

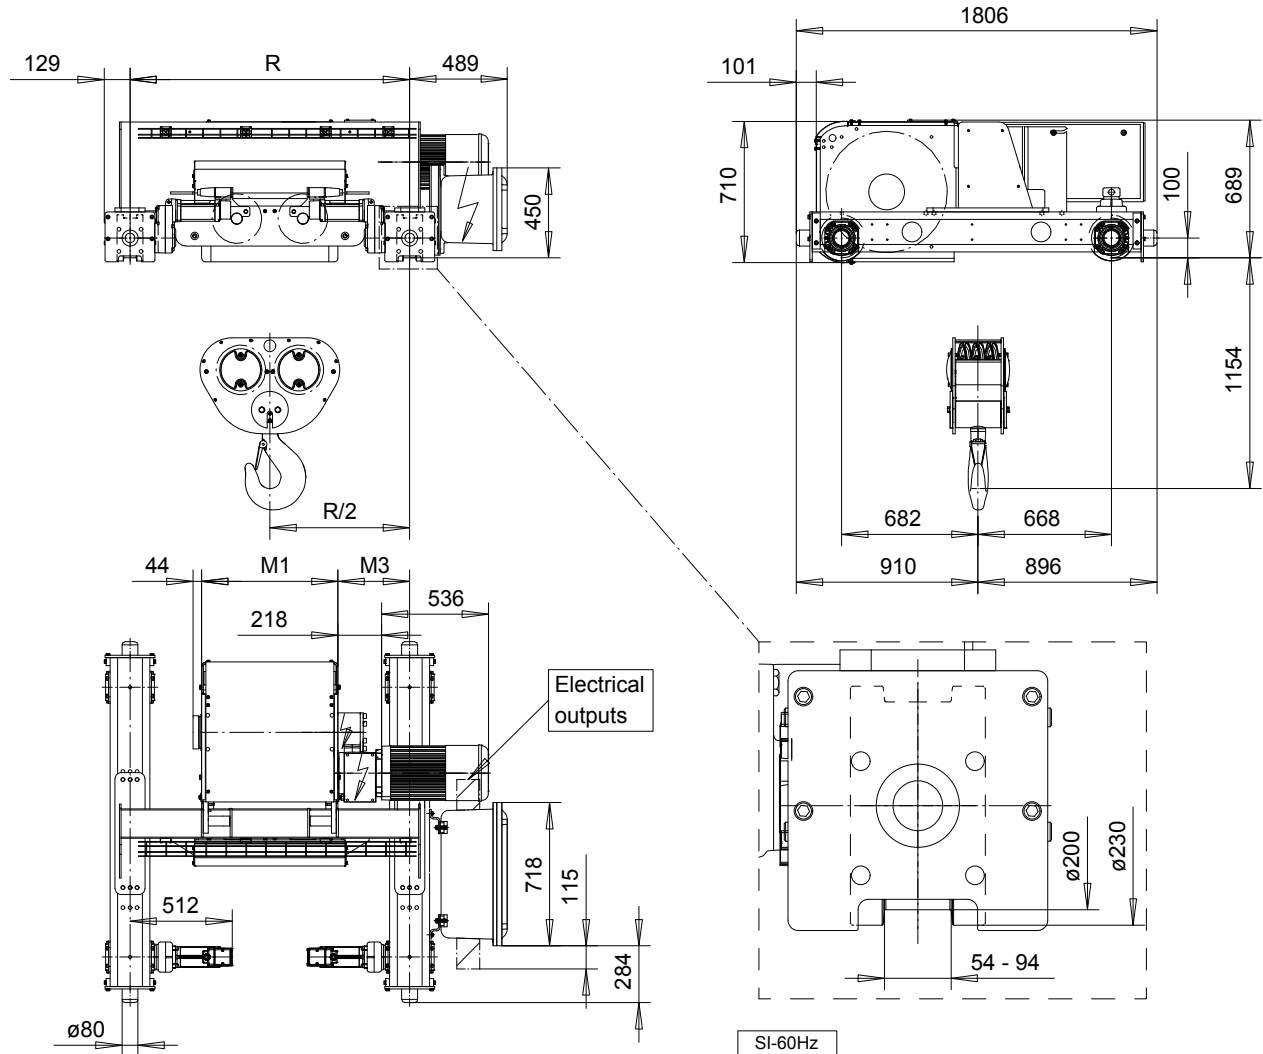

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		3/0.5	3.8/0.6
20000	3m/M6		

HOL (m)	Length code	M1 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
5.5	E	682	359	1400	1620
7	F	832	434	1700	1710
9.5	G	1022	339	1700-2000	1770
13	H	1272	364	2000-2400	1890
17	J	1622	389	2400-2700	2090
21	K	1922	389	2700-3100	2280
25.5	L	2272	414	3100-3400	2530
28.5	M	2522	439	3400-3800	2690
32.5	N	2822	489	3800-4200	2900

min R is minimum rail gauge when service platform is supplied. Weight calculated at minR. Weight increases with longer gauges. Standard rail gauges are 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800, and 4200

R&M reserves the right to alter or amend the above information without notice