


RSN16-1669-450255C0000-N

- | Joint plate | JPH (mm) | JPL (mm) | Min. Wheelbase (mm) |
|---------------|----------|----------|---------------------|
| EBN16-350x255 | 255 | 350 | 1600; DG |
| EBN16-350x305 | 305 | 350 | 1600; DG |
| EBN16-450x255 | 255 | 450 | 2000; DG |
| EBN16-450x305 | 305 | 450 | 2000; DG |

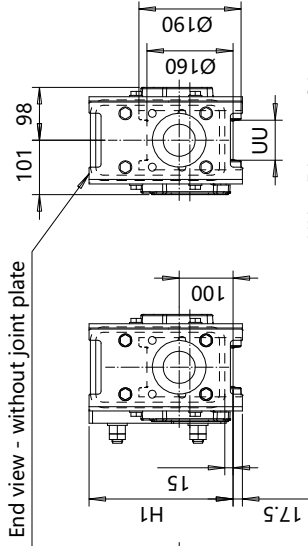

Buffer type	L1 (mm)	Ø (mm)
B	68	80
C	85	100
D	105	125
K	80	80
G	100	100
E	150	100
M	125	125
F	190	125
H	160+100	160
P	240+100	160
B, C, D rubber		
K, G, E, M, F, H, P polyurethane		

Wheelbase code	SS (mm)	H1 (mm)	Max. dyn whl load, (kN)			Perm dyn whl load, (kN)			Approx. Wgt / Trk (kg)	
			SG	DG		ASCE 40	ASCE 60	ASCE 85	SG	DG
16	1600	268	80	80		50	67.9	75	186	213
20	2000	268	80	80		50	67.9	75	209	236
25	2500	268	80	80		50	67.9	75	237	264
32; DG	3150	268	-	80		50	67.9	75	-	300
32; SG	3150	318	80	-		50	67.9	75	301	-
40	4000	318	63	69		50	67.9	75	357	384
45	4500	318	44	48		50	67.9	75	389	416