


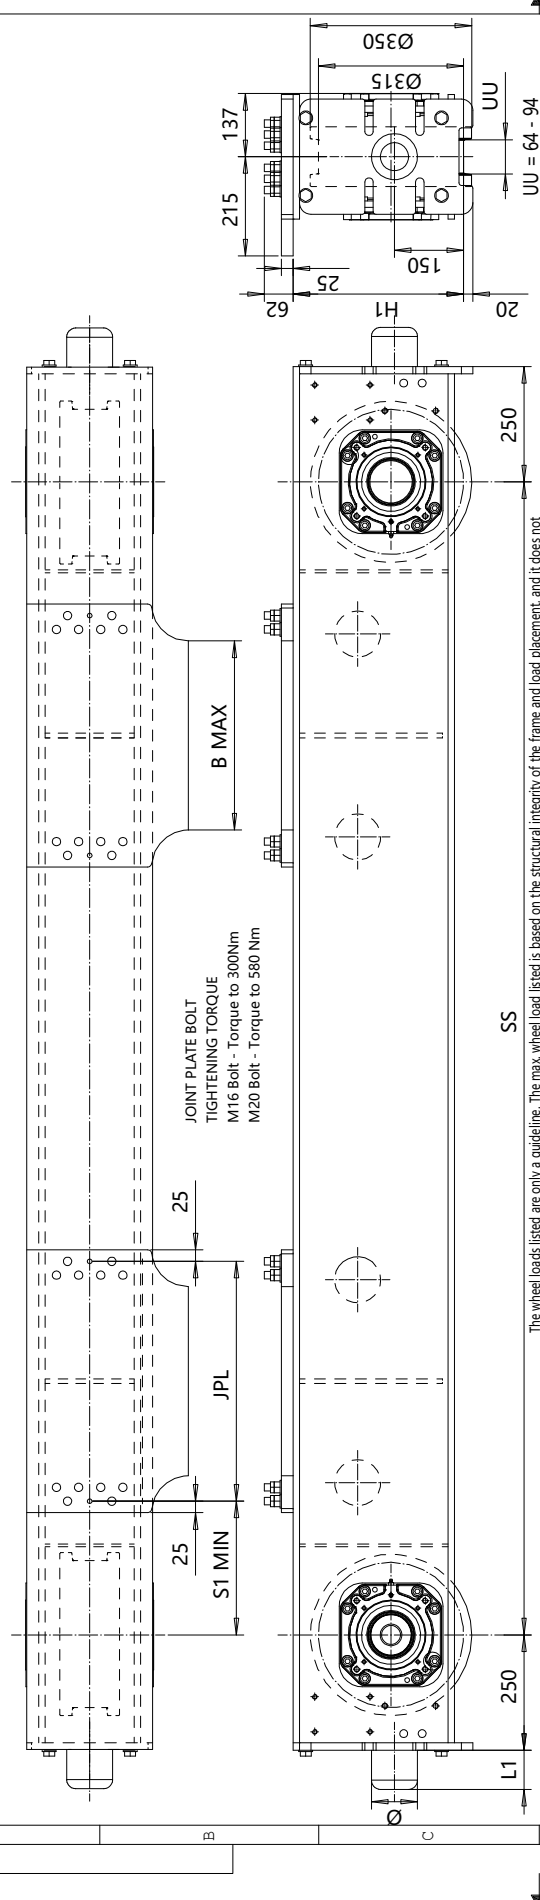

Product Code example

RTN32-2574-K40880C0000-N

SS →
S1 MIN →
JPL →
B MAX →
250 →
25 →
150 →
215 →
137 →
62 →
20 →
64 - 94 →
Ø350 →

Buffer type	L1, (mm)	Ø, (mm)
B	68	80
C	85	100
D	105	125
E	150	100
F	190	125
H	160	160
I	200	200
M	125	125
P	240	160
S	300	200
T	350	250
Y	475	250

Joint plate	JPL (mm)	B max (mm)
K4	520	410
K5	630	520
K7	850	740
K9	1100	990

Minimum wheelbase with K9 joint plate is 3150 mm.

Wheelbase code	SS (mm)	Max dyn whl load, (kN)	Permissible dyn whl load, (kN)	Approx Wt./Trk, kg	H1 (mm)	S1 MIN (mm)
25	2500	253	219	638	731	280
32	3150	200	219	723	816	280
40	4000	208	219	815	908	320
45	4500	185	219	871	964	320
50	5000	200	219	993	1086	320
55	5500	182	219	1054	1147	320

Res	Description	Specification	ETTPA Chd	Appl	Ref Drawing
ETTPA	Design	2008-08-11	END TRUCK		
SLEDDOCV	Part		OUTLINE DRAWING		
RTN32-K					
RTN32 END TRUCK TOP JOINT					

1.7
Folder
ENB32
Date
3/2012