


FOOT MOUNT, 2 PART DOUBLE

Hoist type:

SX5 022...F0

SI-50Hz

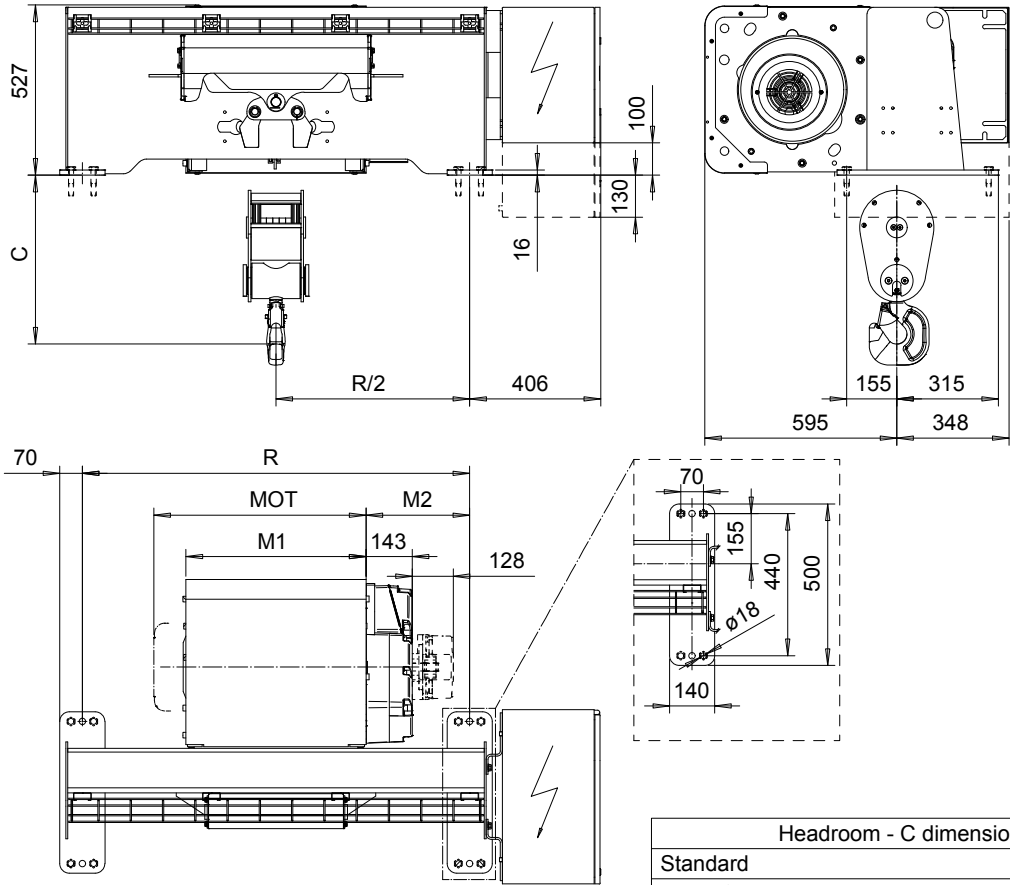

Headroom - C dimension	
Standard	523 mm
with HS22 Hook operated limit switch	573 mm

Motor	P5	P6	P7	A5	S5	S7
MOT (mm)	578	578	618	498	606	757
Weight (kg)	58	85	105	45	53	81

Load (kg)	Class
	Fem/ISO
4000	3m/M6
5000	2m/M5

HOL (m)	Length code	M1 (mm)	M2 (mm)	R (mm)	Approx Weight (kg)
8.5	D	558	321	1200	505
13	E	678	261	1200	530
18	F	828	186	1200	555
25	G	1018	91	1200	590
33.5	H	1268	216	1700	670
46	J	1618	191	2000	755

Brake is mounted on gearcase for drum length H and J.
Approx weight calculated with P5 motor.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QC-F-22
2002-08-30 Date	HOIST; FIXED			1:10
SLEODOCV Owner Dept	2x2 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D007244-A		Issue 2