
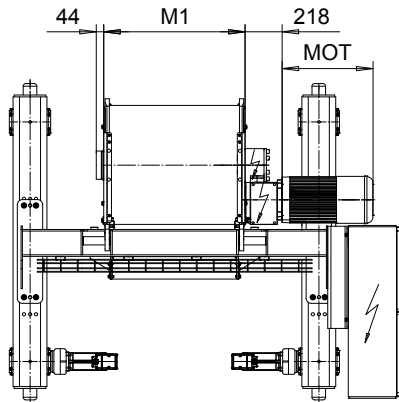
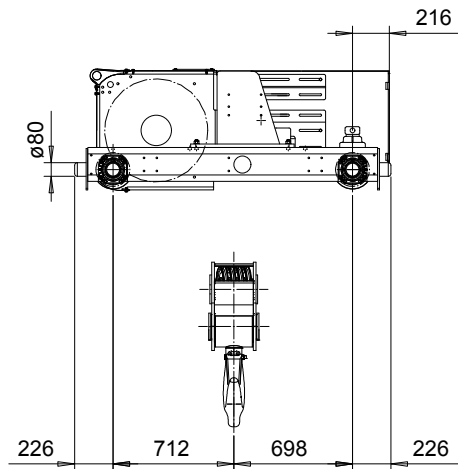


DOUBLE GIRDER, MEDIUM, 8 PART DOUBLE

Hoist type:
SX6 082...D0

SI-60Hz

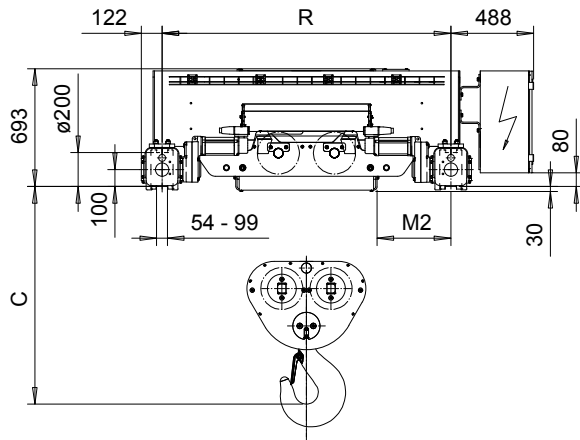

HOL (m)	HOL* (m)	Length code	M1 (mm)	M2 (mm)	Min R (mm)	Max R (mm)	Approx Weight (kg)
5	3.5	F	832	434	1700	2400	1850
7	5.5	G	1022	338	1700	2700	1920
9.5	8	H	1272	364	2000	3100	2050
12.5	11	J	1622	389	2400	3400	2230
15.5	14	K	1922	389	2700	3400	2400
19	17.5	L	2272	414	3100	3400	2620
21.5	20	M	2522	439	3400	3800	2790
24.5	23	N	2822	489	3800	4200	3010

HOL* with optional drum brake Weight of drum brake is 80 kg.

Motor	P6	P7	P8	A7	S7	S8	SA
MOT (mm)	536	576	711	536	715	763	803
Weight (kg)	85	105	106	71	81	97	120

Load (kg)	Class Fem/ISO
32000	2m/M5
40000	1Am/M4

Headroom - C dimension	
Standard	1280 mm
with HS22 Hook operated limit switch	1330 mm

Standard rail gauges are 1700, 2000, 2400, 2700, 3100, 3400, 3800, and 4200 mm.

M2 is listed at Min R.

Hoist weight calculated at Min R, with P6 motor, without drum brake.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Ctd	Appd	Ref Drawing	QD-M-28
2002-09-02 Date	TROLLEY; DOUBLE GIRDER			1:19
SLEODOCV Owner Dept	MEDIUM, 2x8 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D006654-A		Issue 4