
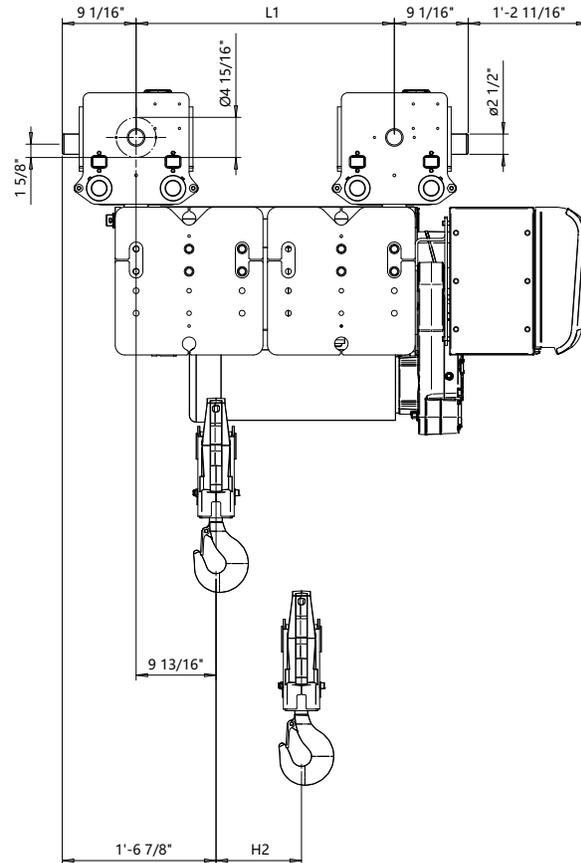


# Normal Headroom for Straight Track, 2 PART SINGLE

## Hoist type:

US-60Hz

SXR10 021..N

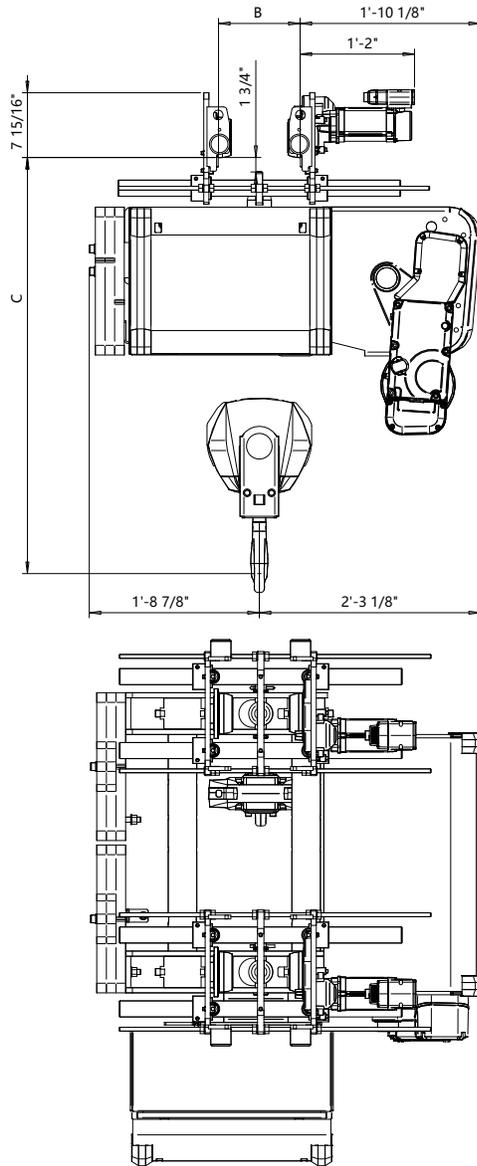

Flange Width B-dimension [inch]	Headroom C-Dimension				
	Case 1 [inch]	Case 2 [inch]	Case 3 [inch]	Case 4 [inch]	Case 5 [inch]
4 3/4" - 17 3/4"	43 1/8"	51"	52 3/4"	47 7/8"	50 3/8"
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL (ft-in)	Length code	H2 (inch)	L1 (inch)	Estimated Weight (lb)
59'-0"	C	10 1/2"	2'-7 5/8"	2310
78'-8"	D	14"	3'-2 1/2"	2410
98'-5"	E	17 1/2"	3'-9 13/16"	2520

Load (ton)	Class ASME
4	H4+
5	H4

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-N-02
Date	NORMAL HEADROOM HOIST			1:10
SLEQMECE Owner Dept	FOR STRAIGHT TRACK			Folder
2 PART SINGLE				Issue
R10021_N				1

