


Double Girder - Medium, 2 PART DOUBLE
Hoist type:
SXR10 022..M

US-60Hz

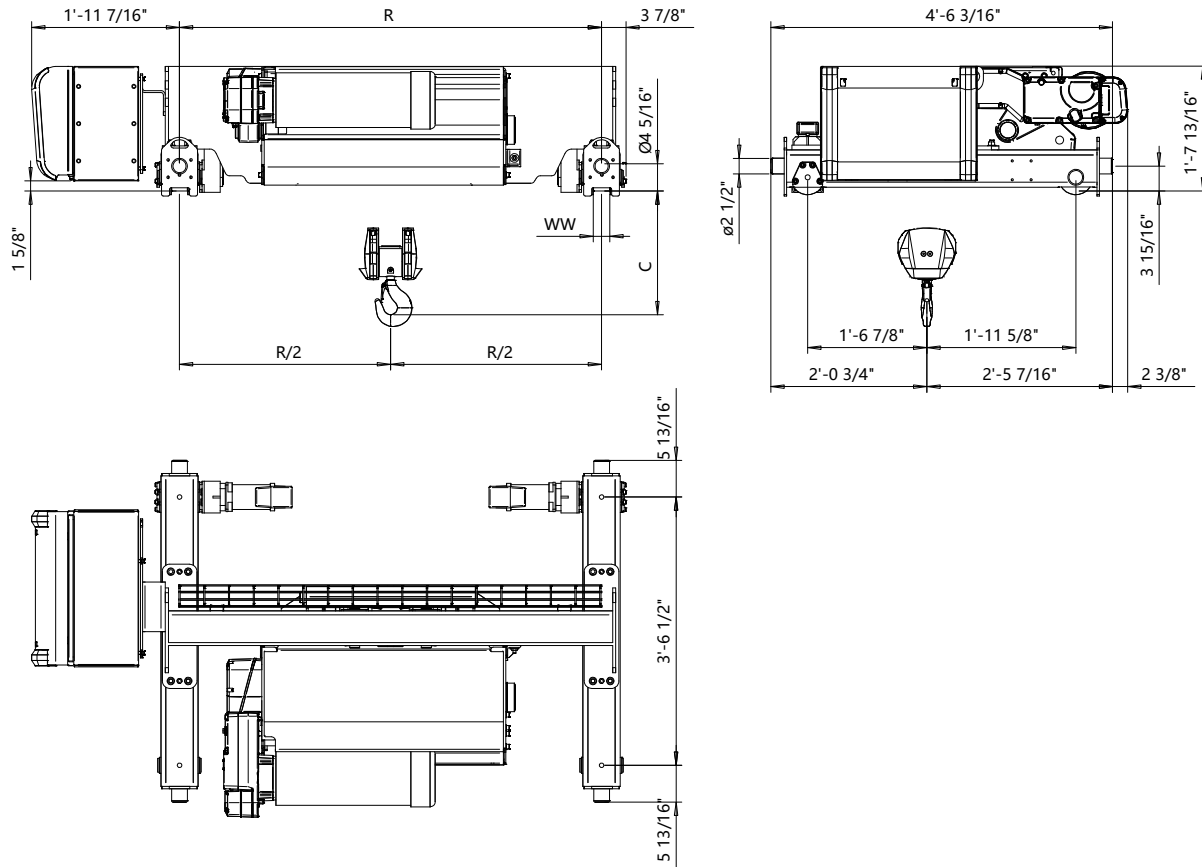

Headroom C-Dimension			Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 1: Steel rope without HS22 limit switch
19 5/8"	20"	22 1/4"	Case 2: Steel rope with HS22 limit switch
			Case 3: Steel rope with HS22 L.S. & Rope angle sensor

HOL (ft-in)	Length code	WW min	WW max	R min	R max	Estimated Weight *	
						R min (lb)	R max (lb)
42'-7"	D	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	1134	1420
59'-0"	E	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	1193	1482
72'-2"	F	2 1/16"	3 1/4"	6'-6 3/4"	10'-2 1/16"	1305	1541
95'-1"	G	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	1442	1623
118'-1"	H	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	1635	1715
141'-1"	J	2 1/16"	3 1/4"	8'-10 5/16"	10'-2 1/16"	1680	1808
173'-10"	K	2 1/16"	3 1/4"	10'-2 1/16"	10'-2 1/16"	1940	1940

* Estimated weight with P5 hoist motor
Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16".
Default trolley gauge is R min.

Load (ton)	Class
4	H4+
5	H4

* Estimated weight with P5 hoist motor Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16". Default trolley gauge is R min.					Design	Chd	Appd	Ref Drawing	R10-M-22	
					Date	DOUBLE GIRDER HOIST				
					SLEIGHMECE Owner Dept	2 PART DOUBLE				1:10
Rev Explanation Date Revised by Checked by									Folder	
This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.									Issue 1	
					R10022 M					

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

