


Double Girder - Medium, 4 PART SINGLE
Hoist type:
SXR10 041..M

SI

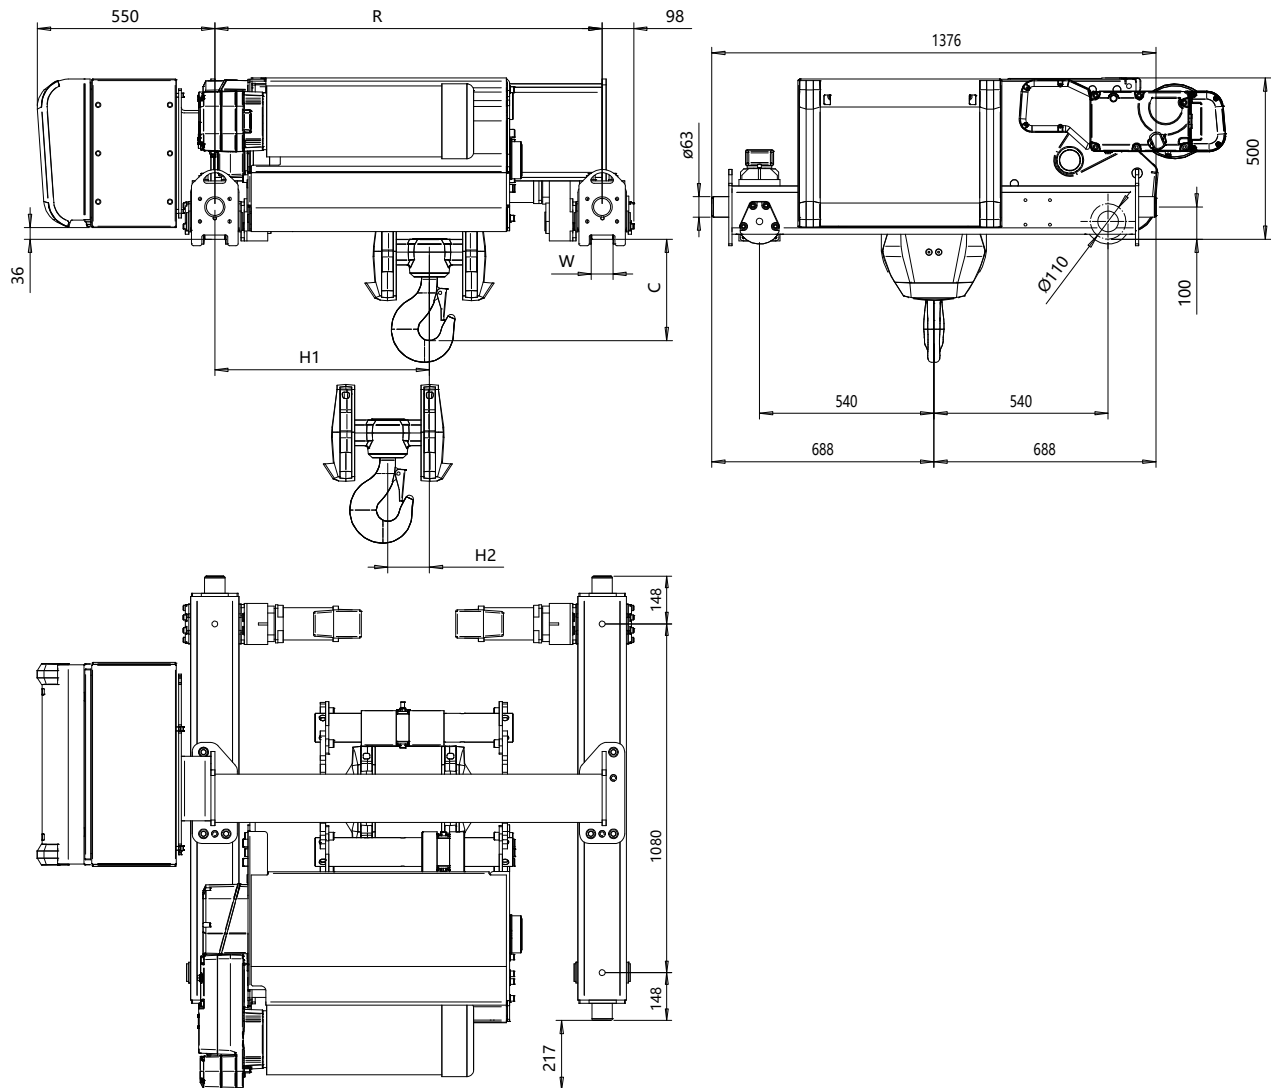

Headroom C-Dimension					Notes
Case 1	Case 2	Case 3	Case 4	Case 5	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
320	500	555	430	485	Case 3: Steel rope with HS22 L.S. & Rope angle sensor
					Case 4: Synthetic rope and HS22 limit switch
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor
					HS22 limit switch mandatory with synthetic rope

								Estimated weight *	
HOL	Length	H1	H2	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
9	C	665	130	52	82	1200	2000	685	719
12	D	840	174	52	82	1400	2000	718	744
15	E	1025	219	52	82	1700	2000	758	771
18	F	1210	263	52	82	2000	2000	797	797

Load	Class	Class
(kg)	Fem/ISO	ASME
5000	3m/M6	H4+
6300	3m/M6	H4+
8000	3m/M6	H4+
10000	2m/M5	H4

* Estimated weight with P5 hoist motor
Standard rail gauges are 1200 mm, 1400 mm, 1700 mm, 2000 mm.
Default trolley gauge is R min. Dim H1 listed is based on R min.

Rev Explanation Date Revised by Checked by
This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-04
Date	DOUBLE GIRDER HOIST			
SLEOMECE Owner Dept	4 PART SINGLE			
R10041_M				1:10 Folder
				Issue 1

