
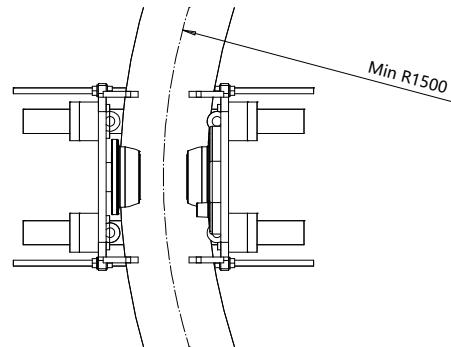
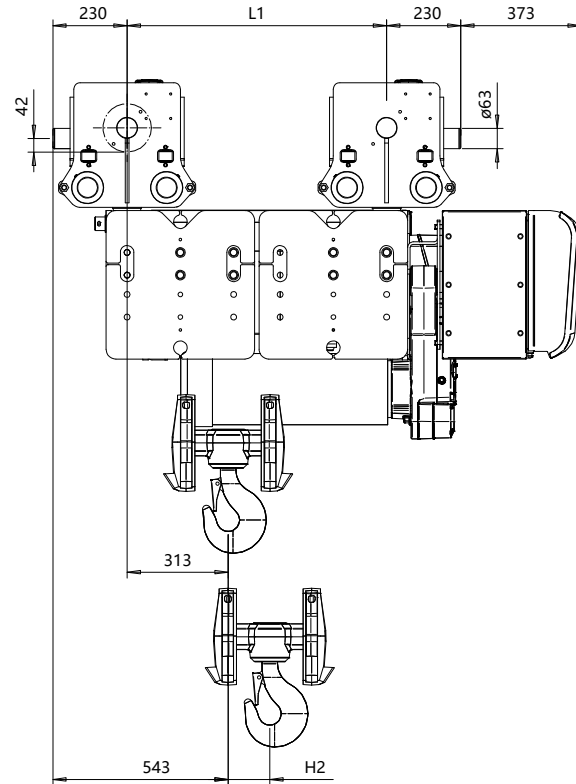


Normal Headroom - Swivel Trolley for Curved Track, 4 PART SINGLE Hoist type:

SXR10 041..U

SI

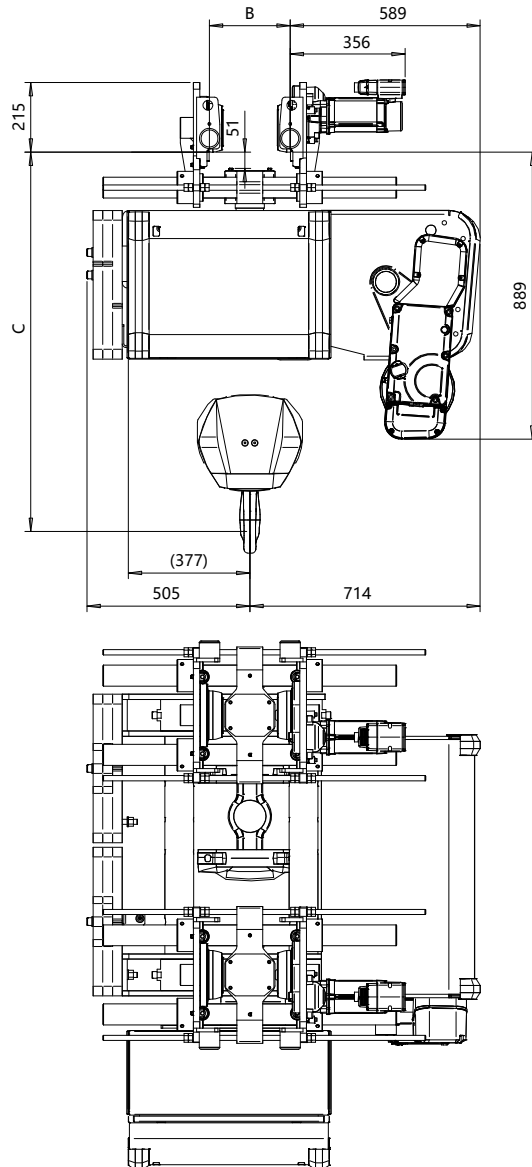

Flange Width	Headroom C-Dimension				
B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
120 - 450	990	1175	1125	1105	1160
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated weight
(m)	code	(mm)	(mm)	(kg)
9	C	129	804	566
12	D	173	977	605
15	E	218	1164	636

Load	Class	Class
(kg)	Fem/ISO	ASME
8000	3m/M6	H4+
10000	2m/M5	H4

Rev Explanation Date Revised by Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-U-04
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			
SLEIGHMECE Owner Dept	FOR CURVED TRACK			
4 PART SINGLE				Folder
R10041_U				Issue
				1

R10-U-04_1

2025-07-11

R10-U-04