


Double Girder - Medium, 6 PART SINGLE

Hoist type:

SXR10 061..M

SI

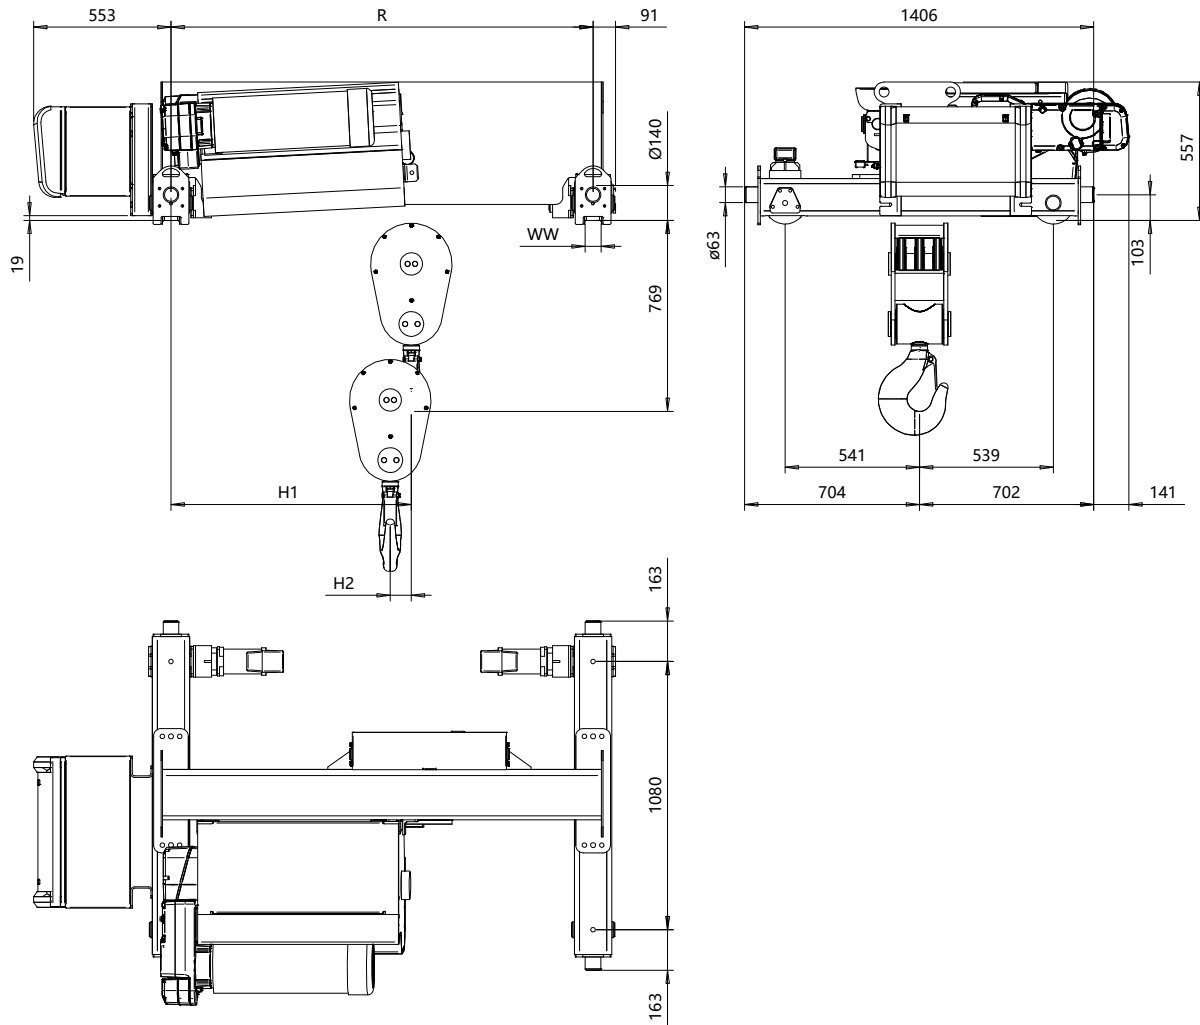

Headroom C-Dimension					Notes
Case 1	Case 2	Case 3	Case 4	Case 5	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
769	769	769	769	769	Case 3: Steel rope with HS22 L.S. & Rope angle sensor
					Case 4: Synthetic rope and HS22 limit switch
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor
					HS22 limit switch mandatory with synthetic rope

								Estimated weight *	
HOL	Length	H1	H2	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6	C	968	85	54	84	1700	2700	681	789
8	D	1118	114	54	84	2000	2700	752	827
10	E	1315	143	54	84	2400	2700	821	853
12	F	1468	174	54	84	2700	2700	877	877

Load	Class	Class
(kg)	Fem/ISO	ASME
12000	3m/M6	H4+
15000	2m/M5	H4

* Estimated weight with P5 hoist motor

Standard rail gauges are 1700 mm, 2000 mm, 2400 mm, 2700 mm.

Default trolley gauge is R min. Dim H1 listed is based on R min.

Rev	Explanation	Date	Revised by	Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-06
Date	DOUBLE GIRDER HOIST			
SLEOMECE Owner Dept	6 PART SINGLE			
R10061_M				1:10 Folder
				Issue 1