


Double Girder - Medium, 6 PART SINGLE

Hoist type:

SXR10 061..M

US-60Hz

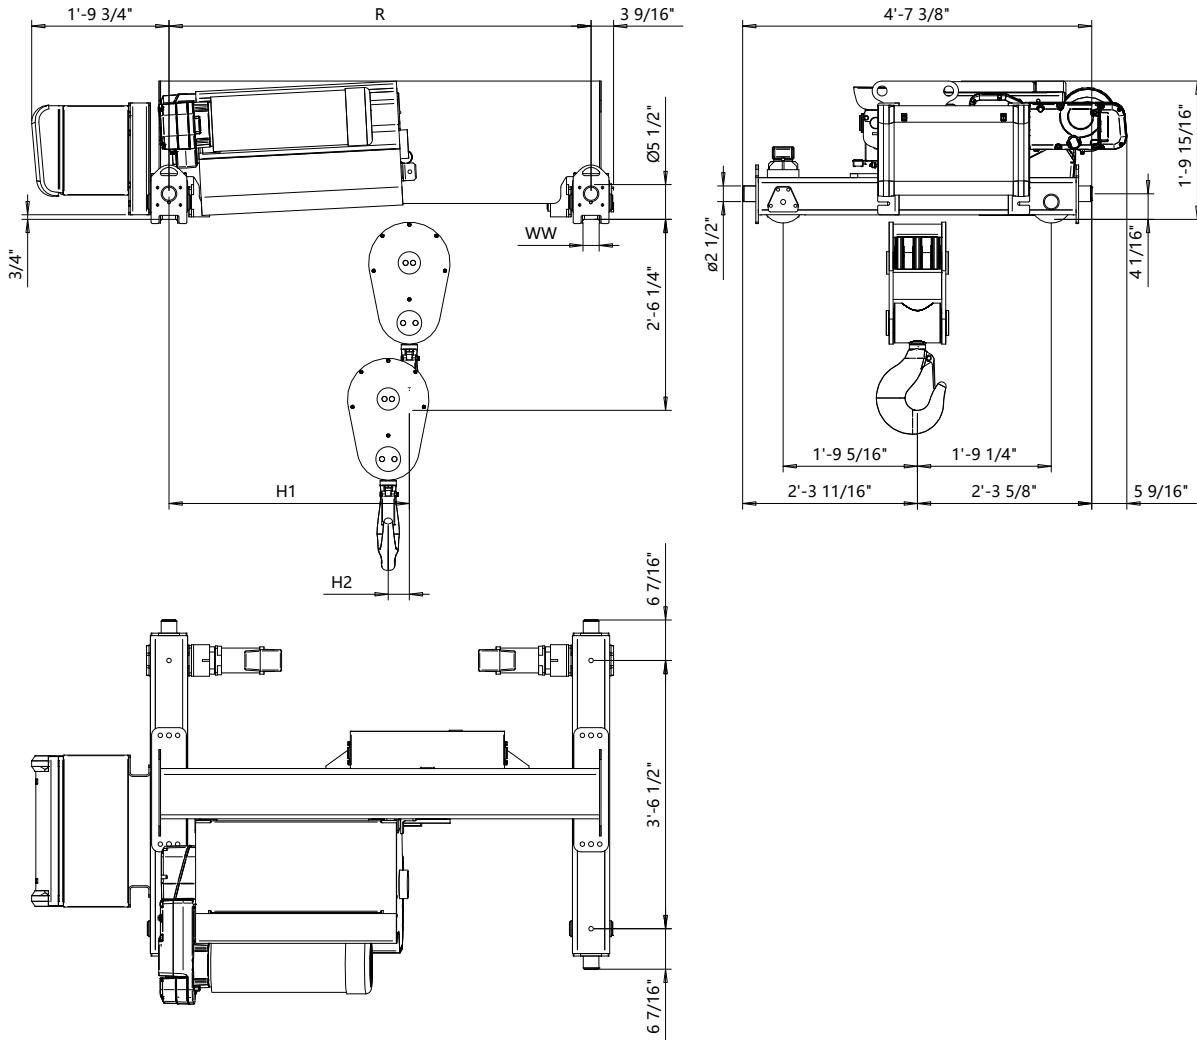

Headroom C-Dimension					Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 4 (inch)	Case 5 (inch)	Case 1: Steel rope without HS22 limit switch Case 2: Steel rope with HS22 limit switch Case 3: Steel rope with HS22 L.S. & Rope angle sensor Case 4: Synthetic rope and HS22 limit switch Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor HS22 limit switch mandatory with synthetic rope
2'-6 1/4"	2'-6 1/4"	2'-6 1/4"	2'-6 1/4"	2'-6 1/4"	

HOL (ft-in) code	Length	H1	H2	Estimated Weight *			
				WW min	WW max	R min	R max
19'-8"	C	3'-2 1/8"	3 3/8"	2 1/8"	3 5/16"	5'-6 15/16"	8'-10 5/16"
26'-2"	D	3'-8"	4 1/2"	2 1/8"	3 5/16"	6'-6 3/4"	8'-10 5/16"
32'-9"	E	4'-3 3/4"	5 5/8"	2 1/8"	3 5/16"	7'-10 1/2"	8'-10 5/16"
39'-4"	F	4'-9 11/16"	6 7/8"	2 1/8"	3 5/16"	8'-10 5/16"	8'-10 5/16"
						2050	2300
						2200	2360
						2380	2450
						2520	2520

Load (ton)	Class
ASME	
12	H4+
15	H4

* Estimated weight with P5 hoist motor

Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16".

Dim H1 listed is based on R min.

Rev. Explanation Date Revised by Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.

The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-06
Double Girder Hoist				1:10
6 Part Single				Folder
R10061_M				Issue 2