


Double Girder - Medium, 6 PART DOUBLE
Hoist type:
SXR10 062..M

SI

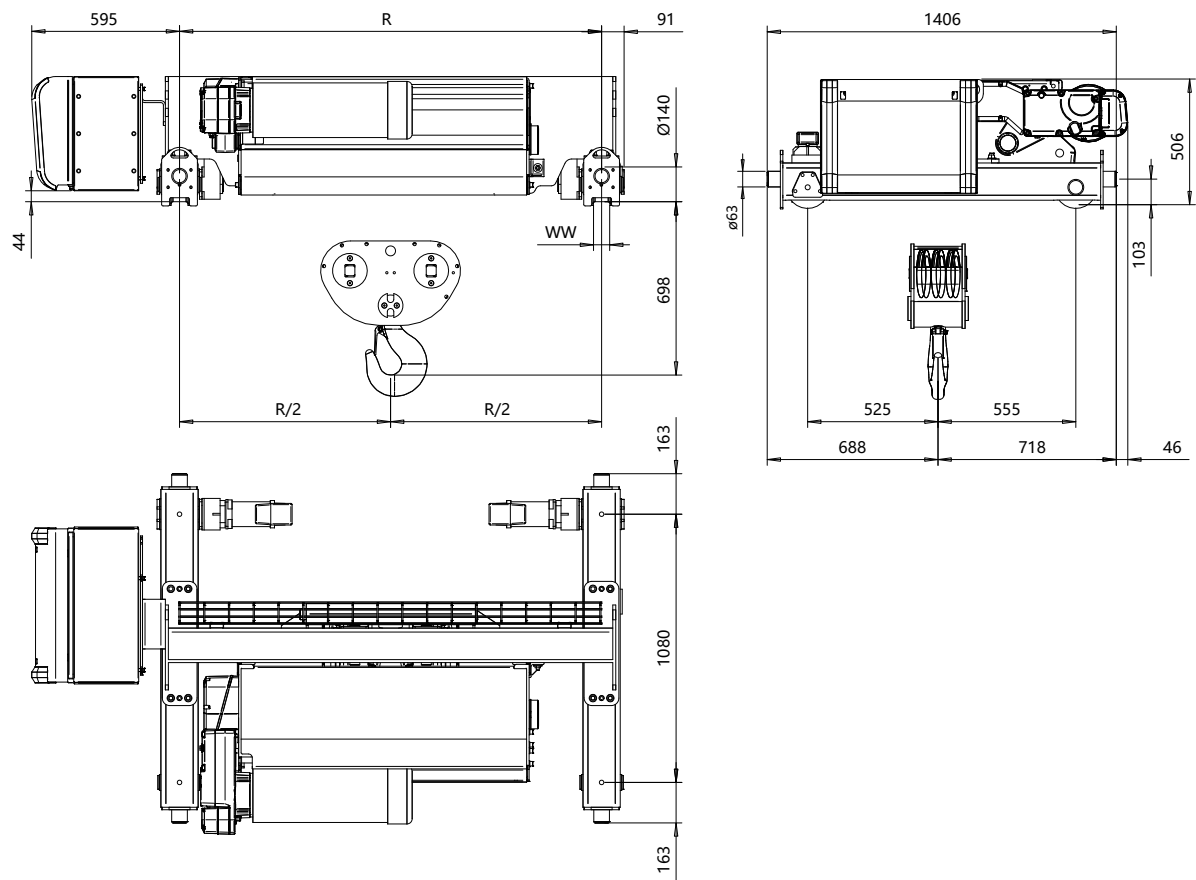

Headroom C-Dimension			Notes
Case 1	Case 2	Case 3	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
698	698	698	Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated weight *	
HOL	Length	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6	E	54	84	1700	3100	916	1052
7.3	F	54	84	2000	3100	971	1084
9.6	G	54	84	2400	3100	1048	1129
12	H	54	84	2400	3100	1102	1184
14.3	J	54	84	2700	3100	1179	1238
17.6	K	54	84	3100	3100	1311	1311

Load	Class	Class
(kg)	Fem/ISO	ASME
12000	3m/M6	H4+
15000	2m/M5	H4

* Estimated weight with P5 hoist motor
Standard rail gauges are 1700 mm, 2000 mm, 2400 mm, 2700 mm, 3100 mm.
Default trolley gauge is R min.

Rev	Explanation	Date	Revised by	Checked by
-----	-------------	------	------------	------------

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-26
Date	DOUBLE GIRDER HOIST			 1:10
SLEQMECE Owner Dept	6 PART DOUBLE			Folder
				
	R10062_M			Issue 2