


Double Girder - Medium, 6 PART DOUBLE
Hoist type:
SXR10 062..M

US-60Hz

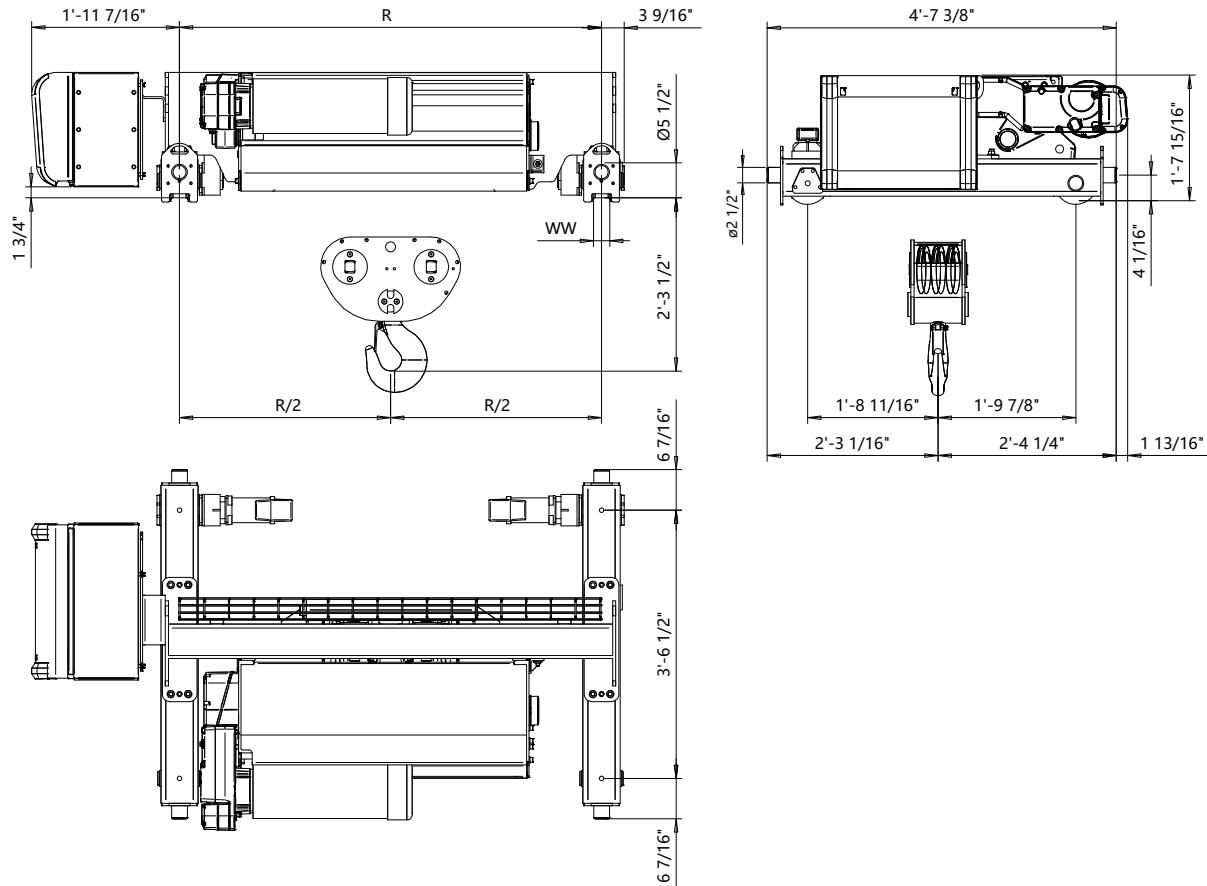

Headroom C-Dimension			Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 1: Steel rope without HS22 limit switch
27 1/2"	27 1/2"	27 1/2"	Case 2: Steel rope with HS22 limit switch
			Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated Weight *	
HOL (ft-in)	Length code	WW min	WW max	R min	R max	R min (lb)	R max (lb)
19'-8"	E	2 1/16"	3 1/4"	5'-6 15/16"	10'-2 1/16"	1193	1535
23'-11"	F	2 1/16"	3 1/4"	6'-6 3/4"	10'-2 1/16"	1347	1597
31'-6"	G	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	1495	1676
39'-4"	H	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	1590	1771
46'-11"	J	2 1/16"	3 1/4"	8'-10 5/16"	10'-2 1/16"	1733	1863
57'-9"	K	2 1/16"	3 1/4"	10'-2 1/16"	10'-2 1/16"	1996	1996

* Estimated weight with P5 hoist motor
Standard rail gauges are 5'-6 15/16", 6'-6 3/4", 7'-10 1/2", 8'-10 5/16", 10'-2 1/16".
Default trolley gauge is R min.

Load (ton)	Class
12	H4+
15	H4

Design		Chd	Appd	Ref Drawing	R10-M-26
Date		DOUBLE GIRDER HOIST			1:10
SLEQMECE Owner Dept		6 PART DOUBLE			Folder
R10062_M					Issue
					1

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

