


Double Girder - Medium, 8 PART SINGLE
Hoist type:
SXR10 081..M

SI

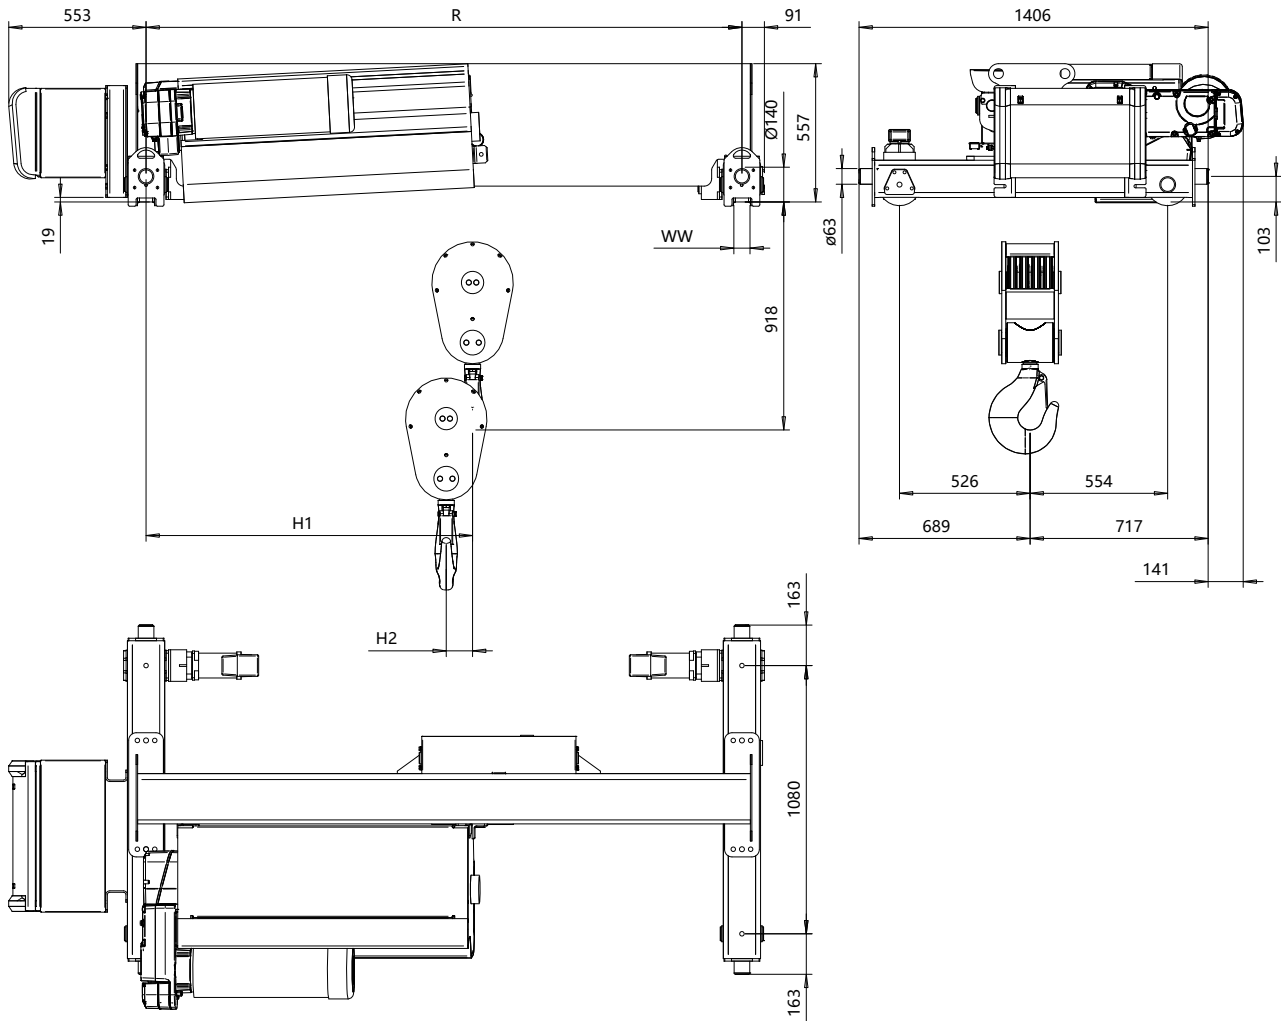

Headroom C-Dimension					Notes
Case 1	Case 2	Case 3	Case 4	Case 5	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
918	918	918	918	918	Case 3: Steel rope with HS22 L.S. & Rope angle sensor
					Case 4: Synthetic rope and HS22 limit switch
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor
					HS22 limit switch mandatory with synthetic rope

HOL	Length	H1	H2	WW min	WW max	R min	R max	Estimated weight *	
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6	D	1115	84	54	84	2000	2700	1012	1084
7.5	E	1315	106	54	84	2400	2700	1093	1125
9	F	1465	128	54	84	2700	2700	1157	1157

Load	Class	Class
(kg)	Fem/ISO	ASME
16000	2m/M5	H4
20000	1Am/M4	H3

* Estimated weight with P5 hoist motor

Standard rail gauges are 2000 mm, 2400 mm, 2700 mm.

Default trolley gauge is R min. Dim H1 listed is based on R min.

Rev	Explanation	Date	Revised by	Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-08
Date	DOUBLE GIRDER HOIST			
SLEIGHMECE Owner Dept	8 PART SINGLE			
R10081_M				1:10 Folder
				Issue 2