


Double Girder - Medium, 8 PART DOUBLE
Hoist type:
SXR10 082..M

SI

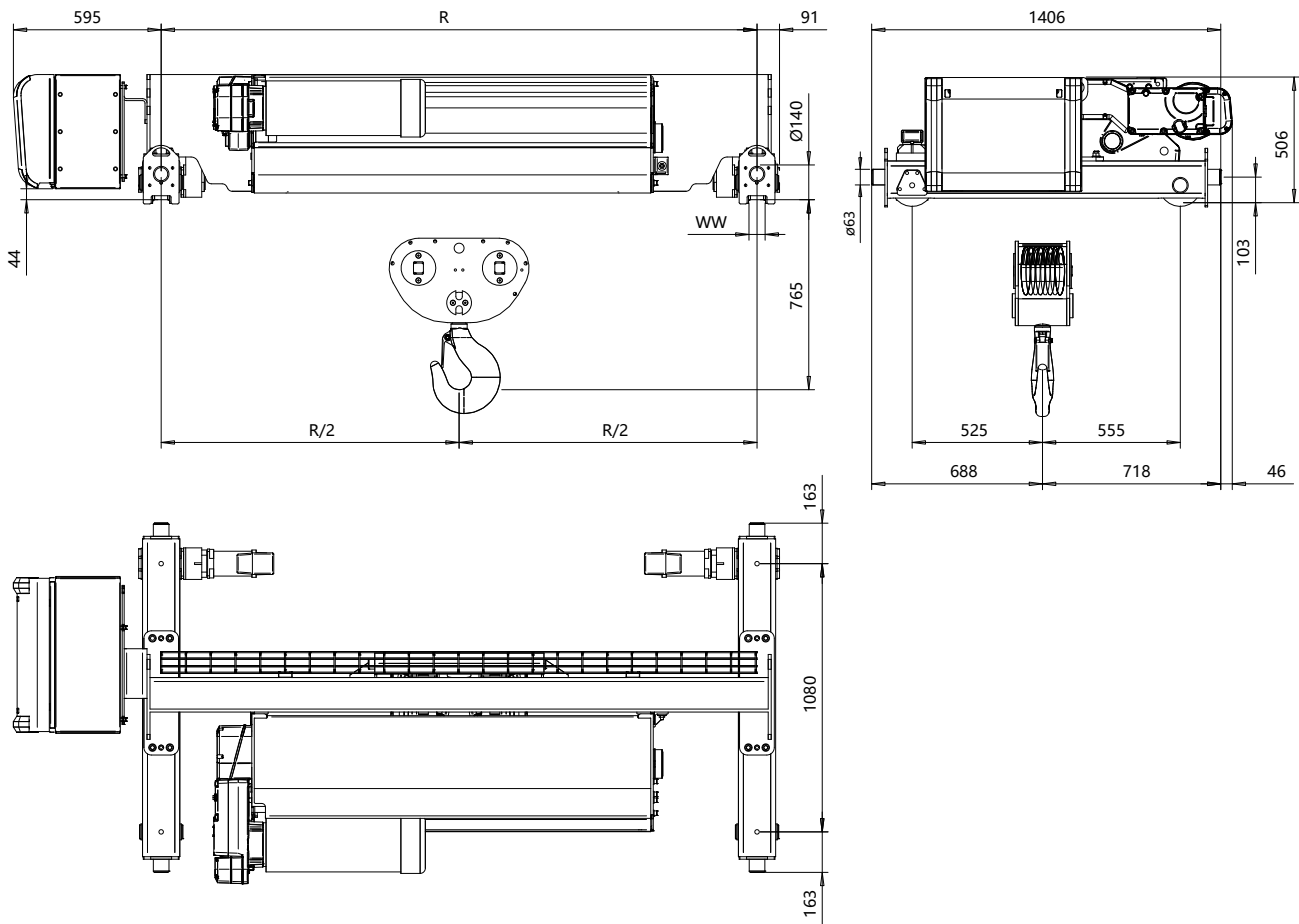

Headroom C-Dimension			Notes
Case 1	Case 2	Case 3	Case 1: Steel rope without HS22 limit switch
(mm)	(mm)	(mm)	Case 2: Steel rope with HS22 limit switch
765	765	765	Case 3: Steel rope with HS22 L.S. & Rope angle sensor


						Estimated weight *	
HOL	Length	WW min	WW max	R min	R max	R min	R max
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6.4	G	54	84	2400	3100	1070	1152
8	H	54	84	2400	3100	1125	1206
9.5	J	54	84	2700	3100	1202	1261
11.7	K	54	84	3100	3100	1334	1334

Load	Class	Class
(kg)	Fem/ISO	ASME
16000	2m/M5	H4
20000	1Am/M4	H3

* Estimated weight with P5 hoist motor
Standard rail gauges are 2400 mm, 2700 mm, 3100 mm.
Default trolley gauge is R min.

Rev	Explanation	Date	Revised by	Checked by
-----	-------------	------	------------	------------

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R10-M-28
Date	DOUBLE GIRDER HOIST			
SLEQMECE Owner Dept	8 PART DOUBLE			1:10 Folder
	R10082_M			Issue 2