


Double Girder - Medium, 8 PART DOUBLE
Hoist type:
SXR10 082..M

US-60Hz

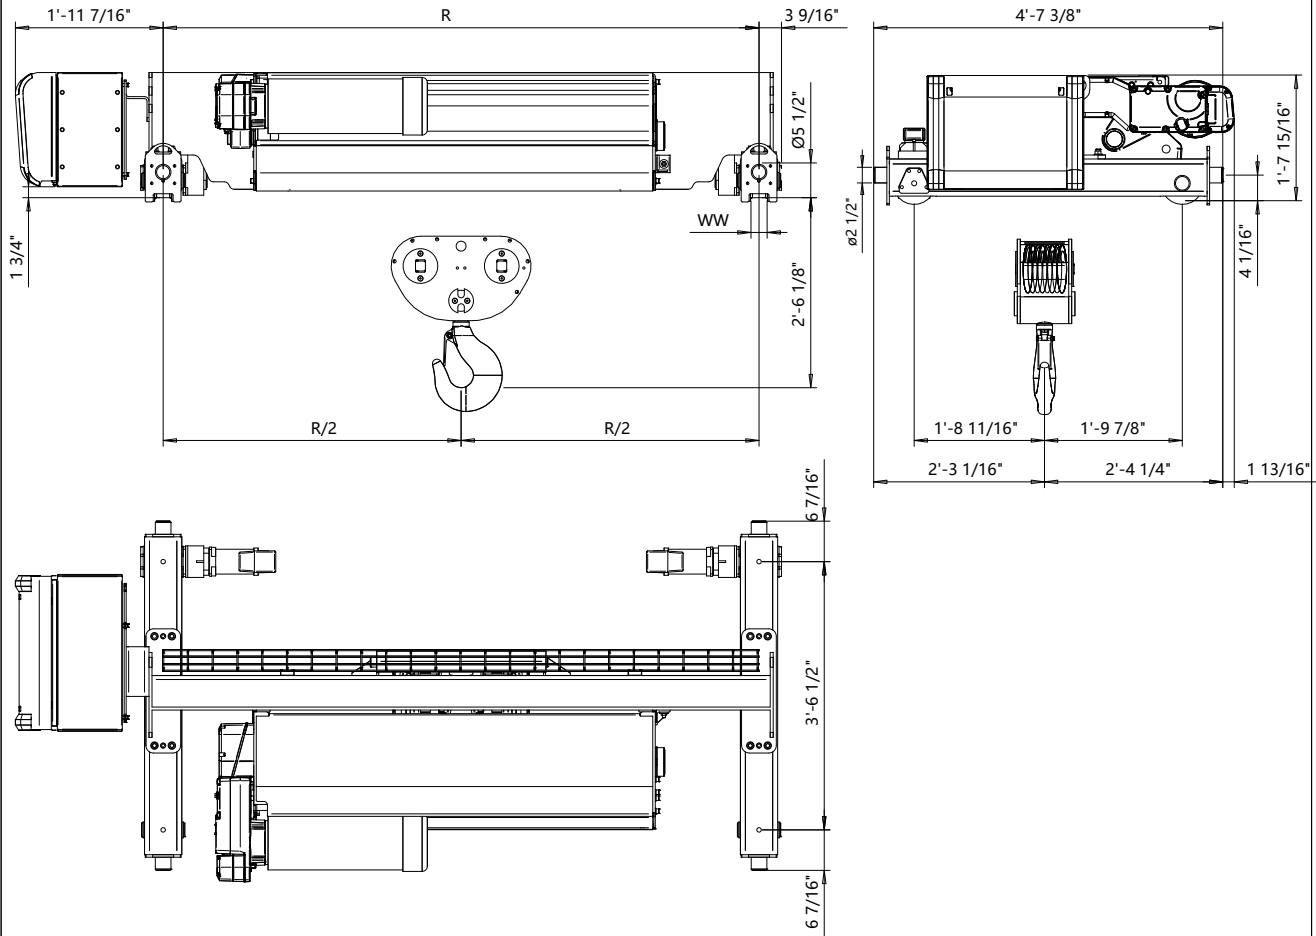

Headroom C-Dimension			Notes
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 1: Steel rope without HS22 limit switch
30 1/8"	30 1/8"	30 1/8"	Case 2: Steel rope with HS22 limit switch
			Case 3: Steel rope with HS22 L.S. & Rope angle sensor

						Estimated Weight *	
HOL (ft-in)	Length code	WW min	WW max	R min	R max	R min (lb)	R max (lb)
23'-0"	G	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2360	2540
26'-3"	H	2 1/16"	3 1/4"	7'-10 1/2"	10'-2 1/16"	2480	2660
31'-2"	J	2 1/16"	3 1/4"	8'-10 5/16"	10'-2 1/16"	2650	2780
38'-4"	K	2 1/16"	3 1/4"	10'-2 1/16"	10'-2 1/16"	2940	2940

* Estimated weight with P5 hoist motor
Standard rail gauges are 7'-10 1/2", 8'-10 5/16", 10'-2 1/16".
Default trolley gauge is R min.

Load (ton)	Class
15	H4
20	H3

Design	Chd	Appd	Ref Drawing	R10-M-28
Date	DOUBLE GIRDER HOIST			1:10
SLEIGHMECE Owner Dept	8 PART DOUBLE			
R10082_M				Issue 2

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

