


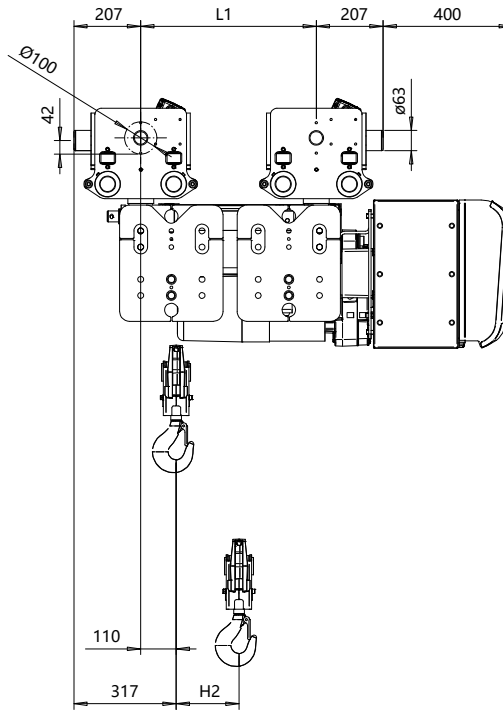


# Normal Headroom - Swivel Trolley for Curved Track, 2 PART SINGLE Hoist type:

SI

SXR3 021..U

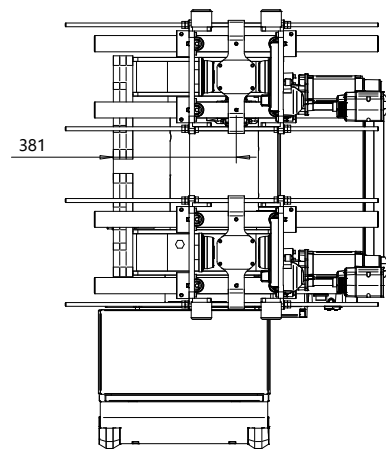

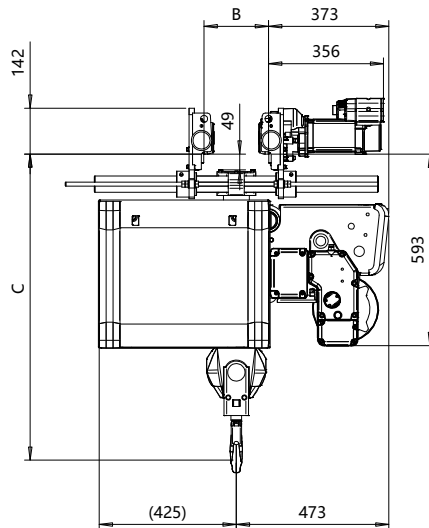

Flange Width	Headroom C-Dimension				
B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
100 - 450	817	947	1007	842	947
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated weight
(m)	code	(mm)	(mm)	(kg)
13	B	195	544	205
18	C	271	695	215

Load	Class	Class
(kg)	Fem/ISO	ASME
1000	3m/M6	H4+
1250	3m/M6	H4+
1600	2m/M5	H4

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R3-U-02
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			 1:10 Folder
SLEOMECE Owner Dept	FOR CURVED TRACK			
	2 PART SINGLE			Issue 1
	R3021 U			