

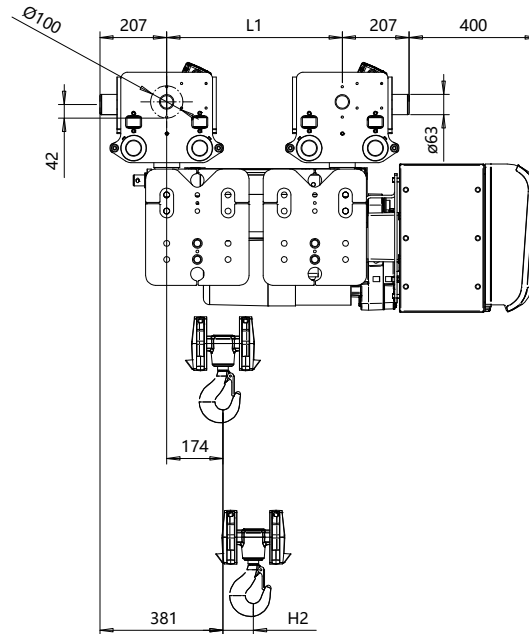
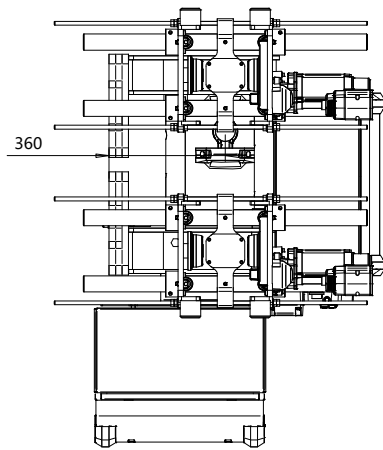


Normal Headroom - Swivel Trolley for Curved Track, 4 PART SINGLE Hoist type:

SI

SXR3 041..U

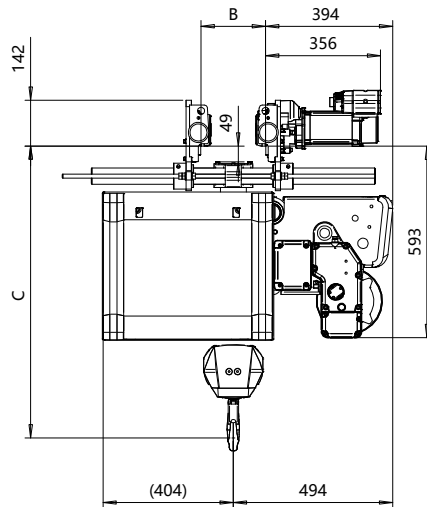

Flange Width	Headroom C-Dimension				
B-dimension	Case 1	Case 2	Case 3	Case 4	Case 5
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
100 - 450	709	904	964	789	914
Case 1: Steel rope without HS22 limit switch					
Case 2: Steel rope with HS22 limit switch					
Case 3: Steel rope with HS22 L.S. & Rope angle sensor					
Case 4: Synthetic rope with HS22 limit switch					
Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor					
HS22 limit switch mandatory with synthetic rope					

HOL	Length	H2	L1	Estimated weight
(m)	code	(mm)	(mm)	(kg)
6.5	B	94	544	218
9	C	132	695	228

Load (kg)	Class Fem/ISO	Class ASME
2000	3m/M6	H4+
2500	3m/M6	H4+
3200	2m/M5	H4

Rev Explanation Date Revised by Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R3-U-04
Date	NORMAL HEADROOM HOIST - SWIVEL TROLLEY			
SLEQMECE Owner Dept	FOR CURVED TRACK			
4 PART SINGLE				Folder
R3041_U				Issue
				1