


Double Girder - Medium, 2 PART SINGLE

Hoist type:

SXR5 021..M

US-60Hz

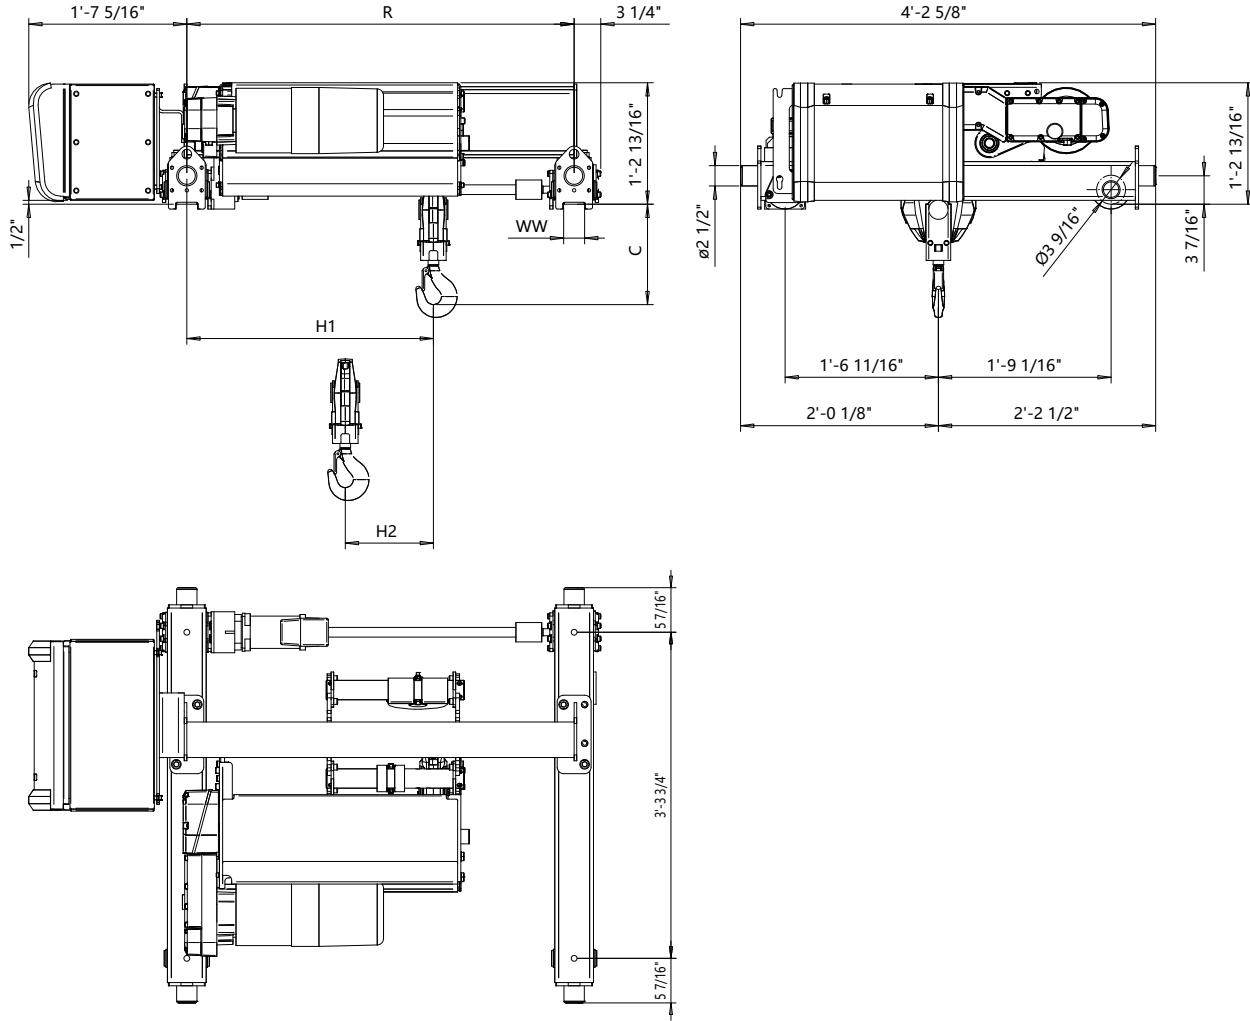

Headroom C-Dimension					Notes	
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 4 (inch)	Case 5 (inch)	Case 1: Steel rope without HS22 limit switch	Case 2: Steel rope with HS22 limit switch
13 3/16"	18 1/2"	20 7/8"	13 11/16"	17 15/16"	Case 3: Steel rope with HS22 L.S. & Rope angle sensor	
					Case 4: Synthetic rope and HS22 limit switch	
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor	
					HS22 limit switch mandatory with synthetic rope	

HOL (ft-in)	Length code	H1	H2	Estimated Weight *				
				WW min	WW max	R min	R max	
21'-4"	B	2'-0 1/8"	3 5/8"	2"	2 3/4"	2'-11 7/16"	6'-6 3/4"	690 770
29'-6"	C	2'-6 1/8"	5 7/16"	2"	2 3/4"	3'-11 1/4"	6'-6 3/4"	760 810
39'-4"	D	3'-1 1/4"	14 3/8"	2"	2 3/4"	4'-7 1/8"	6'-6 3/4"	810 850

Load (ton)	Class
2	H4+
2 1/2	H4

* Estimated weight with P3 hoist motor

Standard rail gauges are 2'-11 7/16", 3'-11 1/4", 4'-7 1/8", 5'-6 15/16", 6'-6 3/4".

Dim H1 listed is based on R min.

Rev: Explanation Date: Reviewed by: Checked by:

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.

The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R5-M-02
Date	DOUBLE GIRDER HOIST			1:10
SLEO MEC E Owner Dept	2 PART SINGLE			Folder
				Issue 2
	R5021_M			