


Double Girder - Medium, 4 PART SINGLE
Hoist type:
SXR5 041..M

SI

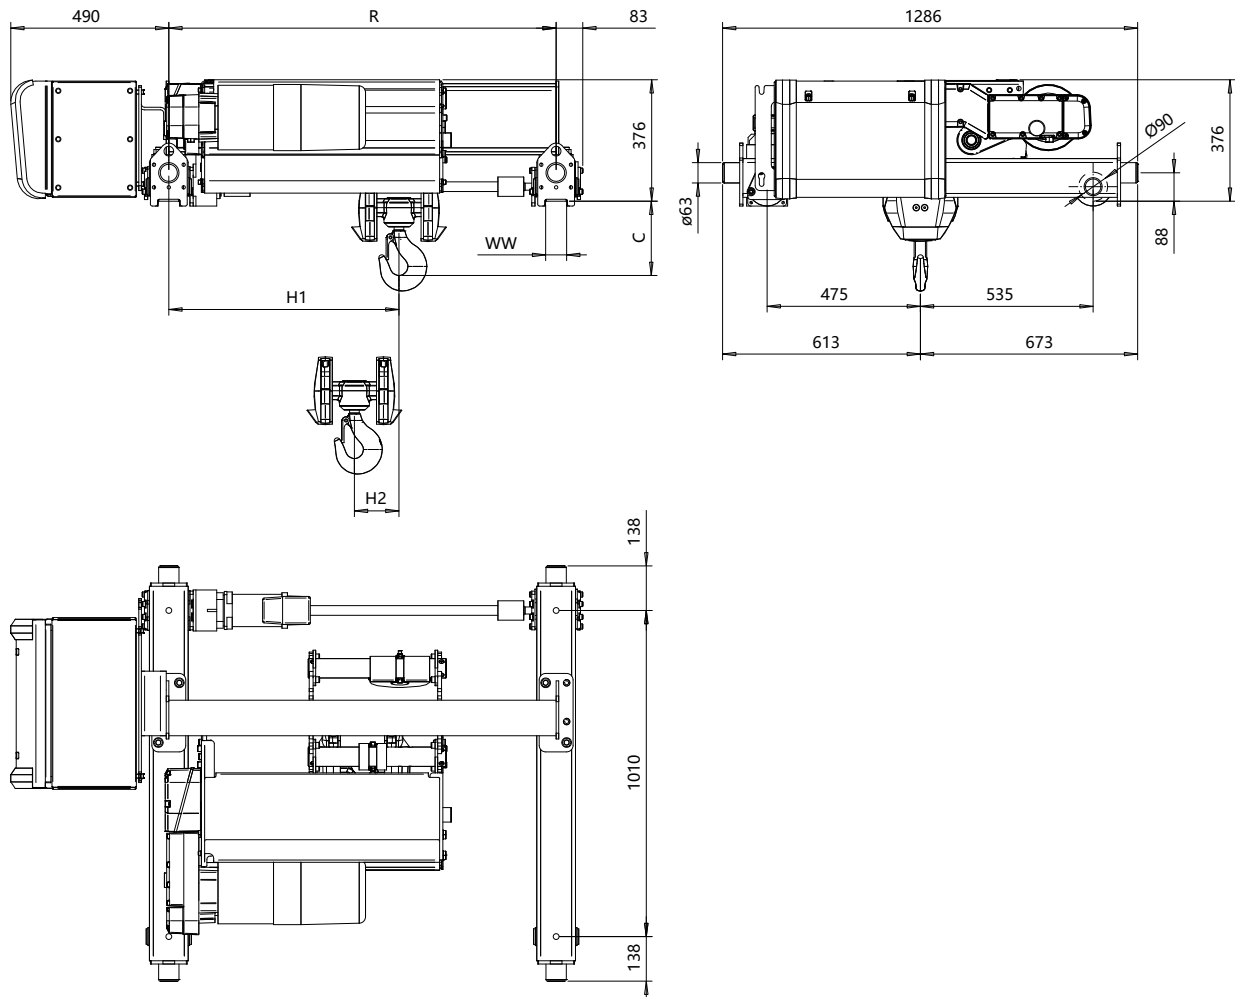

Headroom C-Dimension					Notes
Case 1 (mm)	Case 2 (mm)	Case 3 (mm)	Case 4 (mm)	Case 5 (mm)	Case 1: Steel rope without HS22 limit switch
230	410	470	300	395	Case 2: Steel rope with HS22 limit switch
					Case 3: Steel rope with HS22 L.S. & Rope angle sensor
					Case 4: Synthetic rope and HS22 limit switch
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor
					HS22 limit switch mandatory with synthetic rope

HOL	Length	H1	H2	WW min	WW max	R min	R max	Estimated weight *	
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)
6.5	B	545	96	50	70	900	2000	327	363
9	C	695	135	50	70	1200	2000	354	381
12	D	875	181	50	70	1400	2000	381	399

Load (kg)	Class Fem/ISO	Class ASME
2000	3m/M6	H4+
3200	3m/M6	H4+
4000	3m/M6	H4+
5000	2m/M5	H4
6300	1Am/M4	H3

* Estimated weight with P3 hoist motor

Standard rail gauges are 900 mm, 1200 mm, 1400 mm, 1700 mm, 2000 mm.
Dim H1 listed is based on R min.

Rev	Explanation	Date	Revised by	Checked by

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	R5-M-04
Date	DOUBLE GIRDER HOIST			
SLEQMECE Owner Dept	4 PART SINGLE			
R5041_M				1:10 Folder
				Issue 1