


Double Girder - Medium, 4 PART SINGLE  
 Hoist type:  
 SXR5 041..M

US-60Hz

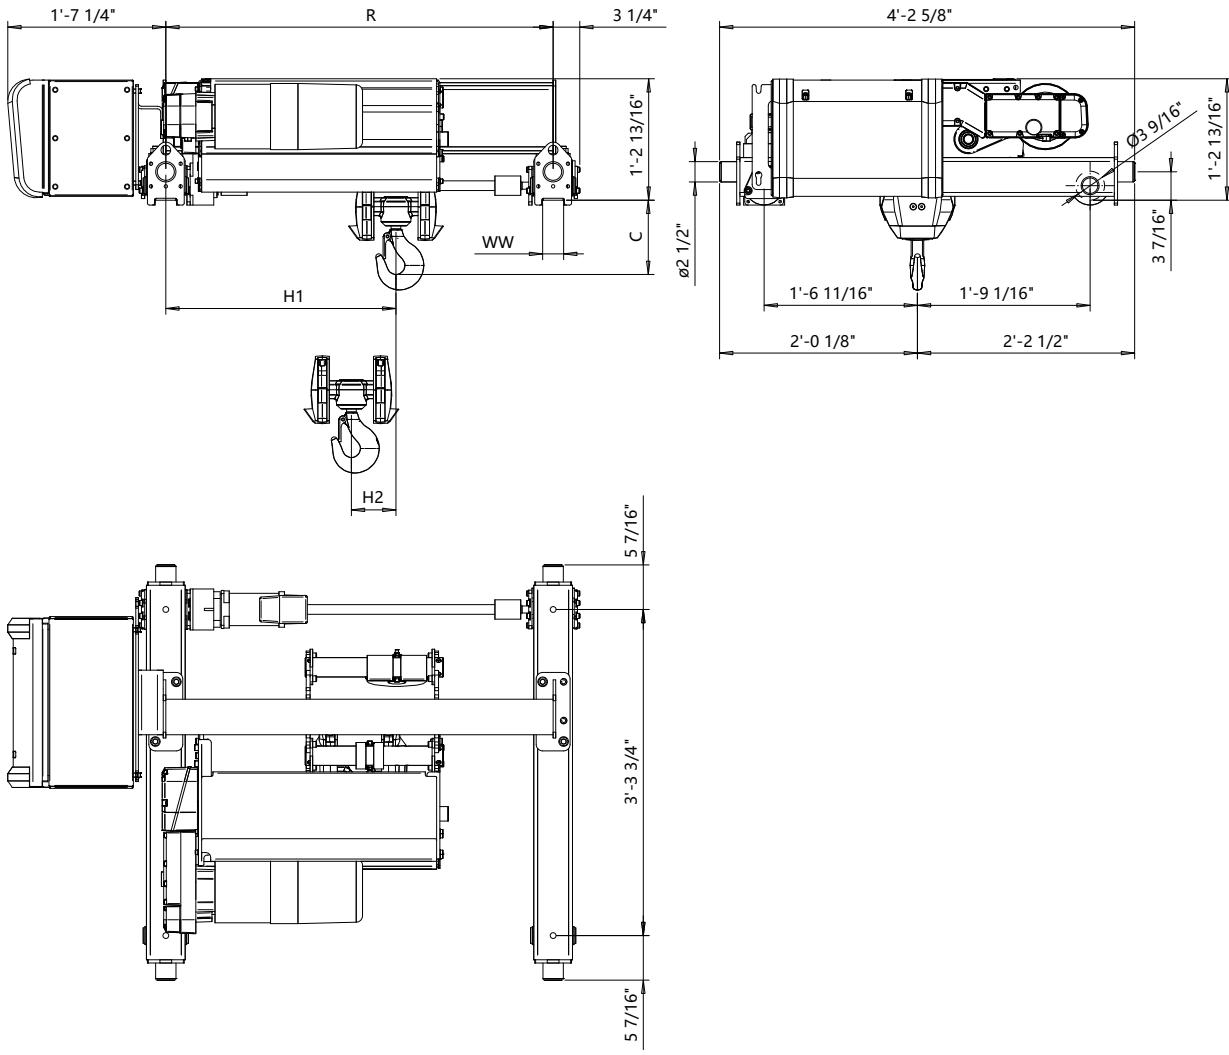

Headroom C-Dimension					Notes	
Case 1 (inch)	Case 2 (inch)	Case 3 (inch)	Case 4 (inch)	Case 5 (inch)	Notes	
9 1/16"	16 1/8"	18 1/2"	11 11/16"	15 9/16"	Case 1: Steel rope without HS22 limit switch	
					Case 2: Steel rope with HS22 limit switch	
					Case 3: Steel rope with HS22 L.S. & Rope angle sensor	
					Case 4: Synthetic rope and HS22 limit switch	
					Case 5: Synthetic rope with HS22 L.S. & Rope angle sensor	
					HS22 limit switch mandatory with synthetic rope	

HOL (ft-in)	Length code	H1	H2	WW min	WW max	R min	R max	Estimated Weight *	
								R min (lb)	R max (lb)
21'-4"	B	1'-9 1/2"	3 1/4"	2"	2 3/4"	2'-11 7/16"	6'-6 3/4"	720	800
29'-6"	C	2'-3 3/8"	5 5/16"	2"	2 3/4"	3'-11 1/4"	6'-6 3/4"	780	840
39'-4"	D	2'-10 1/2"	7 1/8"	2"	2 3/4"	4'-7 1/8"	6'-6 3/4"	840	880

\* Estimated weight with P3 hoist motor

Standard rail gauges are 2'-11 7/16", 3'-11 1/4", 4'-7 1/8", 5'-6 15/16", 6'-6 3/4".

Dim H1 listed is based on R min.

Rev: Explanation Date: Reviewed by: Checked by:

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.

The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

Design	Chd	Appd	Ref Drawing	RS-M-04
Date	DOUBLE GIRDER HOIST			1:10
SLEO/MECE Owner Dept	4 PART SINGLE			
	R5041_M		Issue 1	