


Hook suspended (perpendicular version)

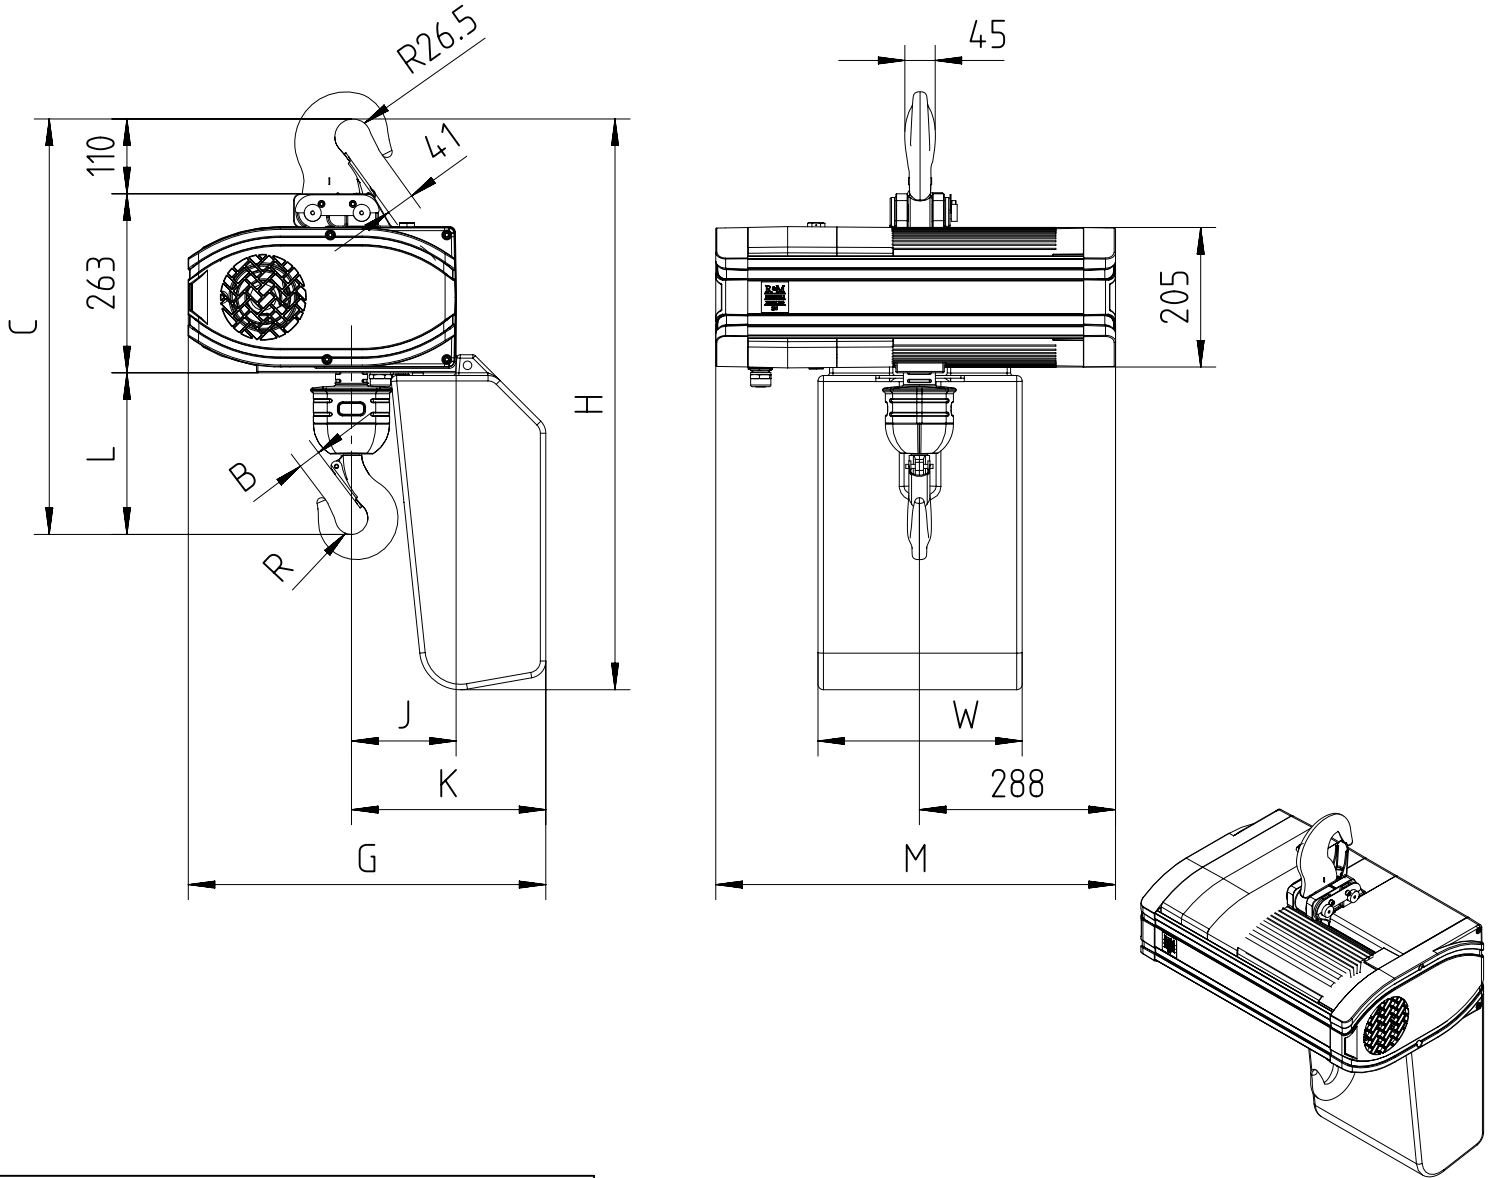

Note: In case of 2-fall hoist, suspension hook is rotated by 180°.
 Note: Add 60mm to C & L dimension for hoisting speeds greater than 8 m/min.

Chain Size (mm)	Max load (Kg)	Falls	Chain bag capacity (m)	Dimensions (mm)											Weight of chain (kg/m)	Estimated weight of hoist w/o chain (kg)			
				B	C	L	R	J	K	G	H	W	M			LK	GLS	DB	
													LK/	GLS					DB
11.3X31	2500	1	12	33	611	238	24	154	286	525	839	300	587	709	2.8	108	113	114	
			30 (*)						443	682	960								
			50 (*)						515	754	1160								
	5000	2	12 (**)	41	711	388	28	203	334	525	839	300	587	709	2.8	112	117	118	
			30 (*,**)						494	682	960								
			50 (*,**)						563	754	1160								

GLS: Gear Limit Switch (*) For these heights of lift, customer has to link the chain bag to the structure.
 DB : Double Brake (**) In case of 2-fall hoist, available lifting height is half of the chain bag maximum capacity.