
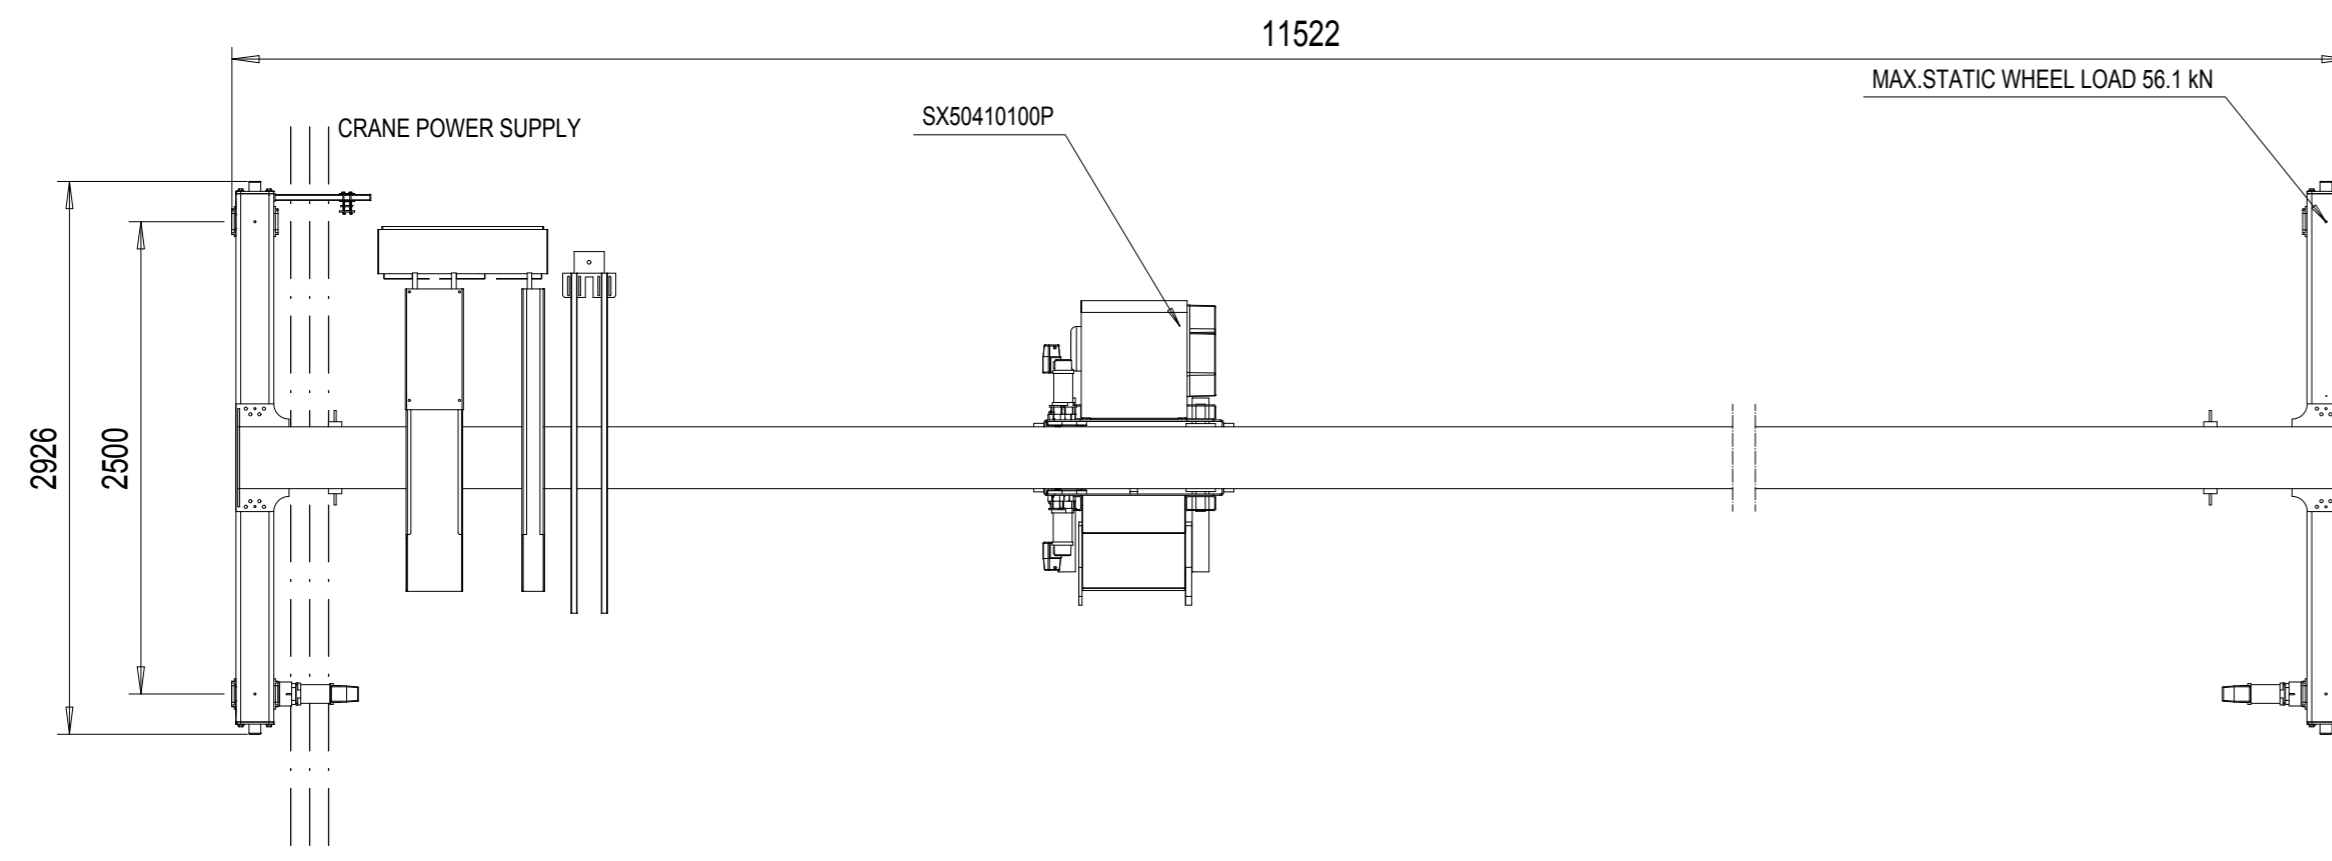


VIEW A-A

SPECIFY NORTH



TECHNICAL DATA

LOAD	: 10000 kg
SPAN	: 11,28 m
LIFTING HEIGHT	: 9 m
HOISTING SPEED	: 6/1 m/min 2-speed
TRAVERSING SPEED	: 20 m/min stepless
TRAVELLING SPEED	: 32 m/min stepless
WEIGHT OF TROLLEY	: 630 kg
WEIGHT OF BRIDGE	: 3040 kg
MAIN/CONTROL VOLTAGE	: 460 / 115 V; 60 Hz
CRANE GROUP	: A3
HOIST GROUP	: FEM M5
CRANE DRIVE GROUP	: FEM M5
SUPPLY POWER	: 12.78 kW
LENGTH OF RUNWAY	: 0 m

SURFACE TREATMENT OF CRANE

BRIDGE COLOR : Safety Yellow
 PAINT : A/127 µm

Crane tolerances
 acc.to drawing CST00A3
 Runway tolerances must comply with
 standard ISO12488-1 tolerance class 2

CUSTOMER ORGANIZES SAFE
 PLATFORM FOR CRANE SERVICE

Indoor Use crane 5°...40° C
 Radio controlled crane

ACCEPTED BY:

COMPANY:

DATE:

Pos	Amount	Description	Specification
	GBE/RMS		DAS /2.66.9
	Design	Chd	Vx.proj
	27.03.2015	Appd	Ref drawing
	Date		
	Regional Sales Office Canada		
	Dept		
		QXSk10t x 11.3m Hol:9m	1:40
			M-film
			Issue
			08.49



LM-RXCP10T37-O