


RU20 UNDER RUNNING END TRUCK

Wheelbase, SS (mm)	Max Dyn. Corner Load (kN)	L (mm)	Approx. Wt. (kg)	H (mm)
1800	143.8	2480	717	300
2300	143.8	2980	776	300
2800	143.8	3480	834	300
3200	143.8	3880	980	360
3500	143.8	4180	1016	360
4000	143.8	4680	1087	360

Dyn Load = 1.15 * Static Load

Buffer type	L1 (mm)	D1 (mm)
A	53	63
B	68	80
C	85	100
D	105	125
E	150	100
F	190	125
G	100	100
K	80	80
M	125	125
A, B, C, D rubber E, F, G, K, M polyurethane		

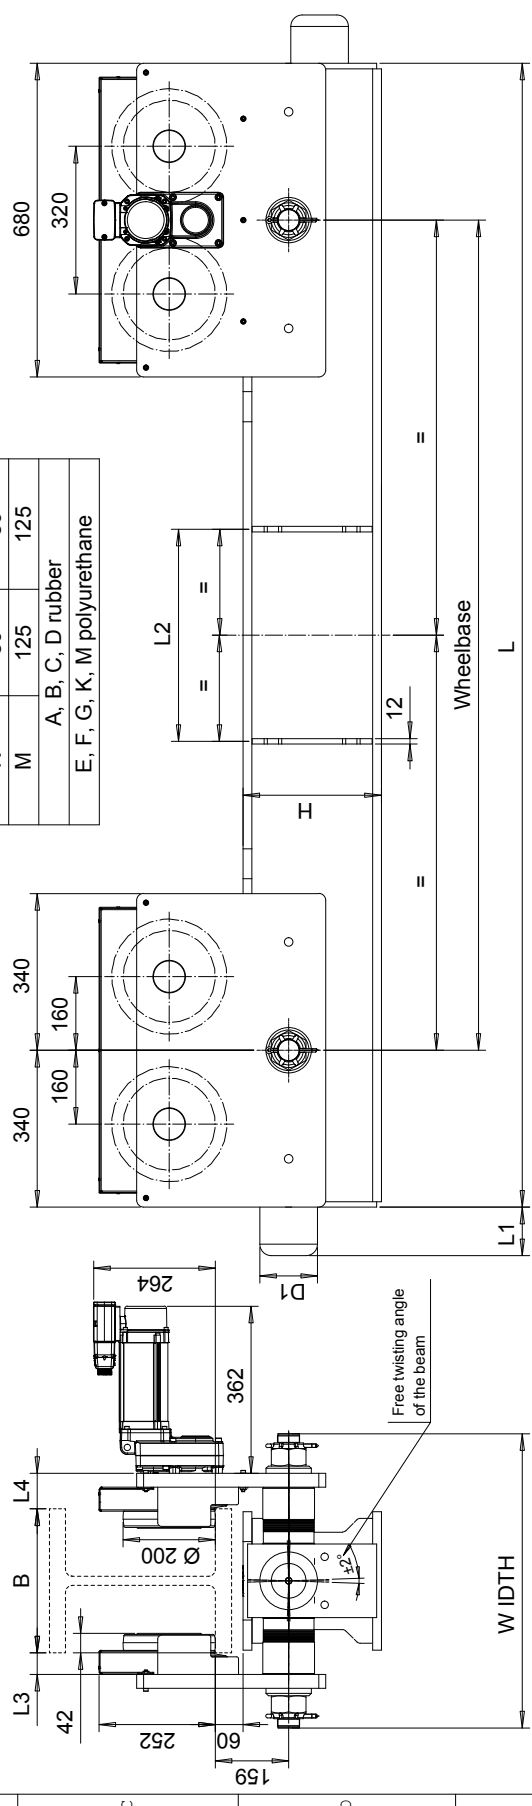

Location of stiffeners	L2 (mm)
Joint Plate Type	L2 (mm)
No Joint Plate	460
SD3, BD3, BD4	460
SD4, BD5	560
SD5	660

Flange width range, B (mm)	L3 (mm)	L4 (mm)	WIDTH (mm)
127 - 210	46	76	534
211 - 314	46	76	638
315 - 418	46	76	742
No patented track option			

Pos	Description	Specification	Id	Drawing
Design	ETTPA	ETTPA		
Date	2012-04-11	END TRUCK		Ref Drawing
Part	SLEDDOCV	OUTLINE DRAWING		
Code	R&M	RU20		
Company	R&M MATERIALS HANDLING INC.	RU20 END TRUCK		
Version	1.7			
Issue	UU20			
Date	5/20/18			