NORMAL HEADROOM, 4 PART SINGLE

Hoist type:

SX2041..N0

SX3041..N0

SI

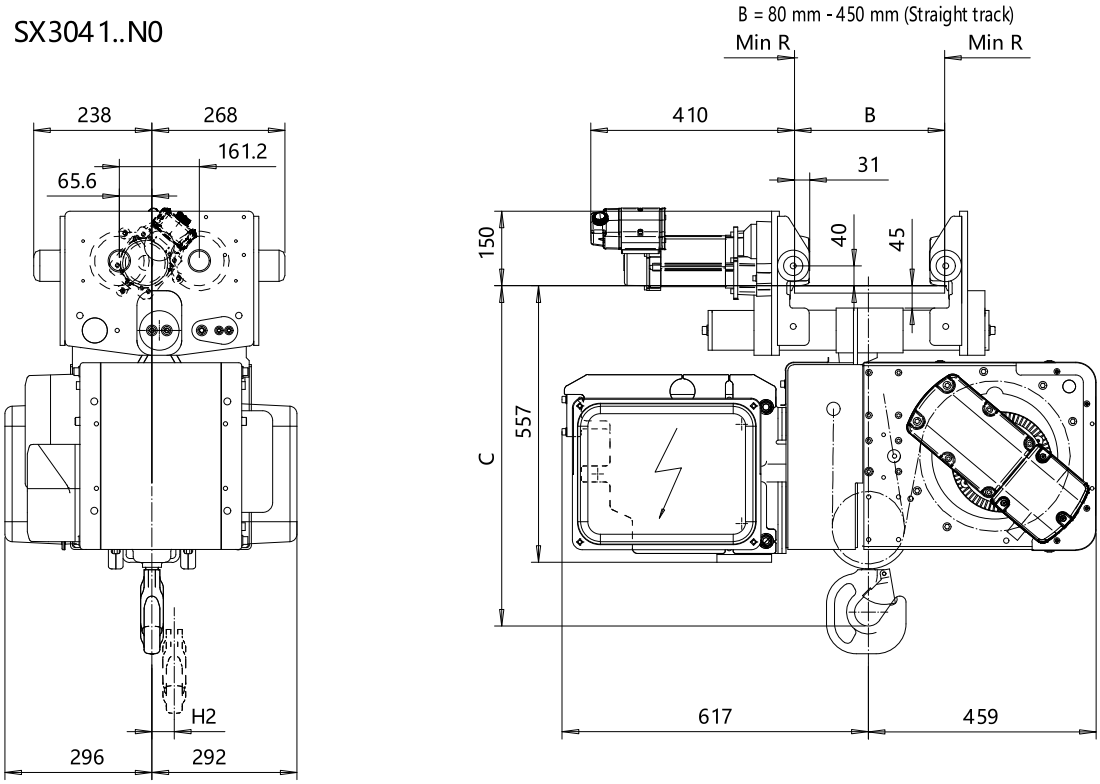

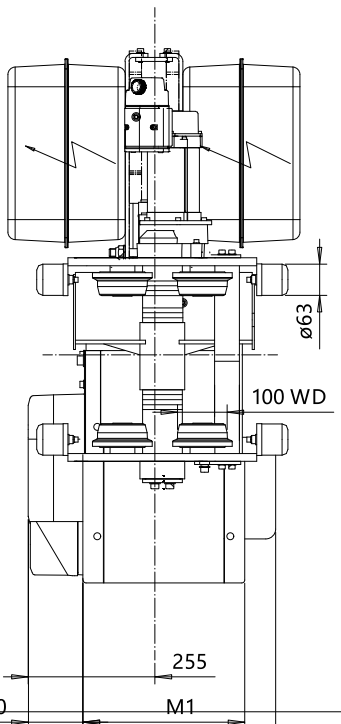

Motor	P1	P2	P3	A3	S3
MOT (mm)	385	446	476	446	526
Weight (kg)	21	31	35	32	28

Minimum Radius Curve	
Flange, B	Min R
(mm)	(mm)
80 - 109	2500
110 - 119	2000
120 - 450	1500

Headroom - C dimension	
Standard	730 mm
with HS22 Hook operated limit switch	830 mm

HOL	Length	H2	M1	Approx Weight
(m)	code	(mm)	(mm)	(kg)
6	A	45	326	260
9.5	C	72	456	300

Load	Class
(kg)	Fem/ISO
1600	3m/M6
2000	2m/M5
2500	3m/M6
3200	2m/M5

Rev	Description	Date	Revised by	Checked by
1		2002-08-26	ETTPAL	
3	SI-60HZ hoisting speeds added	2003-10-10	ETTTAV	
4	Hoist gear and motor combination H+P3 added	2004-04-21	ETTTLE	
5	Trolley and beams updated	2005-05-16	ETTVPH	

Approx. weight calculated with P1 motor.

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc.
The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QA-N-04
2002-08-26 Date	TROLLEY; NORMAL HEADROOM			1:6.5
SLEQDOCV Owner Dept	4 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING INC HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	D002082-A		Issue 12