


DOUBLE GIRDER, ADJUSTABLE LOAD BEAM, 6 PART SINGLE
 Hoist type:
 SX5 061...D0

US-60Hz

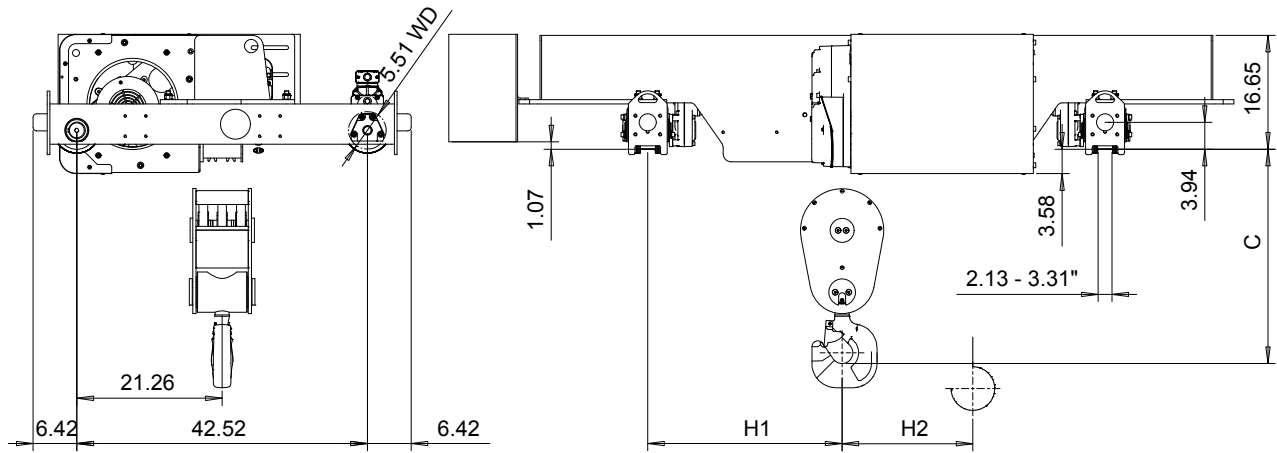

Motor	P5	P6	P7	A5	S5	S7
MOT (in)	22.76	22.76	24.33	19.61	23.86	29.8
Weight (lb)	128	187	231	99	117	179

Load (ton)	Class ASME
12	H4+
15	H4

HOL (ft)	Length code	M1 (inch)	M2 (inch)	H1 (inch)	H2 (inch)	TW (inch)	Min R	Max R	Approx Weight (lb)
19'-8"	D	21.97	29.84	28.54	2.09	104.65	5'-6 15/16"	8'-0"	1973
26'-3"	E	26.69	29.84	28.54	3.07	104.65	5'-6 15/16"	8'-0"	1973
32'-10"	F	32.6	35.94	34.65	3.86	104.65	6'-6 3/4"	8'-0"	2007

Headroom - C dimension	
Standard	31.1"
with HS22 Hook operated limit switch	33.1"

Note: H1 and M2 are calculated from Min R.
 Special rail gauges
 Approx weight calculated with P5 motor

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTPAL Design	ETTPAL Chd	Appd	Ref Drawing	QC-ALB-06
2018-10-01 Date	TROLLEY; DOUBLE GIRDER			1:12
SLEQDQCV Owner Dept	ADJUSTABLE LOAD BEAM, 6 ROPE FALLS			Folder
R&M MATERIALS HANDLING INC.	R&M MATERIALS HANDLING, INC. HOIST & CRANE PRODUCTS SPRINGFIELD, OHIO	55279565-vxp1-1		Issue 1