


Double Girder Hoist EXSX6, REEVING: 021; Class I, Division 2

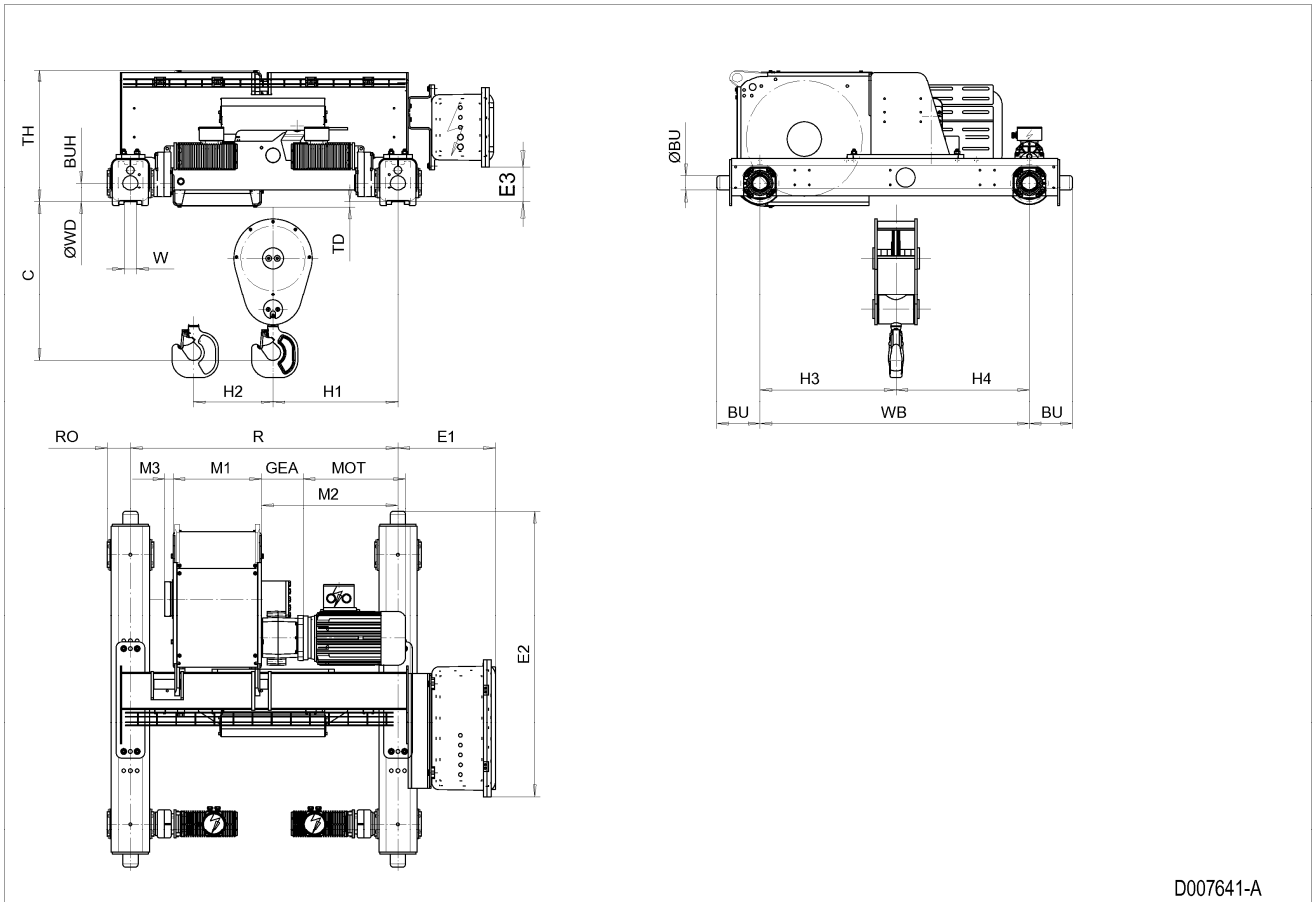

D007641-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	H1 mm	H2 mm	Min R mm	Max R mm	Weight** kg
15.5	10	C	462	714	654	139	1400	1400	1750
21	15.5	D	562	799	739	188	1700	2700	1820
28	22.5	E	682	799	739	251	1700	3100	1860
36	30.5	F	832	949	889	322	2000	3100	1950
47	41.5	G	1022	1149	1089	421	2400	3800	2070
61	55.5	H	1272	1469	1409	546	3100	4200	2240
80.5	75	J	1622	1559	1499	721	3400	4200	2450
97	91.5	K	1922	1944	1884	868	4200	4200	2700

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kg.

Motor Dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF06LA
Weight (kg)	7.8

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
830	200	80	226	100	509.8	1493.2	184.5	218	712	698	44
RO	TD	TH	WB	W min	W max						
122	28	692	1410	54	99						

D007641_A
252860

Note: All dimensions in mm.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.