


Double Girder Hoist EXSX6, REEVING: 021; Class I, Division 2

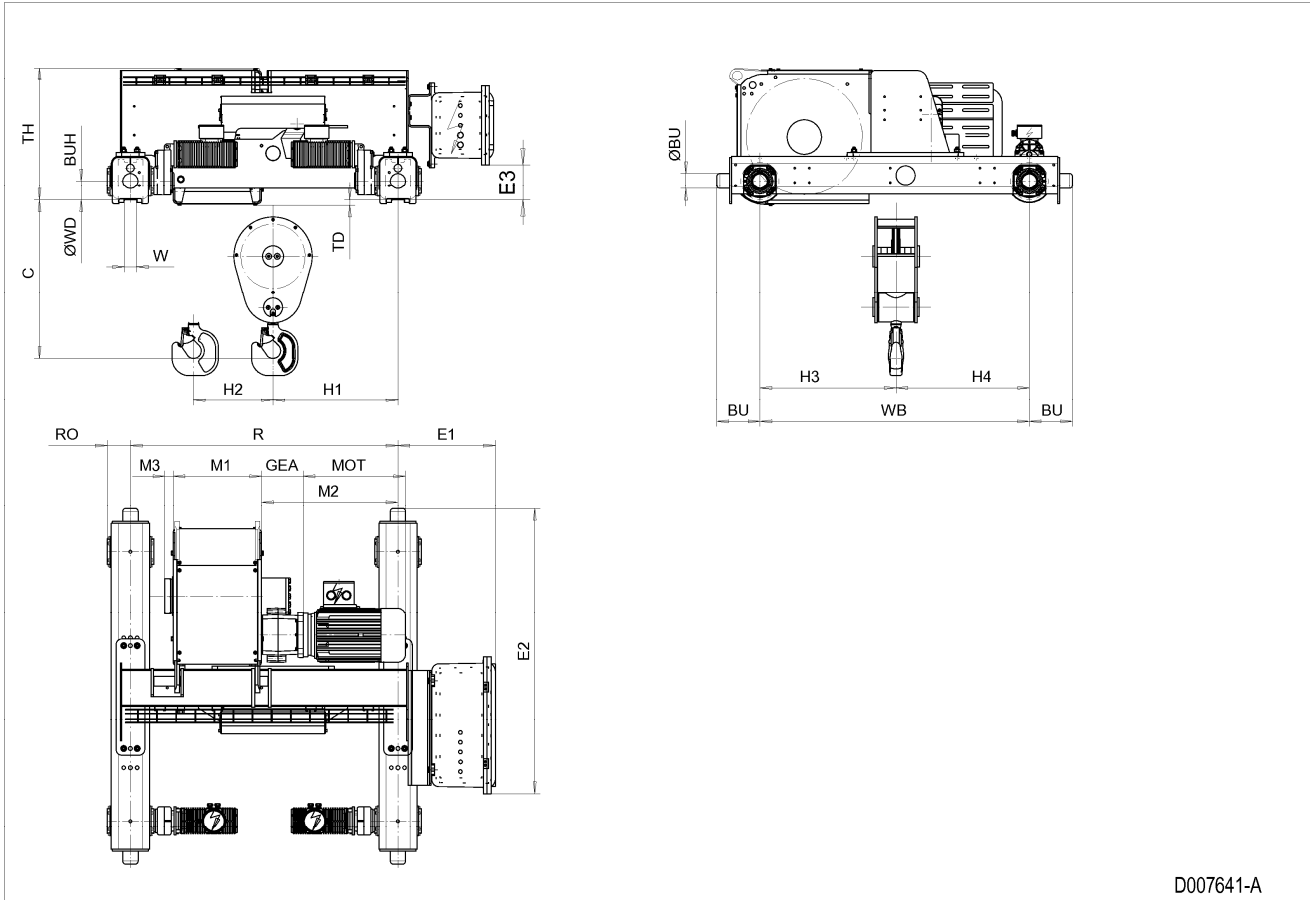

D007641-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	H1 inch	H2 inch	Min R inch	Max R inch	Weight** lb
50'-10"	32'-10"	C	18.19	28.11	25.75	5.47	55.12	55.12	3859
68'-11"	50'-10"	D	22.13	31.46	29.09	7.4	66.93	106.3	4013
91'-10"	73'-10"	E	26.85	31.46	29.09	9.88	66.93	122.05	4101
118'-1"	100'-1"	F	32.76	37.36	35	12.68	78.74	122.05	4300
154'-2"	136'-2"	G	40.24	45.24	42.87	16.57	94.49	149.61	4564
200'-2"	182'-1"	H	50.08	57.83	55.47	21.5	122.05	165.35	4939
264'-1"	246'-1"	J	63.86	61.38	59.02	28.39	133.86	165.35	5402
318'-3"	300'-2"	K	75.67	76.54	74.17	34.17	165.35	165.35	5954

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
Weight (lb)	17

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
32.68	7.87	3.15	8.9	3.94	20.07	58.79	7.26	8.58	28.03	27.48	1.73
RO	TD	TH	WB	W min	W max						
4.8	1.1	27.24	55.51	2.13	3.9						

D007641_A

252860

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.