


Normal Headroom Hoist EXSX6, REEVING: 021; Class I, Division 2

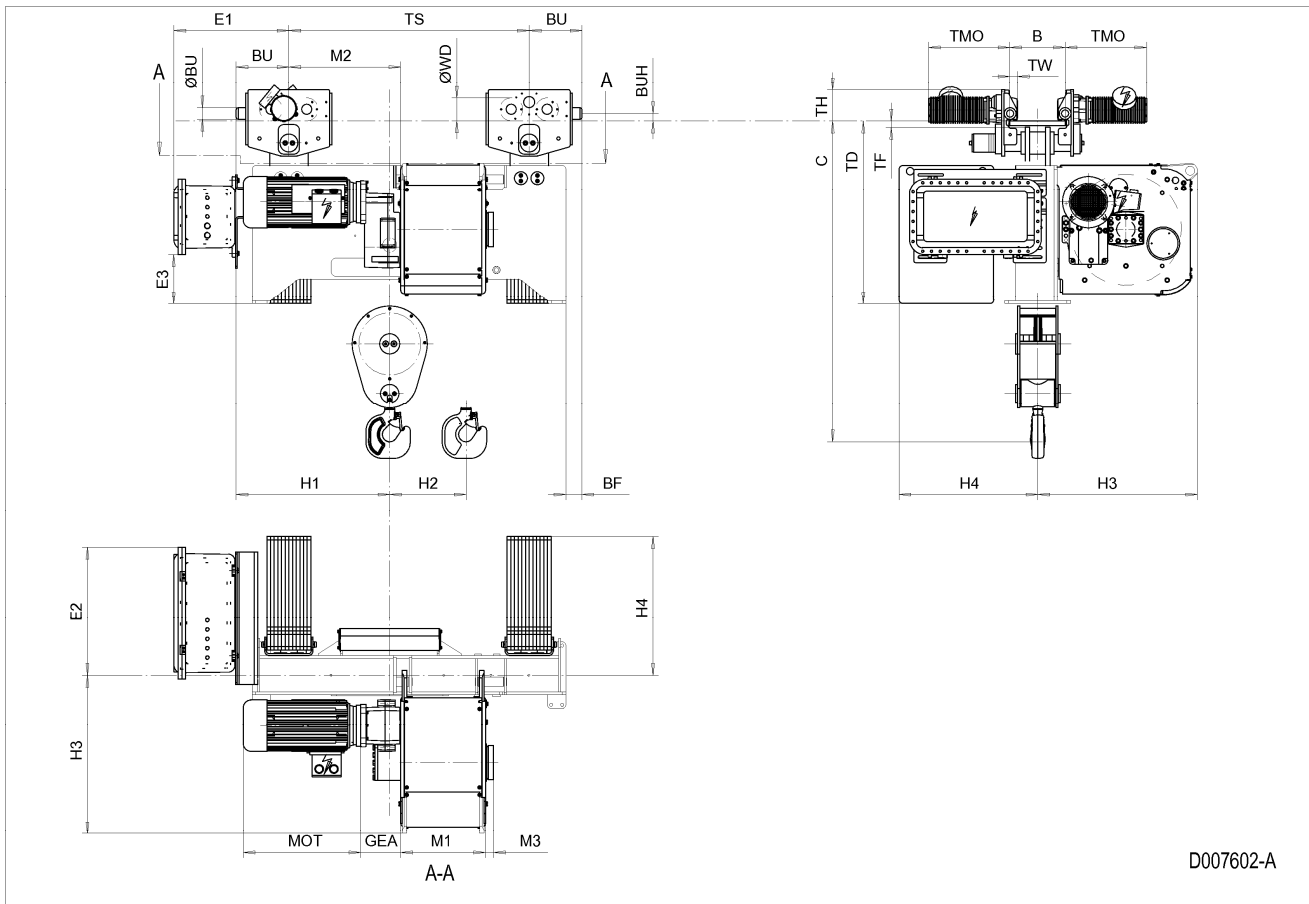

D007602-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	TS mm	BF mm	H1 mm	H2 mm	H3 mm	H4 mm	Weight** kg
15.5	10.5	C	462	610	1310	88	838	139	871	756	2200
21	16	D	562	610	1310	88	838	188	871	756	2300
28	23	E	682	560	1540	88	788	251	871	756	2400
36	31	F	832	560	1540	88	788	322	871	756	2500
47	42	G	1022	640	2050	88	868	421	871	756	2700
61	56	H	1272	640	2050	88	868	546	871	756	2800
80.5	75.5	J	1622	600	1910	-371	828	721	871	756	3200
97	92	K	1922	600	1910	-371	828	868	871	756	3500

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF06LA
TMO (mm)	398
Weight (kg)	7.8

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
120	610	1752	125	63	288	40	626.6	697.7	269.1	218	44
TD	TF	TH	TW								
998	35	170	41.5								

D007602_A
252558

Note: Weight calculated with P6 and MF06LA motors when B=300 mm.

Note: All dimensions in mm.