


Normal Headroom Hoist EXSX6, REEVING: 021; Class I, Division 2

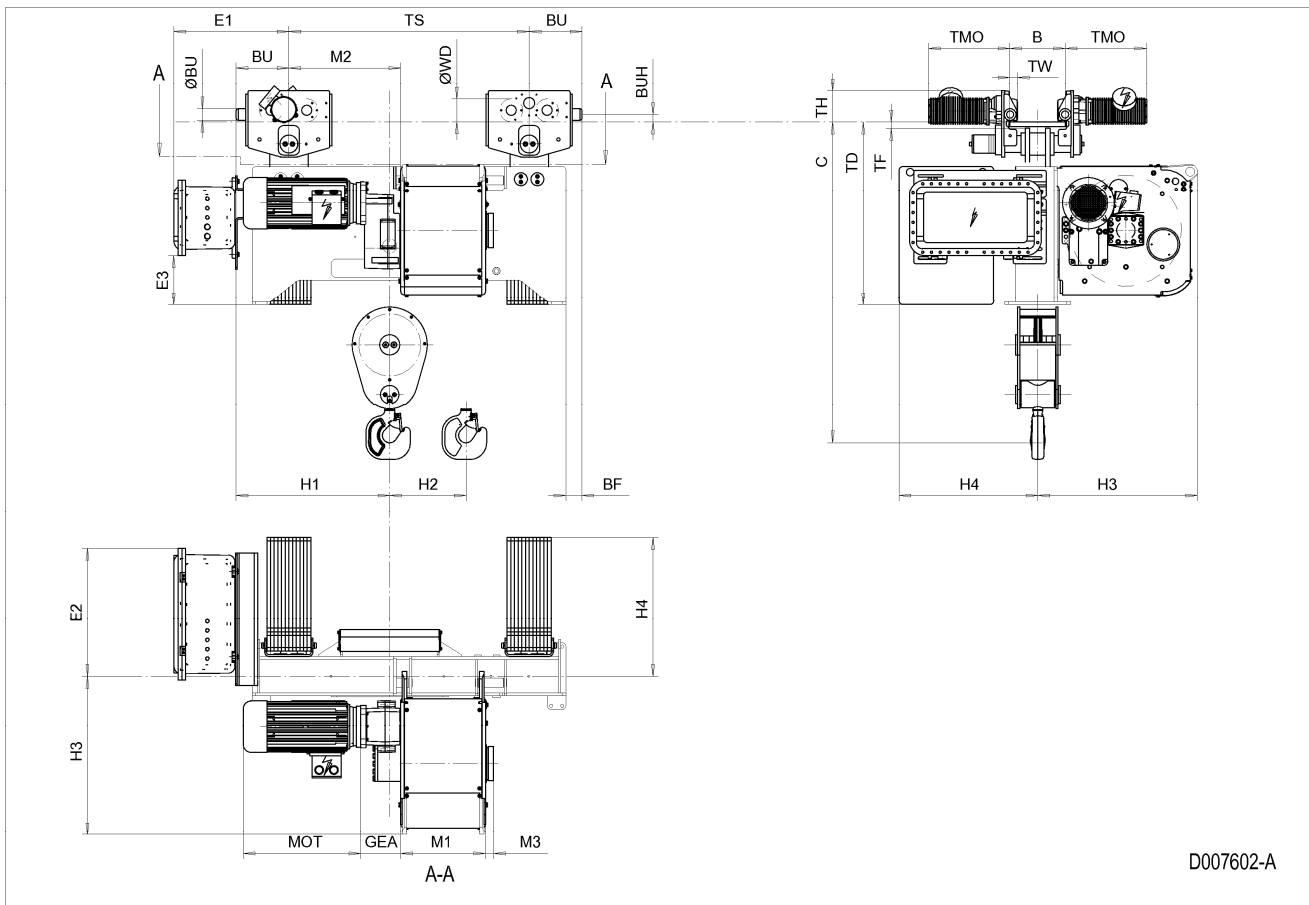

D007602-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	TS inch	BF inch	H1 inch	H2 inch	H3 inch	H4 inch	Weight** lb
50'-10"	34'-5"	C	18.19	24.02	51.57	3.46	32.99	5.47	34.29	29.76	4851
68'-11"	52'-6"	D	22.13	24.02	51.57	3.46	32.99	7.4	34.29	29.76	5072
91'-10"	75'-6"	E	26.85	22.05	60.63	3.46	31.02	9.88	34.29	29.76	5292
118'-1"	101'-8"	F	32.76	22.05	60.63	3.46	31.02	12.68	34.29	29.76	5513
154'-2"	137'-10"	G	40.24	25.2	80.71	3.46	34.17	16.57	34.29	29.76	5954
200'-2"	183'-9"	H	50.08	25.2	80.71	3.46	34.17	21.5	34.29	29.76	6174
264'-1"	247'-8"	J	63.86	23.62	75.2	-14.61	32.6	28.39	34.29	29.76	7056
318'-3"	301'-10"	K	75.67	23.62	75.2	-14.61	32.6	34.17	34.29	29.76	7718

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
TMO (inch)	15.67
Weight (lb)	17

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
4.72	24.02	68.98	4.92	2.48	11.34	1.57	24.67	27.47	10.59	8.58	1.73
TD	TF	TH	TW								
39.29	1.38	6.69	1.63								

D007602_A

252558

Note: Weight calculated with P6 and MF06LA motors when B=11.8 inch.

Note: All dimensions in inch.