


Double Girder Hoist EXSX6, REEVING: 022; Class I, Division 2

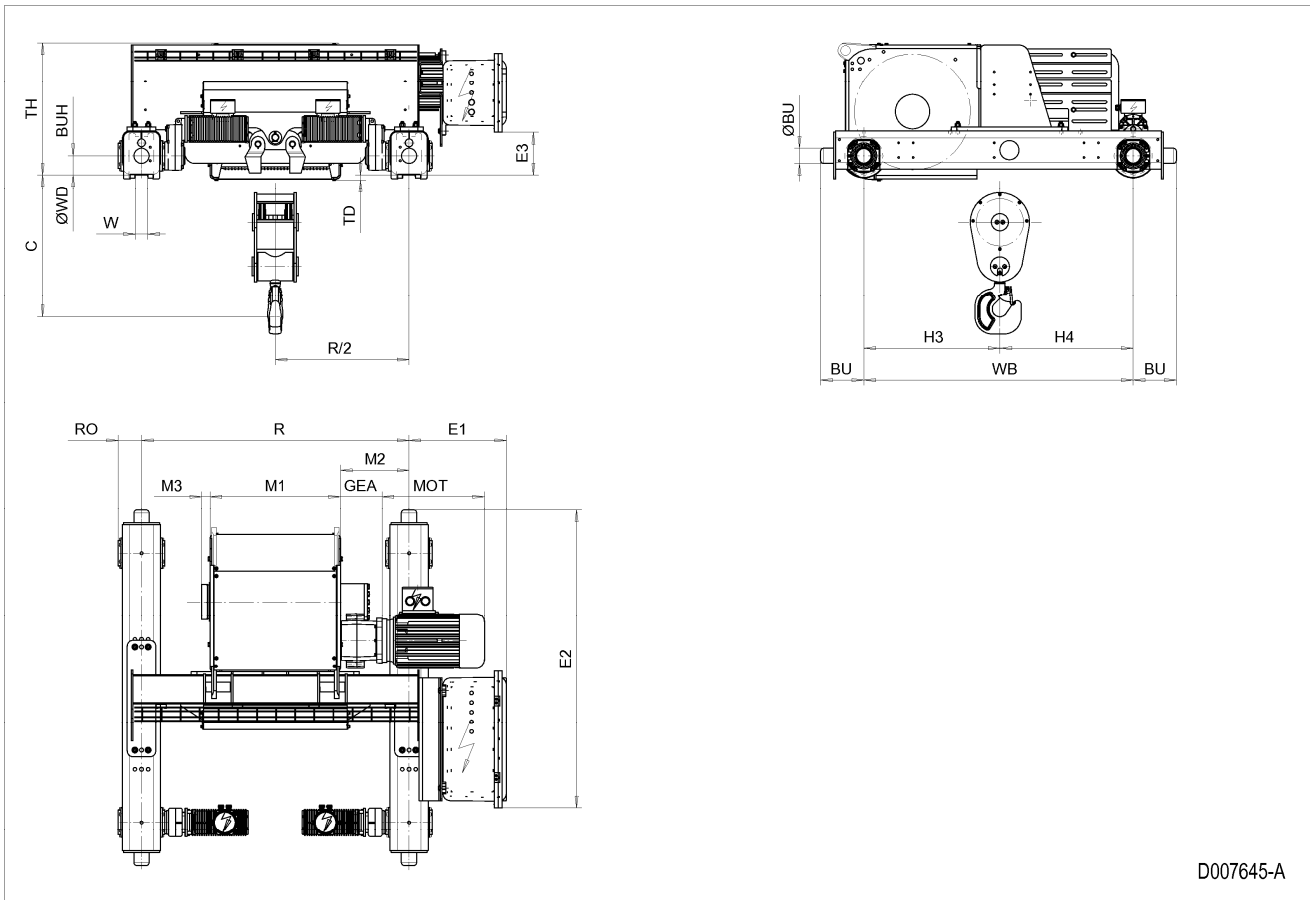

D007645-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	Min R mm	Max R mm	Weight** kg
15	8.5	E	682	359	1400	2000	1810
21	14.5	F	832	434	1700	2400	1880
28.5	22	G	1022	339	1700	2700	1950
38	31.5	H	1272	364	2000	3100	2060
51.5	45	J	1622	389	2400	3400	2220
63.5	57	K	1922	389	2700	3800	2390
77	70.5	L	2272	414	3100	4200	2590
87	80.5	M	2522	439	3400	4200	2740
98.5	92	N	2822	489	3800	4200	2930

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor Dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF06LA
Weight (kg)	7.8

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
745	200	80	226	100	509.8	1558.5	223.1	218	712	698	44
RO	TD	TH	WB	W min	W max						
122	28	692	1410	54	99						

D007645_A
252869

Note: All dimensions in mm.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.