


Double Girder Hoist EXSX6, REEVING: 022; Class I, Division 2

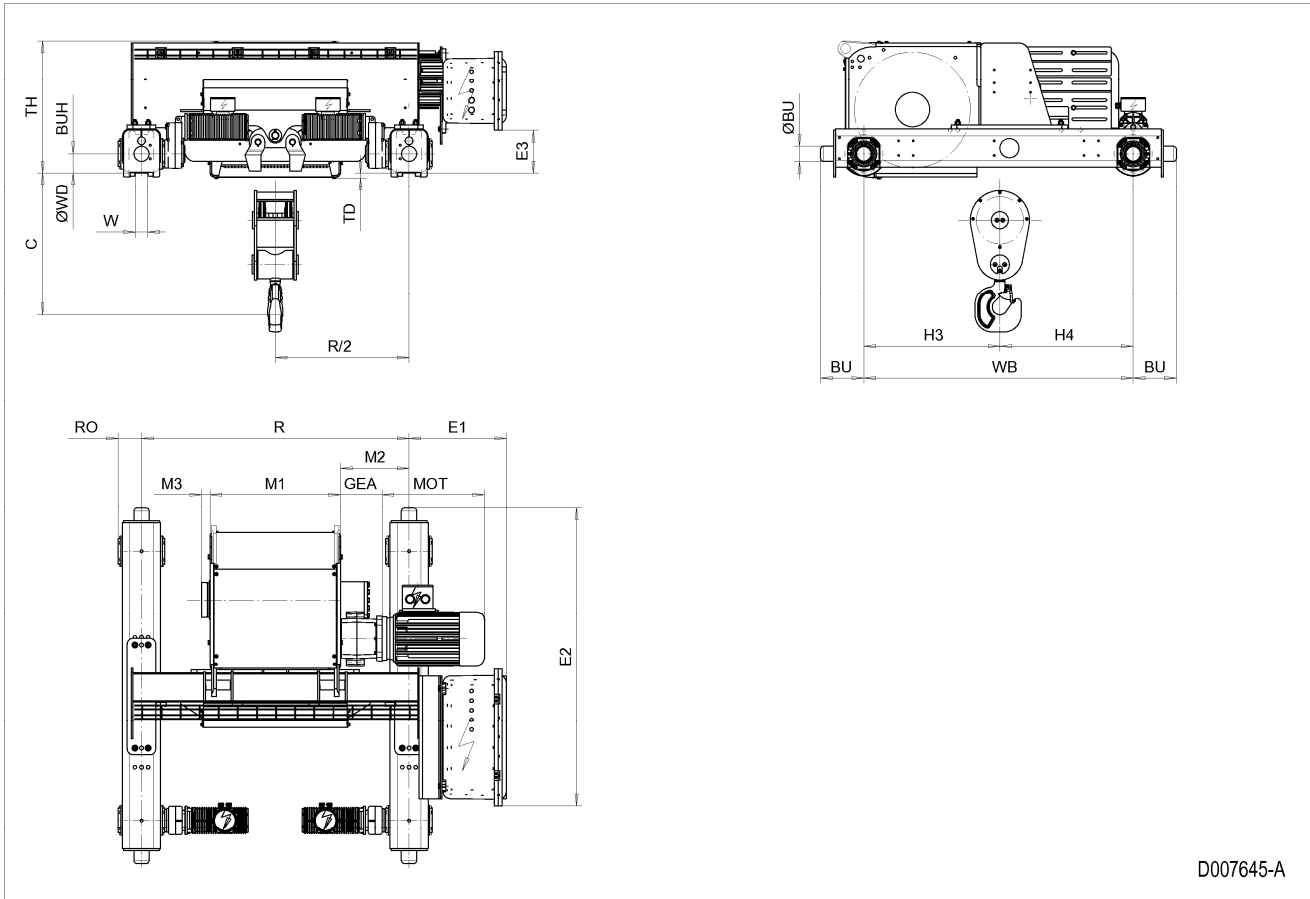

D007645-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	Min R inch	Max R inch	Weight** lb
49'-3"	27'-11"	E	26.85	14.13	55.12	78.74	3991
68'-11"	47'-7"	F	32.76	17.09	66.93	94.49	4145
93'-6"	72'-2"	G	40.24	13.35	66.93	106.3	4300
124'-8"	103'-4"	H	50.08	14.33	78.74	122.05	4542
168'-12"	147'-8"	J	63.86	15.31	94.49	133.86	4895
208'-4"	187'-0"	K	75.67	15.31	106.3	149.61	5270
252'-7"	231'-4"	L	89.45	16.3	122.05	165.35	5711
285'-5"	264'-1"	M	99.29	17.28	133.86	165.35	6042
323'-2"	301'-10"	N	111.1	19.25	149.61	165.35	6461

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
Weight (lb)	17

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
29.33	7.87	3.15	8.9	3.94	20.07	61.36	8.78	8.58	28.03	27.48	1.73
RO	TD	TH	WB	W min	W max						
4.8	1.1	27.24	55.51	2.13	3.9						

D007645_A
252869

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.