


Double Girder Hoist EXSX6, REEVING: 041; Class I, Division 2

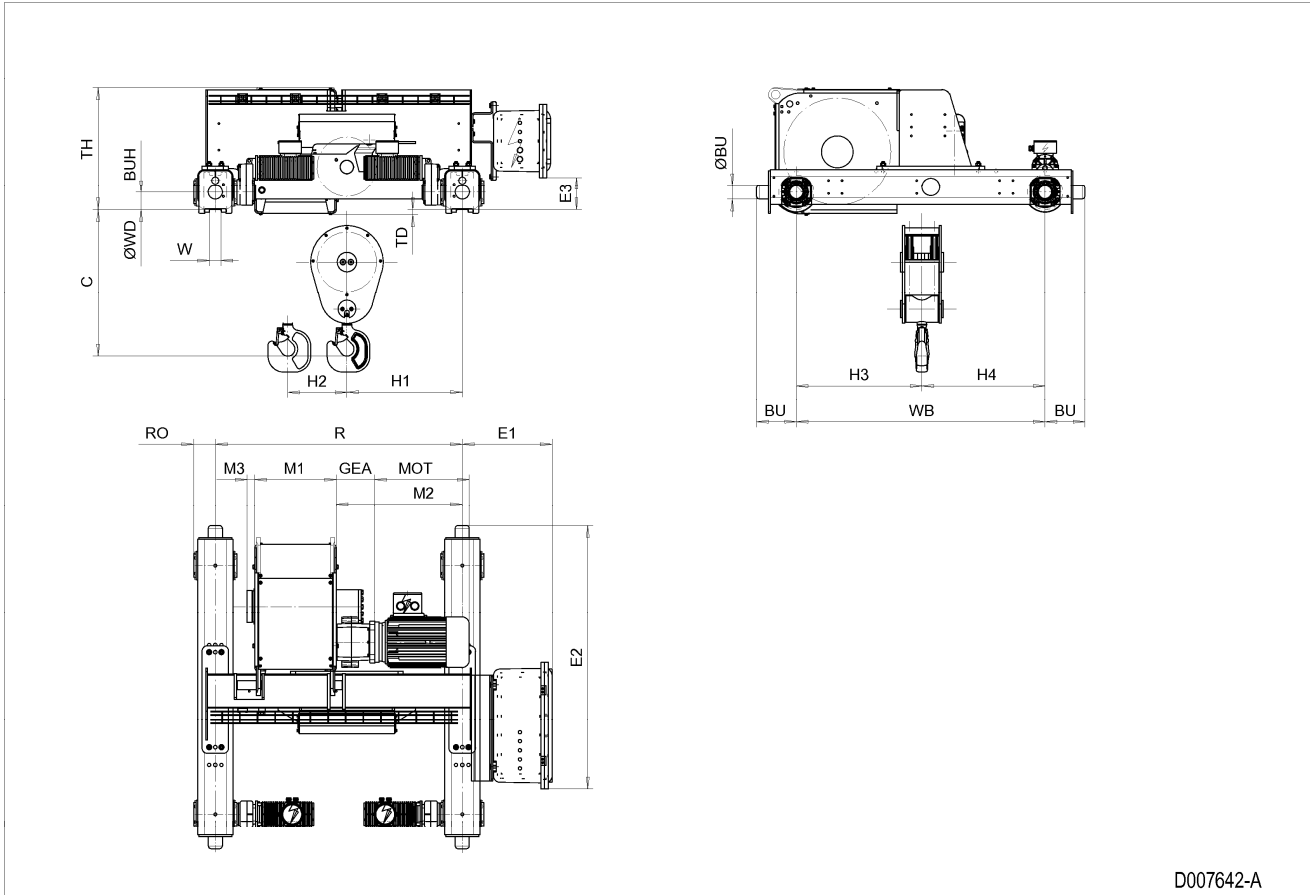

D007642-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	H1 inch	H2 inch	Min R inch	Max R inch	Weight** lb
24'-7"	14'-9"	C	18.19	28.11	25.75	2.72	55.12	55.12	3969
34'-5"	24'-7"	D	22.13	31.46	29.09	3.7	66.93	106.3	4101
45'-11"	36'-1"	E	26.85	31.46	29.09	4.92	66.93	122.05	4212
59'-1"	49'-3"	F	32.76	37.36	35	6.34	78.74	122.05	4410
77'-1"	67'-3"	G	40.24	45.24	42.87	8.27	94.49	149.61	4675
100'-1"	90'-3"	H	50.08	57.83	55.47	10.75	122.05	165.35	5049
131'-3"	121'-5"	J	63.86	61.38	59.02	14.17	133.86	165.35	5513
159'-1"	149'-3"	K	75.67	76.54	74.17	17.09	165.35	165.35	6064

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
Weight (lb)	17

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
32.68	7.87	3.15	8.9	3.94	20.07	58.79	7.26	8.58	28.03	27.48	1.73
RO	TD	TH	WB	W min	W max						
4.8	1.1	27.24	55.51	2.13	3.9						

D007642_A
252865

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.