


Double Girder Hoist EXSX6, REEVING: 042; Class I, Division 2

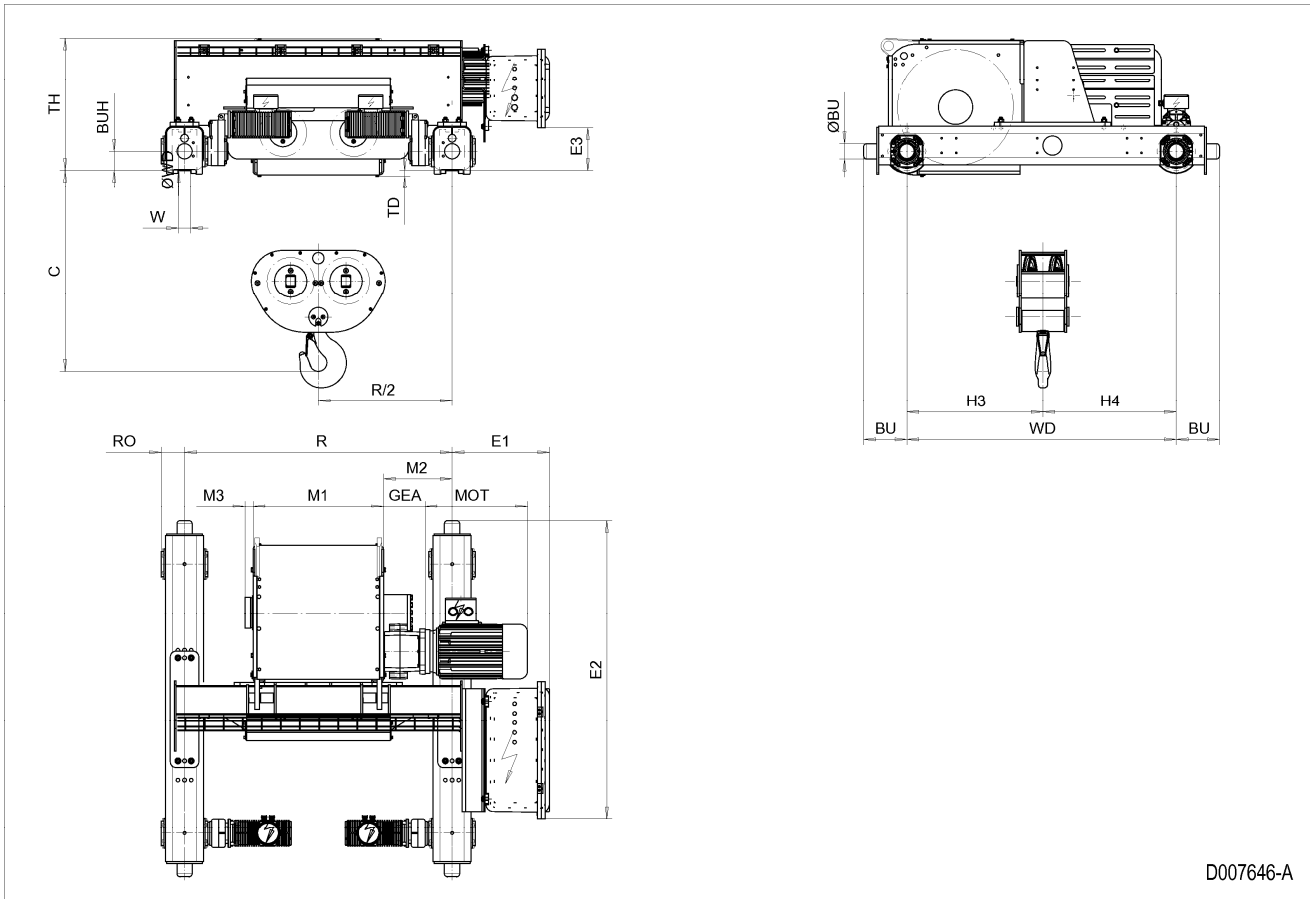

D007646-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	Min R inch	Max R inch	Weight** lb
24'-7"	N/A	E	26.85	14.13	55.12	78.74	4167
34'-5"	24'-7"	F	32.76	17.09	66.93	94.49	4322
45'-11"	36'-1"	G	40.24	13.35	66.93	106.3	4454
62'-4"	52'-6"	H	50.08	14.33	78.74	122.05	4719
83'-8"	73'-10"	J	63.86	15.31	94.49	133.86	5072
103'-4"	93'-6"	K	75.67	15.31	106.3	149.61	5446
126'-4"	116'-6"	L	89.45	16.3	122.05	165.35	5887
142'-9"	132'-10"	M	99.29	17.28	133.86	165.35	6218
160'-9"	150'-11"	N	111.1	19.25	149.61	165.35	6637

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
Weight (lb)	17

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
41.46	7.87	3.15	8.9	3.94	20.07	61.36	8.78	8.58	28.03	27.48	1.73
RO	TD	TH	WB	W min	W max						
4.8	1.1	27.24	55.51	2.13	3.9						

D007646_A
252889

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.