


Double Girder Hoist EXSX6, REEVING: 042; Class I, Division 2

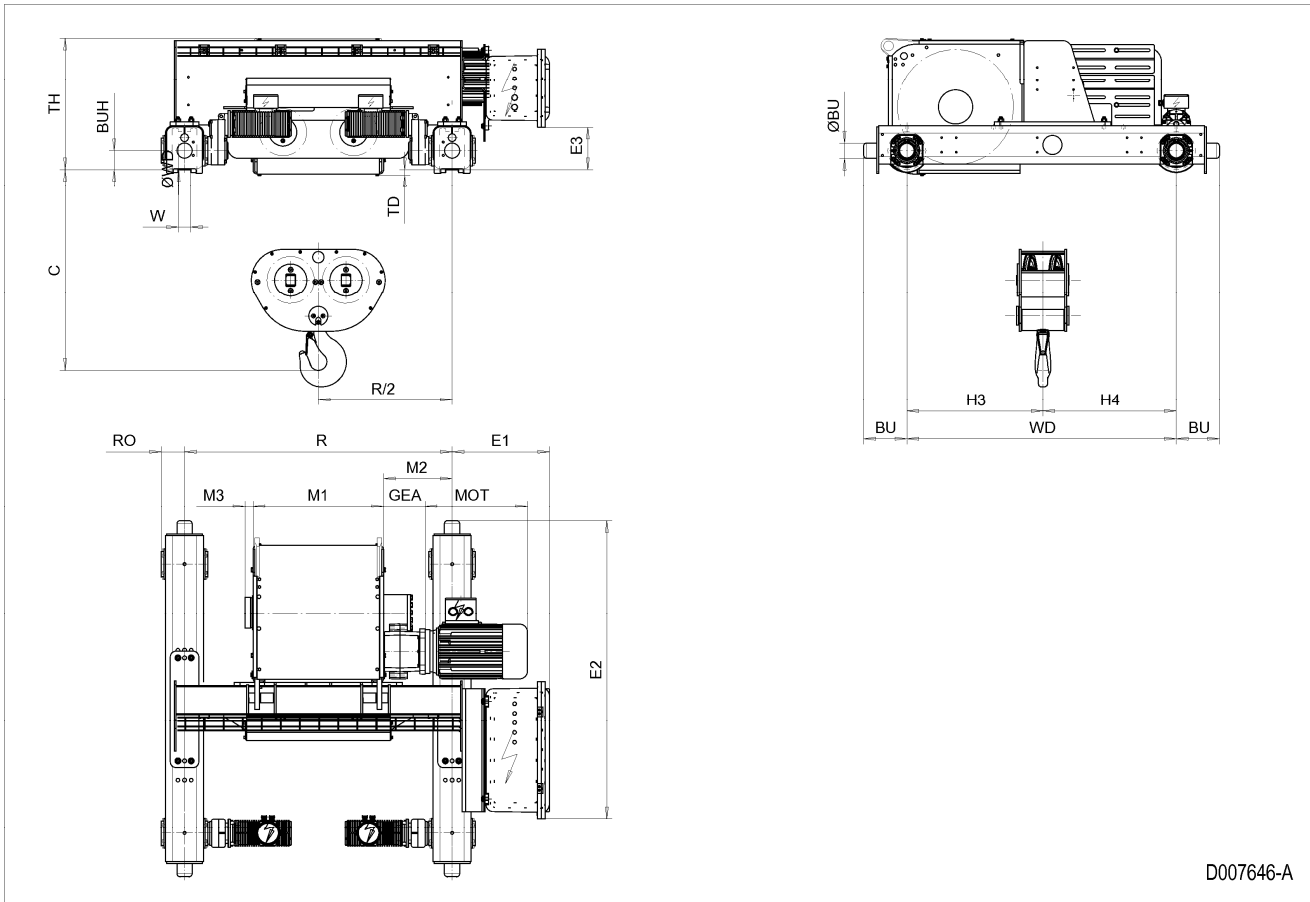

D007646-A

| HOL m | HOL* m | Length code | M1 mm | M2 mm | Min R mm | Max R mm | Weight** kg |
|----------|-----------|----------------|----------|----------|-------------|-------------|----------------|
| 7.5 | N/A | E | 682 | 359 | 1400 | 2000 | 1890 |
| 10.5 | 7.5 | F | 832 | 434 | 1700 | 2400 | 1960 |
| 14 | 11 | G | 1022 | 339 | 1700 | 2700 | 2020 |
| 19 | 16 | H | 1272 | 364 | 2000 | 3100 | 2140 |
| 25.5 | 22.5 | J | 1622 | 389 | 2400 | 3400 | 2300 |
| 31.5 | 28.5 | K | 1922 | 389 | 2700 | 3800 | 2470 |
| 38.5 | 35.5 | L | 2272 | 414 | 3100 | 4200 | 2670 |
| 43.5 | 40.5 | M | 2522 | 439 | 3400 | 4200 | 2820 |
| 49 | 46 | N | 2822 | 489 | 3800 | 4200 | 3010 |

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor Dimensions

| Motor | P6 |
|-------------|-----|
| MOT (mm) | 536 |
| Weight (kg) | 86 |

Traveling dimensions

| Motor | MF06LA |
|-------------|--------|
| Weight (kg) | 7.8 |

Trolley Dimensions

| C | ØWD | ØBU | BU | BUH | E1 | E2 | E3 | GEA | H3 | H4 | M3 |
|------|-----|-----|------|-------|-------|--------|-------|-----|-----|-----|----|
| 1053 | 200 | 80 | 226 | 100 | 509.8 | 1558.5 | 223.1 | 218 | 712 | 698 | 44 |
| RO | TD | TH | WB | W min | W max | | | | | | |
| 122 | 28 | 692 | 1410 | 54 | 99 | | | | | | |

D007646_A
252889

Note: All dimensions in mm.

Note: Weight calculated with P6 and MF06LA motors.

Note: Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.