


Normal Headroom Hoist EXSX6, REEVING: 042; Class I, Division 2

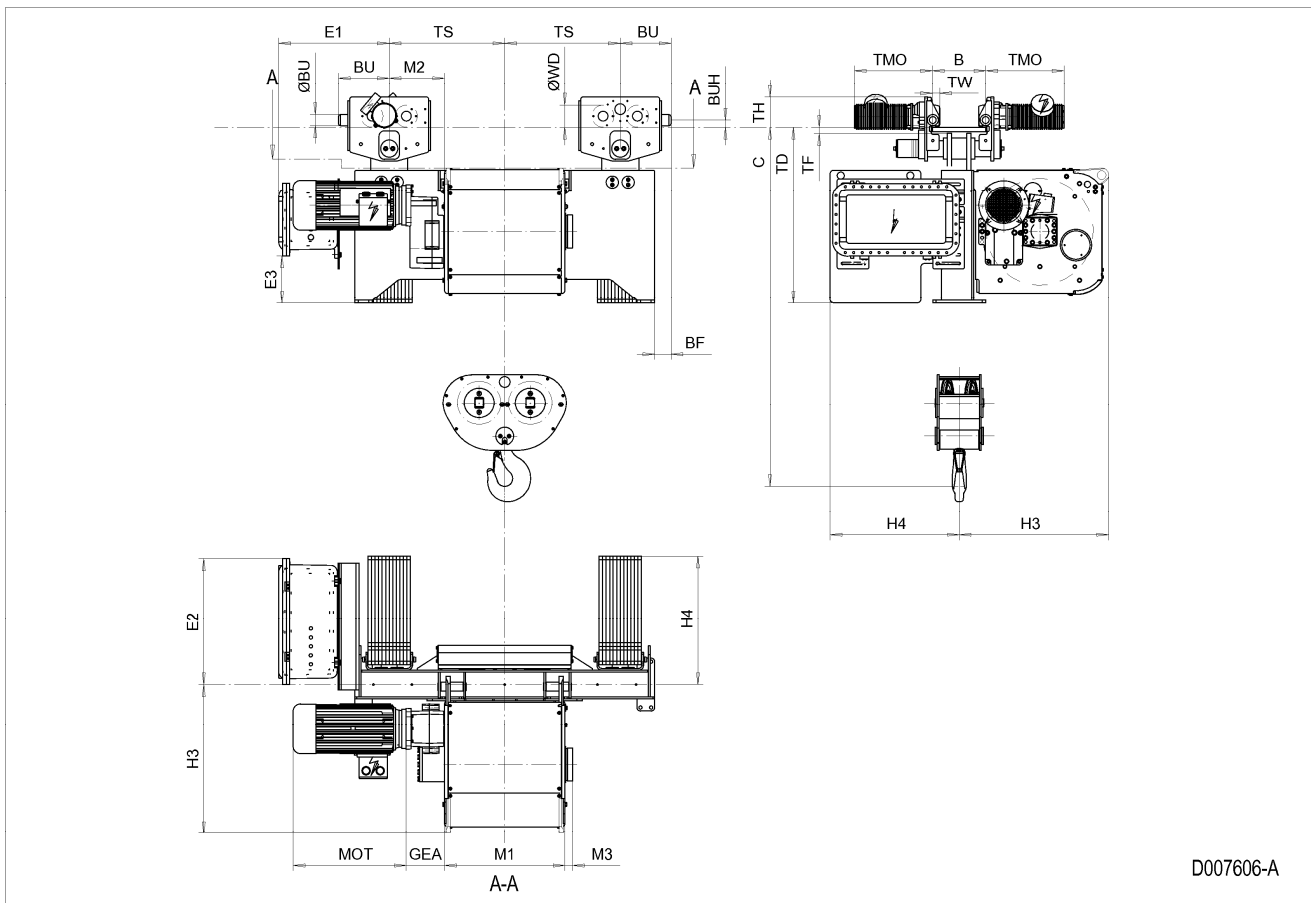

D007606-A

HOL m	HOL* m	Length code	E1 mm	M1 mm	M2 mm	H3 mm	H4 mm	TS mm	BF mm	Weight** kg
7.5	N/A	E	741	682	314	847	732.5	655	93	2400
10.5	7.5	F	741	832	239	847	732.5	655	93	2500
14	11	G	741	1022	144	847	732.5	655	93	2600
19	16	H	741	1272	319	847	732.5	955	93	2800
25.5	22.5	J	741	1622	144	847	732.5	955	93	3100
31.5	28.5	K	1061	1922	-306	847	732.5	655	-227	3400
38.5	35.5	L	1061	2272	-481	847	732.5	655	-227	3600
43.5	40.5	M	1036	2522	-306	847	732.5	955	-202	3900
49	46	N	1036	2822	-456	847	732.5	955	-202	4200

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF06LA
TMO (mm)	398
Weight (kg)	7.8

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
120	610	1975	125	63	288	40	626.6	717.1	269.1	218	44
TD	TF	TH	TW								
998	35	170	41.5								

D007606_A
252673

Note: Weight calculated with P6 and MF06LA motors when B=300 mm.

Note: All dimensions in mm.