


Double Girder Hoist EXSX6, REEVING: 061; Class I, Division 2

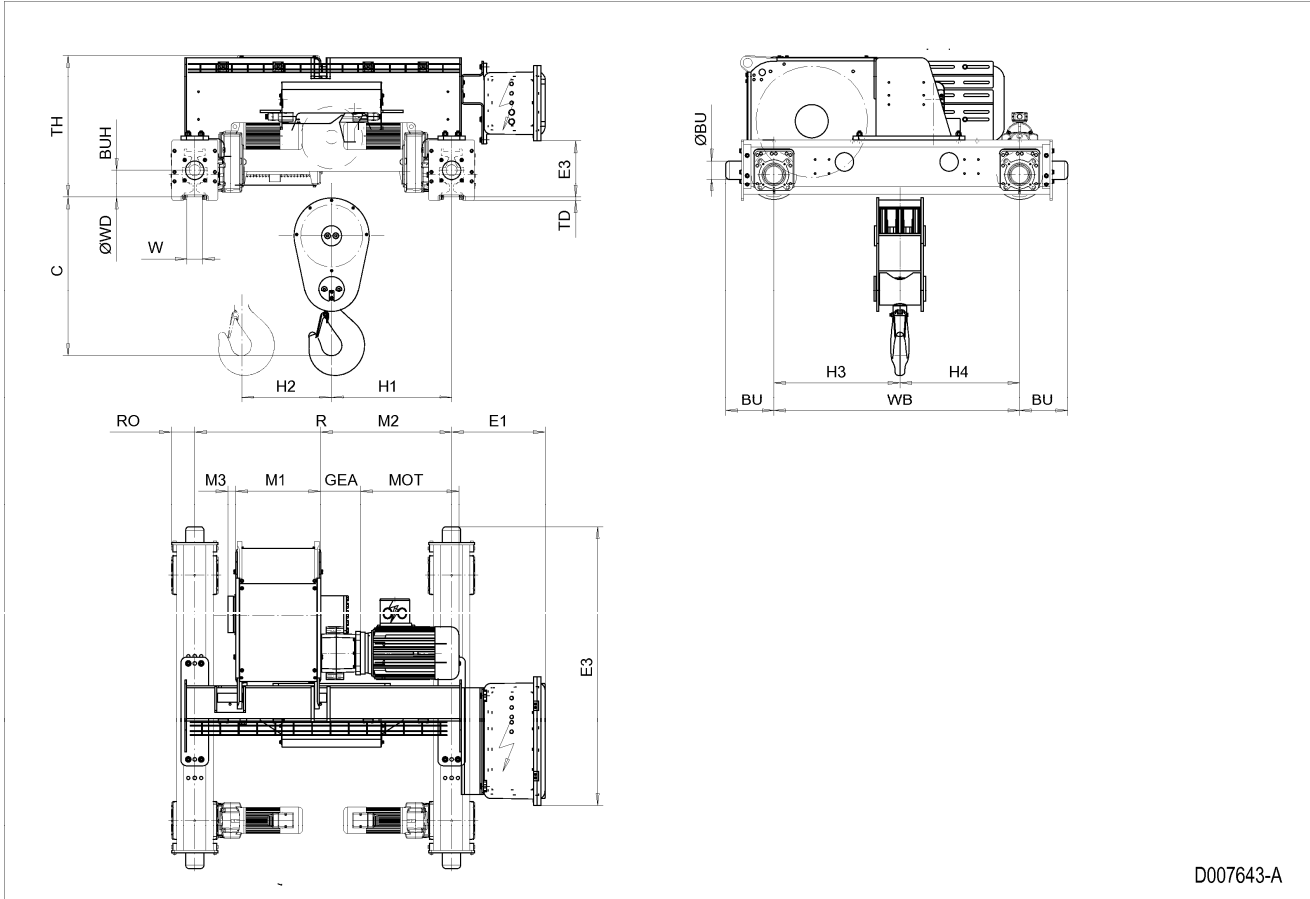

D007643-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	H1 inch	H2 inch	Min R inch	Max R inch	Weight** lb
16'-5"	9'-10"	C	18.19	28.11	25.75	1.81	55.12	55.12	5027
22'-12"	16'-5"	D	22.13	31.46	29.09	2.48	66.93	106.3	5204
29'-6"	22'-12"	E	26.85	31.46	29.09	3.31	66.93	122.05	5314
39'-4"	32'-10"	F	32.76	37.36	35	4.21	78.74	122.05	5535
50'-10"	44'-3"	G	40.24	45.24	42.87	5.51	94.49	149.61	5843
65'-7"	59'-1"	H	50.08	57.83	55.47	7.17	122.05	165.35	6439
86'-11"	80'-5"	J	63.86	61.38	59.02	9.45	133.86	165.35	6924
104'-12"	98'-5"	K	75.67	76.54	74.17	11.38	165.35	165.35	7762

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF07X
Weight (lb)	30

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
34.02	9.84	3.94	10.31	5.91	20.07	59.75	12.13	8.58	27.05	25.71	1.73
RO	TD	TH	WB	W min	W max						
5.12	0.79	30.58	52.76	2.13	3.9						

D007643_A
252866

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF07X motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.