


Double Girder Hoist EXSX6, REEVING: 061; Class I, Division 2

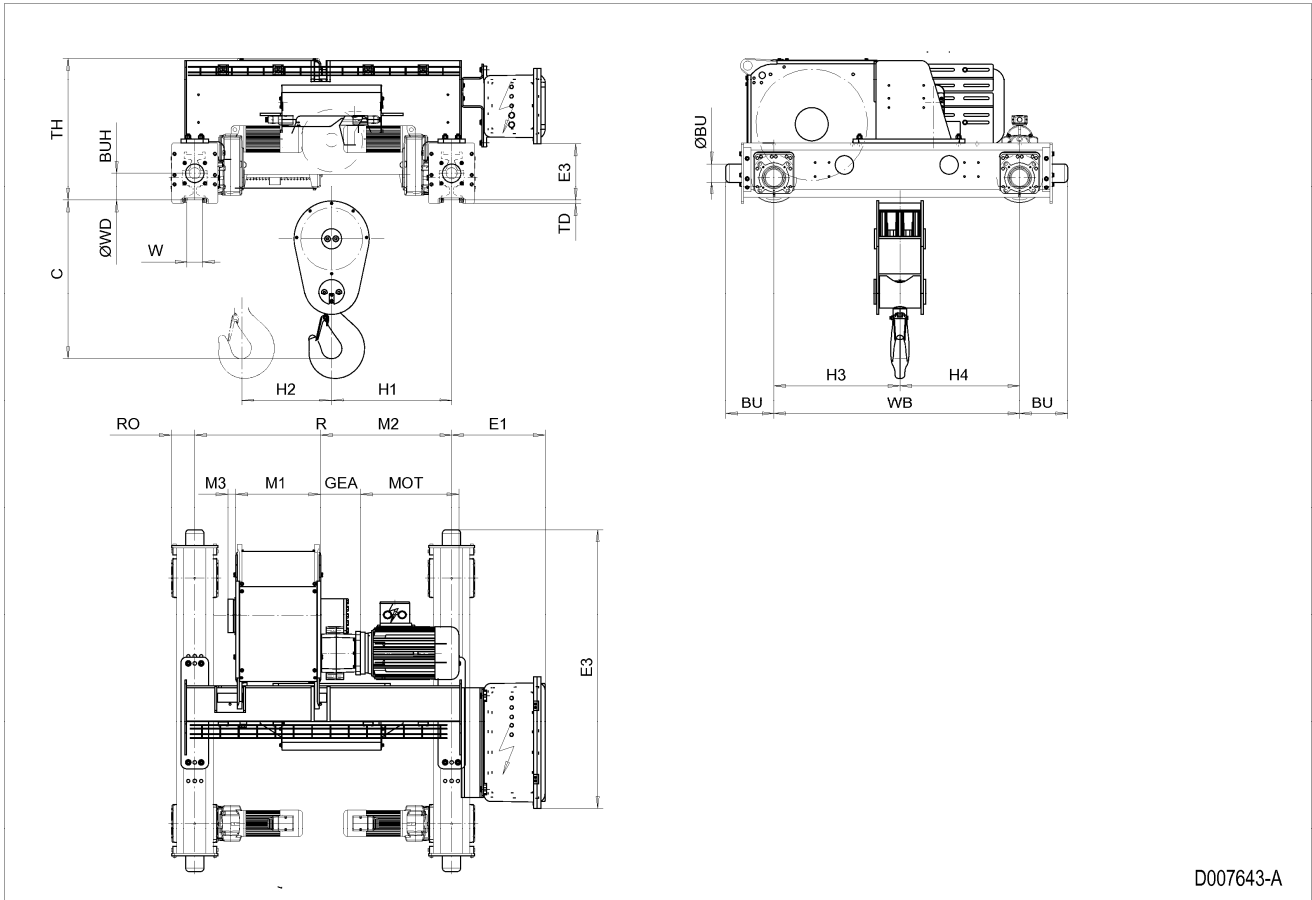

D007643-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	H1 mm	H2 mm	Min R mm	Max R mm	Weight** kg
5	3	C	462	714	654	46	1400	1400	2280
7	5	D	562	799	739	63	1700	2700	2360
9	7	E	682	799	739	84	1700	3100	2410
12	10	F	832	949	889	107	2000	3100	2510
15.5	13.5	G	1022	1149	1089	140	2400	3800	2650
20	18	H	1272	1469	1409	182	3100	4200	2920
26.5	24.5	J	1622	1559	1499	240	3400	4200	3140
32	30	K	1922	1944	1884	289	4200	4200	3520

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor Dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF07X
Weight (kg)	13.5

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
864	250	100	262	150	509.8	1517.7	308.1	218	687	653	44
RO	TD	TH	WB	W min	W max						
130	20	776.8	1340	54	99						

D007643_A
252866

Note: All dimensions in mm.

Note: Weight calculated with P6 and MF07X motors.

Note: Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.