


Fixed Hoist EXSX6, REEVING: 061; Class I, Division 2

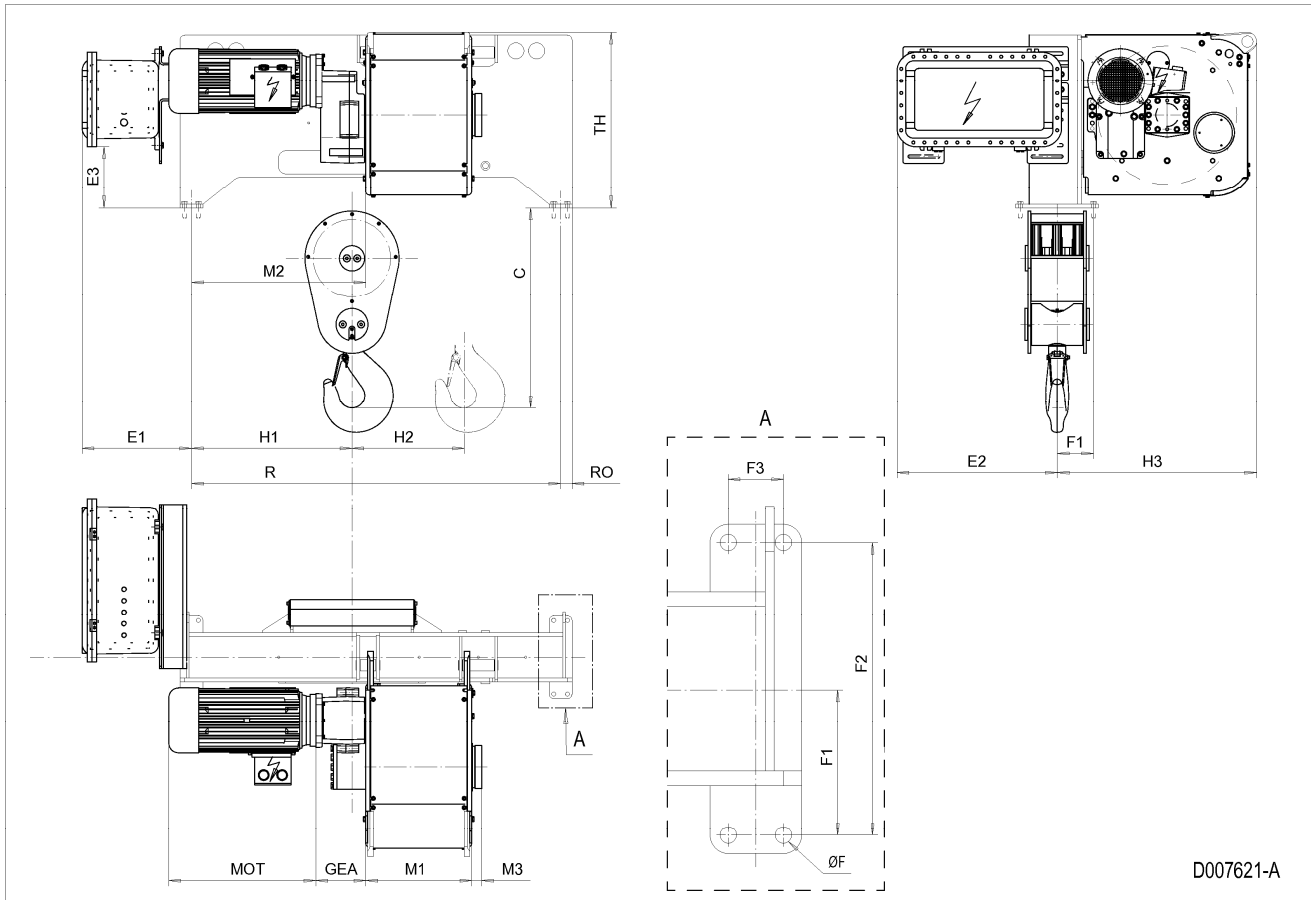

D007621-A

HOL ft	HOL* ft	Length code	R inch	M1 inch	M2 inch	H1 inch	H2 inch	Weight** lb
16'-5"	9'-10"	C	63.39	18.19	29.92	27.56	1.81	3749
22'-12"	16'-5"	D	63.39	22.13	29.92	27.56	2.48	3969
29'-6"	22'-12"	E	72.44	26.85	27.95	25.59	3.31	3969
39'-4"	32'-10"	F	72.44	32.76	27.95	25.59	4.21	4190
50'-10"	44'-3"	G	92.52	40.24	31.1	28.74	5.51	4410
65'-7"	59'-1"	H	92.52	50.08	31.1	28.74	7.17	4631
86'-11"	80'-5"	J	105.08	63.86	29.53	27.17	9.45	5292
104'-12"	98'-5"	K	105.08	75.67	29.53	27.17	11.38	5513

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Trolley dimensions

C	ØF	E1	E2	E3	F1	F2	F3	GEA	H3	M3	RO
34.37	0.71	18.76	27.5	10.59	6.24	12.6	2.36	8.58	34.29	1.73	1.97
TH											
30.24											

D007621_A
252830

Note: Weight calculated with P6 motor.

Note: All dimensions in inch.