


Double Girder Hoist EXSX6, REEVING: 062; Class I, Division 2

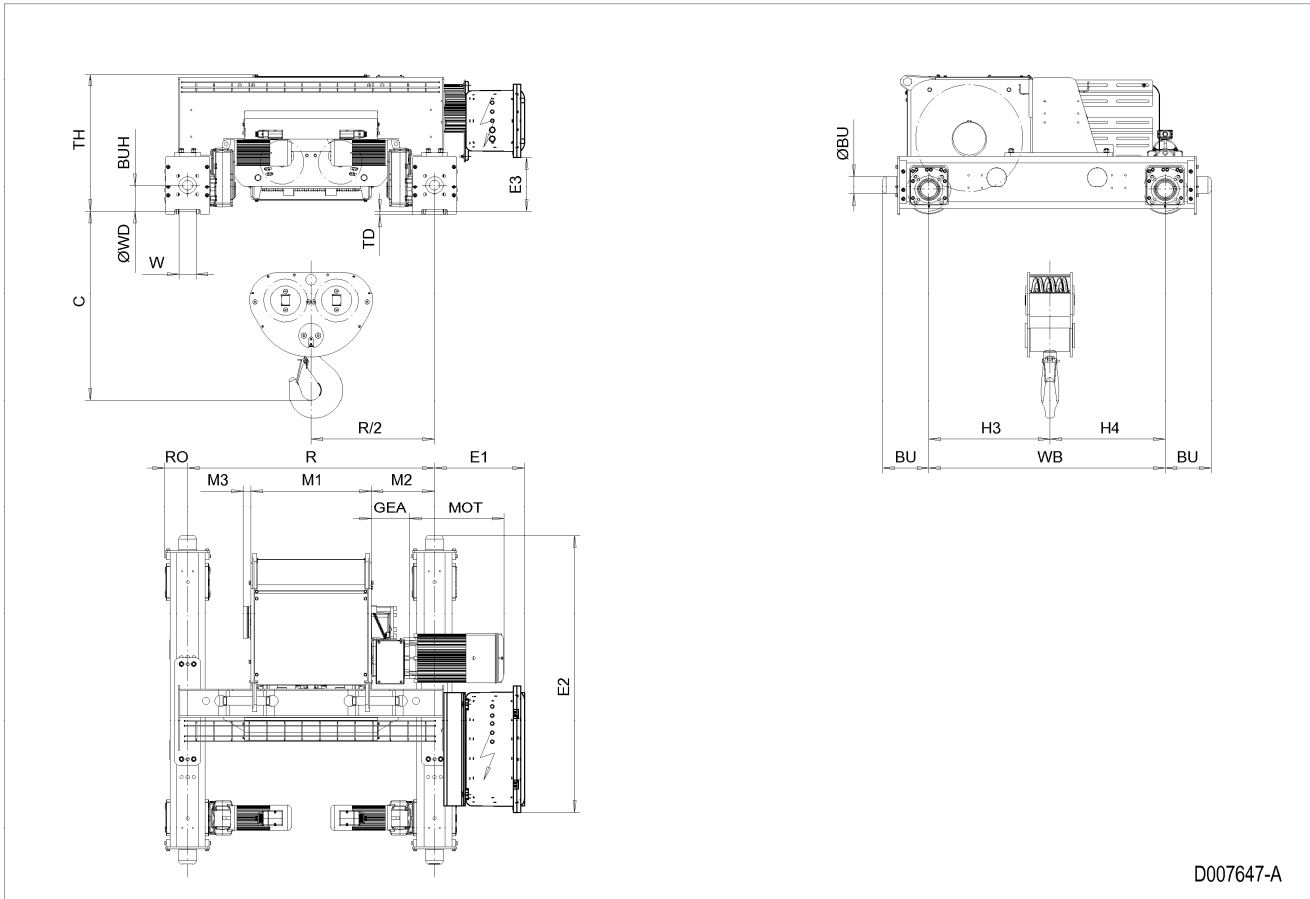

D007647-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	Min R inch	Max R inch	Weight** lb
16'-5"	N/A	E	26.85	14.13	55.12	78.74	5182
22'-12"	16'-5"	F	32.76	17.09	66.93	94.49	5380
31'-2"	24'-7"	G	40.24	13.35	66.93	106.3	5513
41'-0"	34'-5"	H	50.08	14.33	78.74	122.05	5799
55'-9"	49'-3"	J	63.86	15.31	94.49	133.86	6196
68'-11"	62'-4"	K	75.67	15.31	106.3	149.61	6571
83'-8"	77'-1"	L	89.45	16.3	122.05	165.35	7056
93'-6"	86'-11"	M	99.29	17.28	133.86	165.35	7431
106'-8"	100'-1"	N	111.1	19.25	149.61	165.35	7894

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF07X
Weight (lb)	30

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
42.09	9.84	3.94	10.31	5.91	20.07	61.79	12.13	8.58	27.05	25.71	1.73
RO	TD	TH	WB	W min	W max						
5.12	0.79	30.67	52.76	2.13	3.9						

D007647_A
252890

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF07X motors.

Note: Standard rail gauges: 55.1, 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.