


Fixed Hoist EXSX6, REEVING: 062; Class I, Division 2

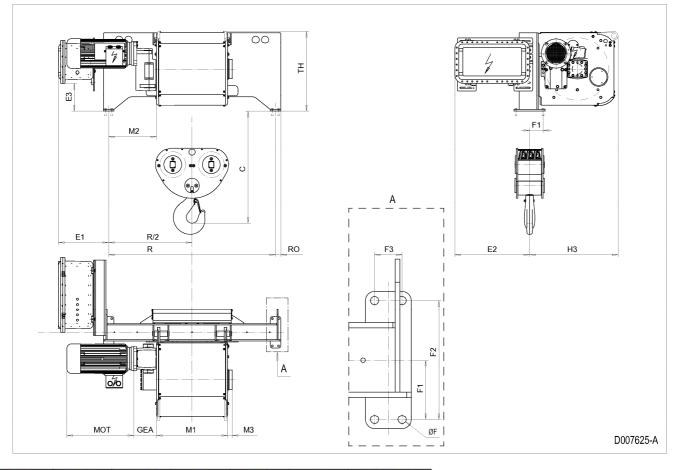

| m | HOL* m | Length code | R mm | M1 mm | M2 mm | Weight** kg | |
|------|-----------|----------------|---------|----------|----------|----------------|--|
| 5 | N/A | E | 1600 | 682 | 459 | 1500 | |
| 7 | 5 | F | 1600 | 832 | 384 | 1500 | |
| 9.5 | 7.5 | G | 1600 | 1022 | 289 | 1600 | |
| 12.5 | 10.5 | н | 2200 | 1272 | 1272 464 | | |
| 17 | 15 | J | 2200 | 1622 | 289 | 1900 | |
| 21 | 19 | K | 2240 | 1922 | 164 | 2100 | |
| 25.5 | 23.5 | L | 2240 | 2272 | -10 | 2300 | |
| 28.5 | 26.5 | M | 2790 | 2522 | 139 | 2400 | |
| 32.5 | 30.5 | N | 2790 | 2822 | -10 | 2600 | |

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor dimensions

| Motor | P6 |
|-------------|-----|
| MOT (mm) | 536 |
| Weight (kg) | 86 |

Trolley dimensions

| С | ØF | E1 | E2 | E3 | F1 | F2 | F3 | GEA | H3 | M3 | RO |
|------|----|-------|-------|-------|-------|-----|----|-----|-----|----|----|
| 1079 | 18 | 481.6 | 717.6 | 269.1 | 129.5 | 260 | 60 | 218 | 847 | 44 | 50 |
| TH | | | | | | | | | | | |
| 768 | | | | | | | | | | | |

D007625_A 252834

Note: Weight calculated with P6 motor. Note: All dimensions in mm.

134/152 This document and the information contained herein, is the exclusive property of R&M Materials Handling Inc. and represents a non-public, confidential and proprietary trade secret that may not be reproduced, disclosed to third parties, altered or otherwise employed in any manner whatsoever without the express written consent of R&M Materials Handling Inc. Copyright 2018 © R&M Materials Handling Inc. All rights reserved.