


Normal Headroom Hoist EXSX6, REEVING: 062; Class I, Division 2

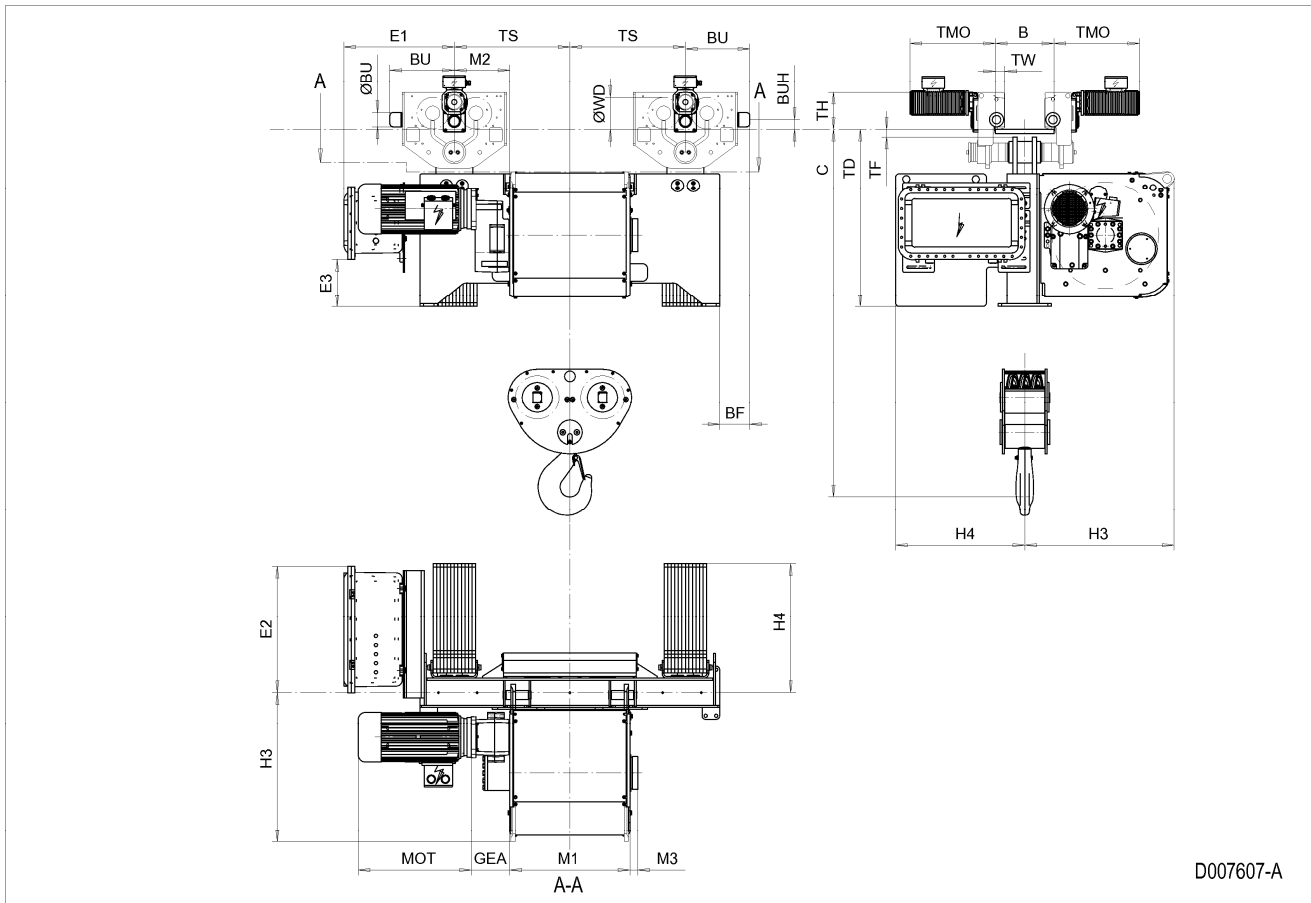

D007607-A

HOL ft	HOL* ft	Length code	E1 inch	M1 inch	M2 inch	H3 inch	H4 inch	TS inch	BF inch	Weight** lb
16'-5"	N/A	E	29.17	26.85	12.36	33.35	28.86	25.79	6.69	5954
22'-12"	16'-5"	F	29.17	32.76	9.41	33.35	28.86	25.79	6.69	6174
31'-2"	24'-7"	G	29.17	40.24	5.67	33.35	28.86	25.79	6.69	6395
41'-0"	34'-5"	H	29.17	50.08	12.56	33.35	28.86	37.6	6.69	6836
55'-9"	49'-3"	J	29.17	63.86	5.67	33.35	28.86	37.6	6.69	7497
68'-11"	62'-4"	K	41.77	75.67	-12.05	33.35	28.86	25.79	-5.91	8159
83'-8"	77'-1"	L	41.77	89.45	-18.94	33.35	28.86	25.79	-5.91	8600
93'-6"	86'-11"	M	40.79	99.29	-12.05	33.35	28.86	37.6	-4.92	9482
106'-8"	100'-1"	N	40.79	111.1	-17.95	33.35	28.86	37.6	-4.92	9923

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling dimensions

Motor	MF06LA
TMO (inch)	18.86
Weight (lb)	17

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
5.12	24.02	82.13	7.09	3.15	14.37	2.09	24.67	28.23	10.59	8.58	1.73
TD	TF	TH	TW								
39.69	1.75	8.19	2.09								

D00607_A
252674

Note: Weight calculated with P6 and MF06LA motors when B=11.8 inch.

Note: All dimensions in inch.