


Normal Headroom Hoist EXSX6, REEVING: 062; Class I, Division 2

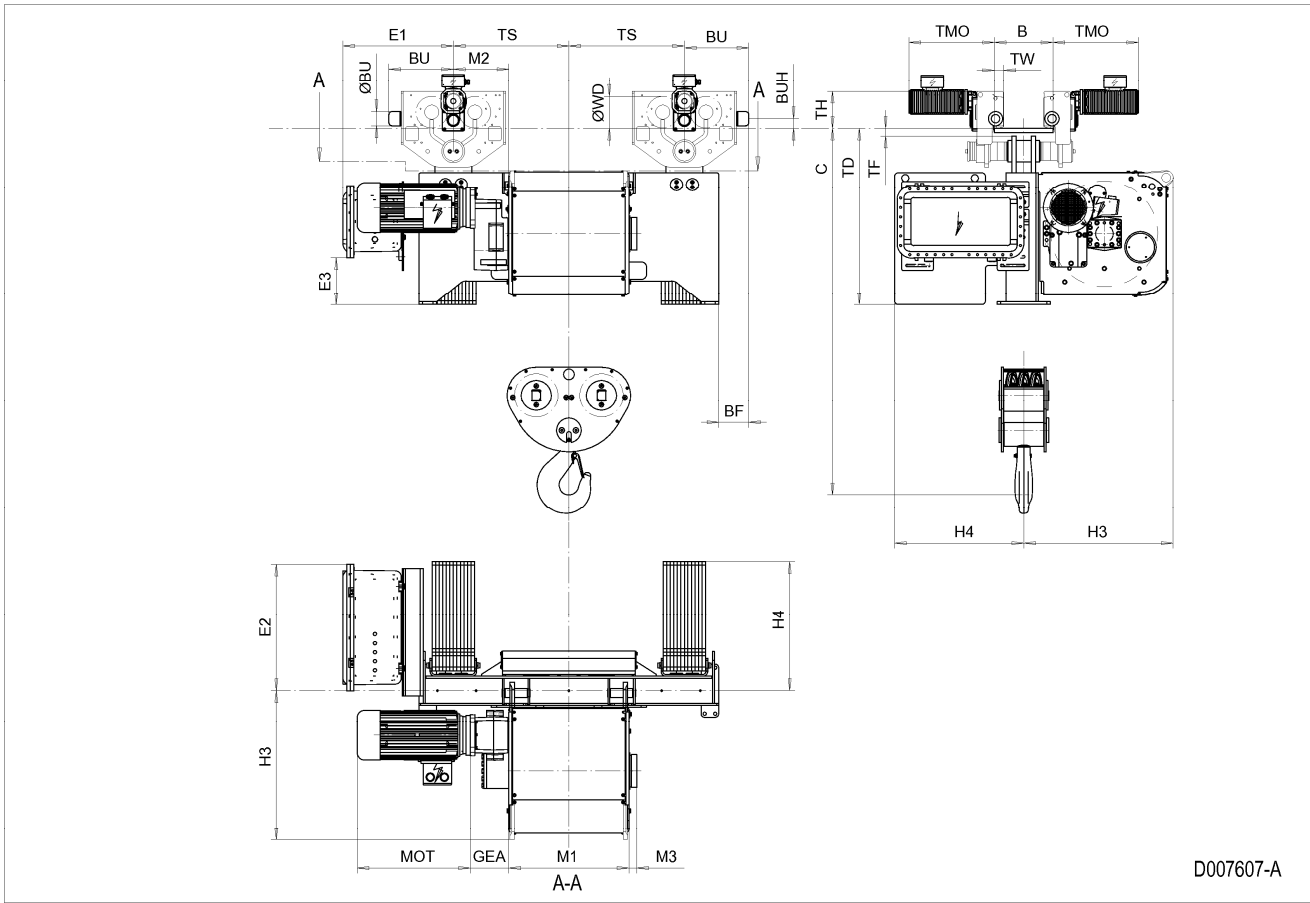

D007607-A

HOL m	HOL* m	Length code	E1 mm	M1 mm	M2 mm	H3 mm	H4 mm	TS mm	BF mm	Weight** kg
5	N/A	E	741	682	314	847	733	655	170	2700
7	5	F	741	832	239	847	733	655	170	2800
9.5	7.5	G	741	1022	144	847	733	655	170	2900
12.5	10.5	H	741	1272	319	847	733	955	170	3100
17	15	J	741	1622	144	847	733	955	170	3400
21	19	K	1061	1922	-306	847	733	655	-150	3700
25.5	23.5	L	1061	2272	-481	847	733	655	-150	3900
28.5	26.5	M	1036	2522	-306	847	733	955	-125	4300
32.5	30.5	N	1036	2822	-456	847	733	955	-125	4500

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF06LA
TMO (mm)	479
Weight (kg)	7.8

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
130	610	2086	180	80	365	53	626.6	717.1	269.1	218	44
TD	TF	TH	TW								
1008	44.5	208	53								

D00607_A
252674

Note: Weight calculated with P6 and MF06LA motors when B=300 mm.

Note: All dimensions in mm.