


Double Girder Hoist EXSX6, REEVING: 081; Class I, Division 2

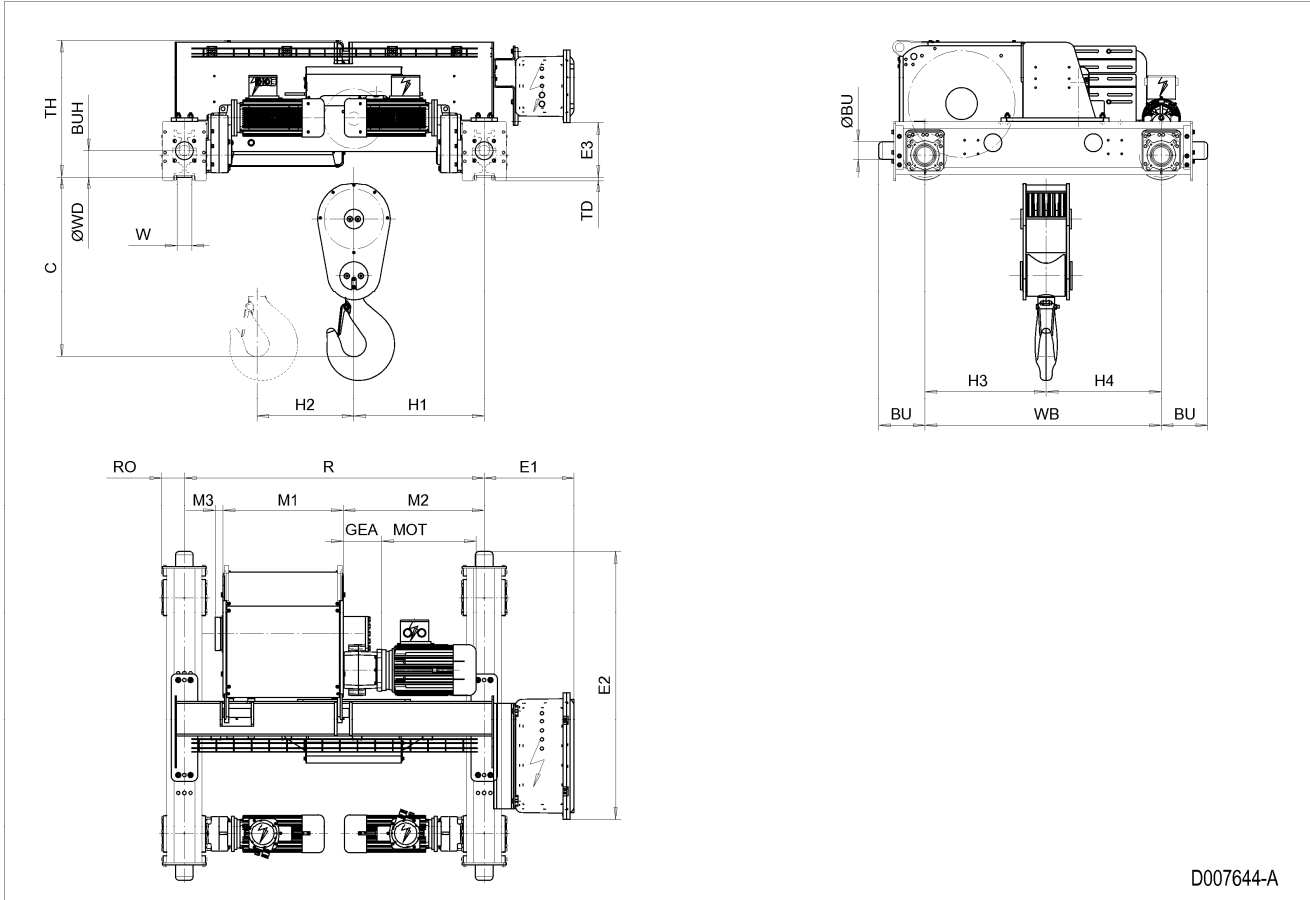

D007644-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	H1 mm	H2 mm	Min R mm	Max R mm	Weight** kg
7	5.5	E	682	799	739	63	1700	3100	2480
9	7.5	F	832	949	889	81	2000	3100	2580
11.5	10	G	1022	1149	1089	105	2400	3800	2720
15	13.5	H	1272	1469	1409	137	3100	4200	2990
20	18.5	J	1622	1559	1499	180	3400	4200	3210
24	22.5	K	1922	1944	1884	217	4200	4200	3600

\*HOL with drum brake

\*\*Presence of a drum brake increases weight by 80 kgs.

Motor Dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF07X
Weight (kg)	13.5

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
1020	250	100	262	150	509.8	1517.7	308.1	218	687	653	44
RO	TD	TH	WB	W min	W max						
130	20	776.8	1340	54	99						

D007644\_A  
252867

Note: Weight calculated with P6 and MF07X motors.

Note: All dimensions in mm.

Note: Standard rail gauges: 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: H1, M2 and weight calculated with Min R.

Note: Flangeless wheels available.