


Normal Headroom Hoist EXSX6, REEVING: 082; Class I, Division 2

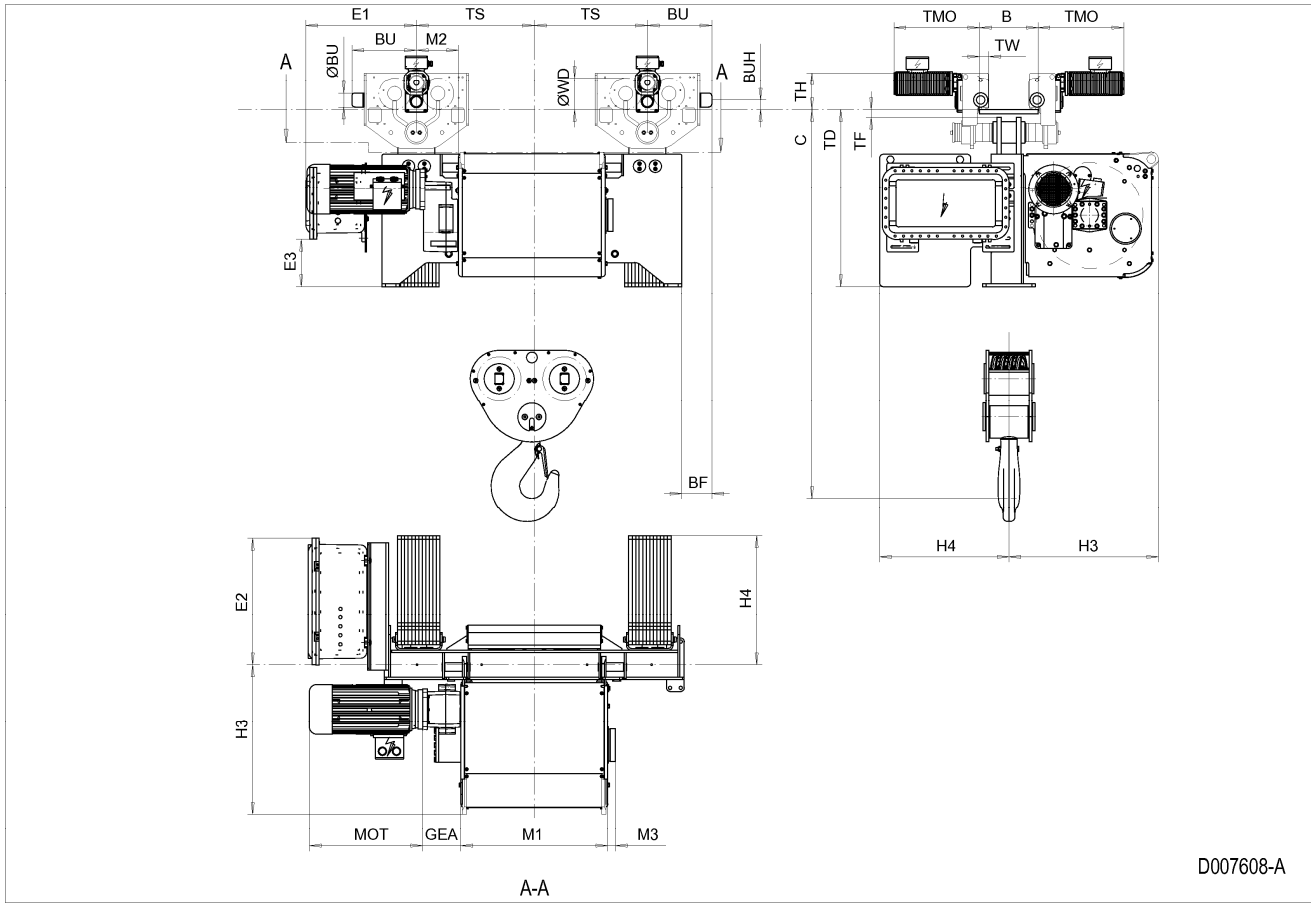

D007608-A

HOL ft	HOL* ft	Length code	E1 inch	M1 inch	M2 inch	H3 inch	H4 inch	TS inch	BF inch	Weight** lb
16'-5"	N/A	F	29.17	32.76	9.41	33.35	28.86	25.79	6.69	6615
22'-12"	18'-1"	G	29.17	40.24	5.67	33.35	28.86	25.79	6.69	6615
31'-2"	26'-3"	H	29.17	50.08	12.56	33.35	28.86	37.6	6.69	7277
41'-0"	36'-1"	J	29.17	63.86	5.67	33.35	28.86	37.6	6.69	7718
50'-10"	45'-11"	K	41.77	75.67	-12.05	33.35	28.86	25.79	-5.91	8379
62'-4"	57'-5"	L	41.77	89.45	-18.94	33.35	28.86	25.79	-5.91	9041
70'-6"	65'-7"	M	40.79	99.29	-12.05	33.35	28.86	37.6	-4.92	9702
80'-5"	75'-6"	N	40.79	111.1	-17.95	33.35	28.86	37.6	-4.92	10143

\*HOL with drum brake

\*\*Presence of a drum brake increases weight by 176 lbs.

Motor dimensions

Motor	P6
MOT (inch)	21.1
Weight ( lb)	190

Traveling dimensions

Motor	MF06LA
TMO (inch)	18.86
Weight ( lb)	17

Trolley dimensions

B min	B max	C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	M3
5.12	24.02	87.09	7.09	3.15	14.37	2.09	24.67	28.23	10.59	8.58	1.73
TD	TF	TH	TW								
39.69	1.75	8.19	2.09								

D007608\_A

252675

Note: Weight calculated with P6 and MF06LA motors when B=11.8 inch.

Note: All dimensions in inch.