


Double Girder Hoist EXSX7, REEVING: 042; Class I, Division 2

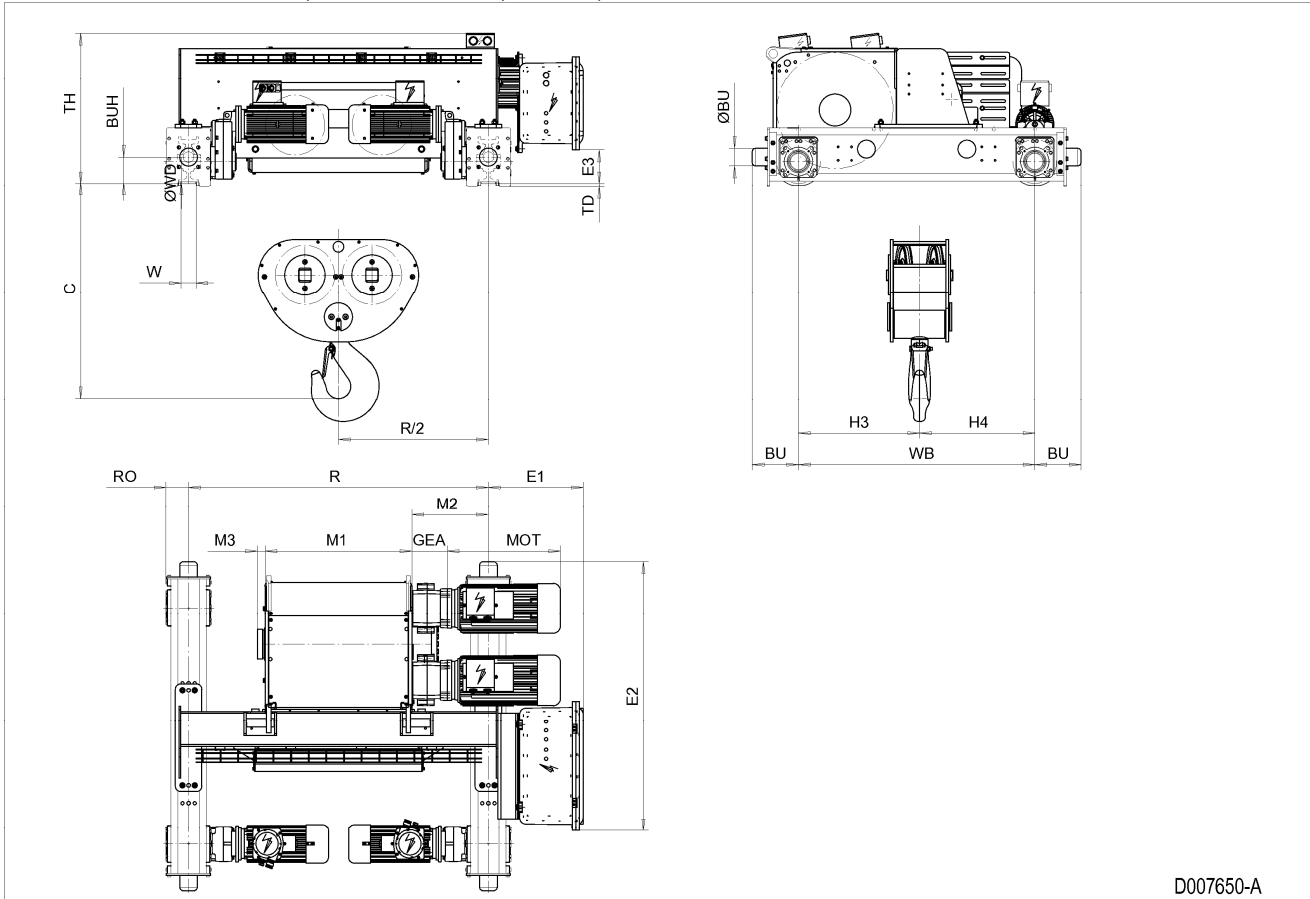

D007650-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	Min R inch	Max R inch	Weight** lb
24'-7"	13'-1"	F	32.76	17.09	66.93	94.49	5843
32'-10"	21'-4"	G	40.24	13.35	66.93	106.3	6196
44'-3"	32'-10"	H	50.08	8.43	78.74	122.05	6483
60'-8"	49'-3"	J	63.86	15.31	94.49	133.86	6924
75'-6"	63'-12"	K	75.67	15.31	106.3	149.61	7254
90'-3"	78'-9"	L	89.45	16.3	122.05	165.35	7695
101'-8"	90'-3"	M	99.29	17.28	133.86	165.35	8026
116'-6"	104'-12"	N	111.1	19.25	149.61	165.35	8467

*HOL with drum brake

**Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling Dimensions

Motor	MF07X
Weight (lb)	30

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
48.03	9.84	3.94	10.31	5.91	21.19	60.07	7.51	7.91	27.05	25.71	1.73
RO	TD	TH	WB	W min	W max						
5.12	0.79	33.54	52.76	2.13	3.9						

D007650_A
252895

Note: Weight calculated with P6 and MF07X motors.

Note: All dimensions in inch.

Note: Standard rail gauges: 66.9, 78.7, 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.