


Double Girder Hoist EXSX7, REEVING: 062; Class I, Division 2

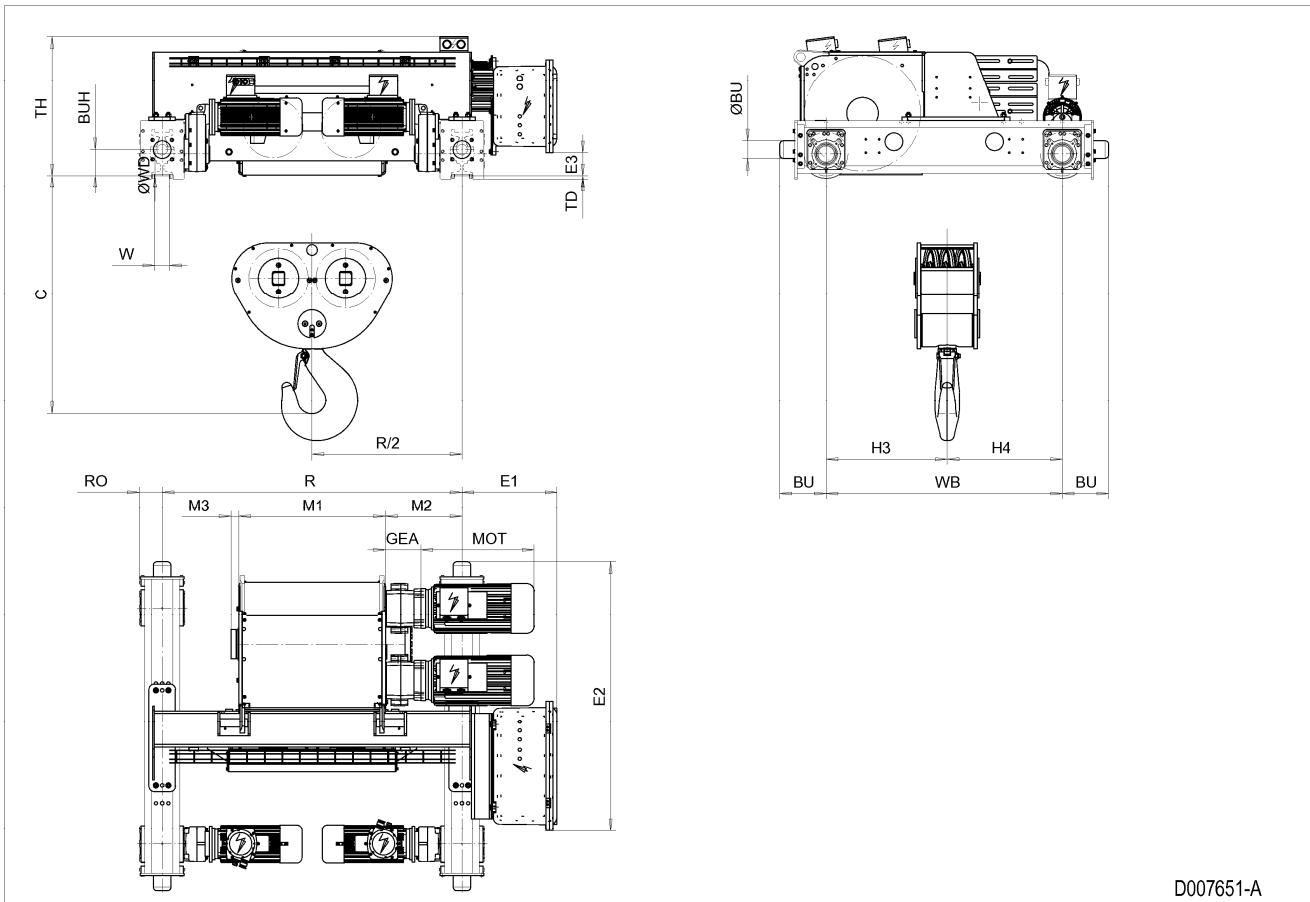

D007651-A

HOL m	HOL* m	Length code	M1 mm	M2 mm	Min R mm	Max R mm	Weight** kg
5	2.5	F	832	434	1700	2400	2900
6.5	4	G	1022	339	1700	2700	3060
9	6.5	H	1272	214	2000	3100	3200
12.5	10	J	1622	389	2400	3400	3430
15	12.5	K	1922	389	2700	3800	3680
18.5	16	L	2272	414	3100	4200	3950
20.5	18	M	2522	439	3400	4200	4160
23.5	21	N	2822	489	3800	4200	4410

*HOL with drum brake

**Presence of a drum brake increases weight by 80 kgs.

Motor Dimensions

Motor	P6
MOT (mm)	536
Weight (kg)	86

Traveling dimensions

Motor	MF10M
Weight (kg)	26

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
1354	250	100	262	150	538.2	1525.7	132.7	201	687	653	44
RO	TD	TH	WB	W min	W max						
129	20	794	1340	54	99						

D007651_A
252896

Note: Weight calculated with P6 and MF10M motors.

Note: All dimensions in mm.

Note: Standard rail gauges: 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.