


Double Girder Hoist EXSX7, REEVING: 082; Class I, Division 2

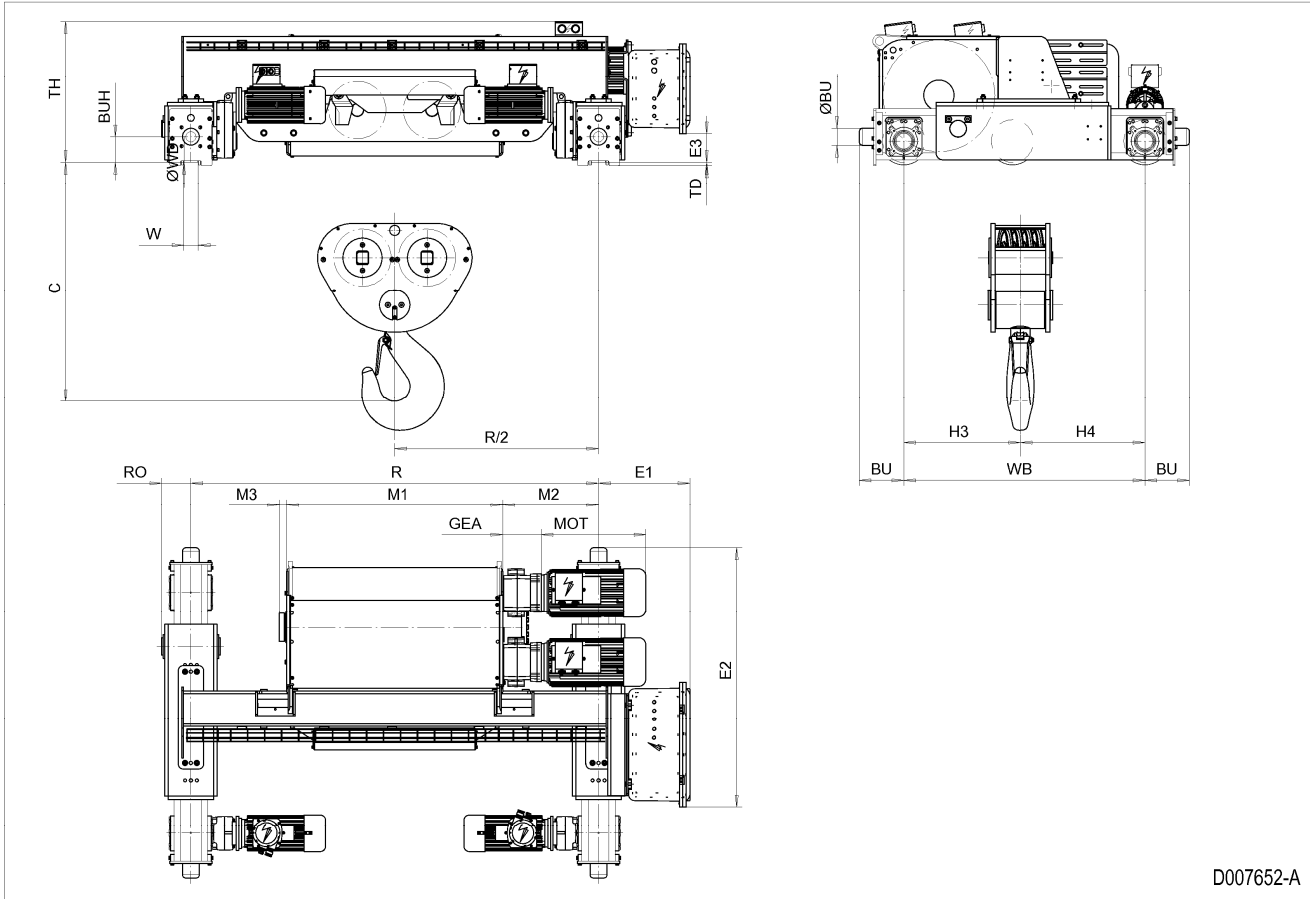

D007652-A

HOL ft	HOL* ft	Length code	M1 inch	M2 inch	Min R inch	Max R inch	Weight** lb
21'-4"	14'-9"	H	50.08	22.2	94.49	122.05	8445
29'-6"	22'-12"	J	63.86	15.31	94.49	133.86	8754
36'-1"	29'-6"	K	75.67	15.31	106.3	149.61	9305
44'-3"	37'-9"	L	89.45	16.3	122.05	165.35	9923
50'-10"	44'-3"	M	99.29	17.28	133.86	165.35	10364
57'-5"	50'-10"	N	111.1	19.25	149.61	165.35	10937

\*HOL with drum brake

\*\*Presence of a drum brake increases weight by 176 lbs.

Motor Dimensions

Motor	P6
MOT (inch)	21.1
Weight (lb)	190

Traveling Dimensions

Motor	MF10M
Weight (lb)	57

Trolley Dimensions

C	ØWD	ØBU	BU	BUH	E1	E2	E3	GEA	H3	H4	M3
55.51	9.84	3.94	10.31	5.91	21.19	60.07	6.6	7.91	27.05	28.86	1.73
RO	TD	TH	WB	W min	W max						
6.81	0.79	31.38	55.91	2.13	3.9						

D007652\_A  
252897

Note: All dimensions in inch.

Note: Weight calculated with P6 and MF10M motors.

Note: Standard rail gauges: 94.5, 106.3, 122, 133.9, 149.6 and 165.4.

Note: M2 and weight calculated with Min R.

Note: Flangeless wheels available.