
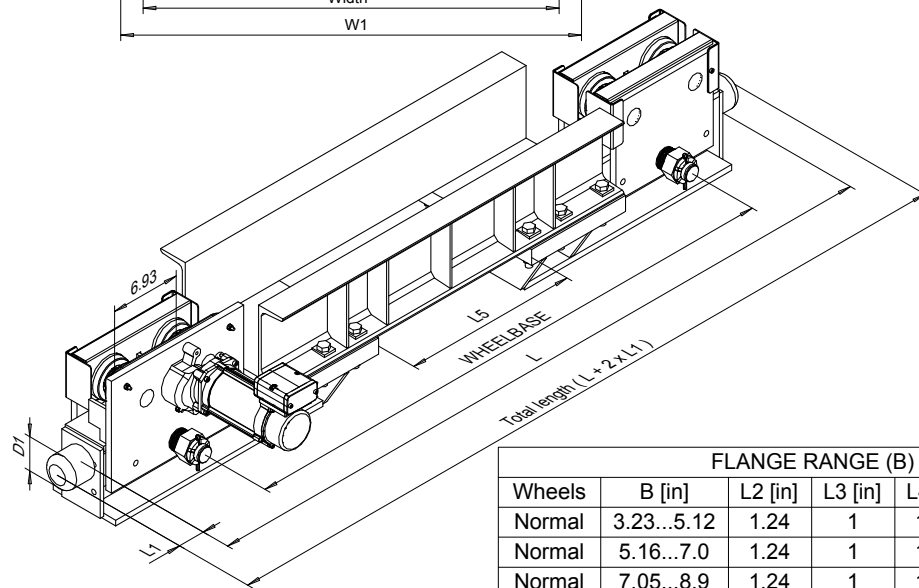


RH10 UNDER RUNNING END TRUCK

US-60Hz

a) with MF06 motor and GEK2 gear combination.

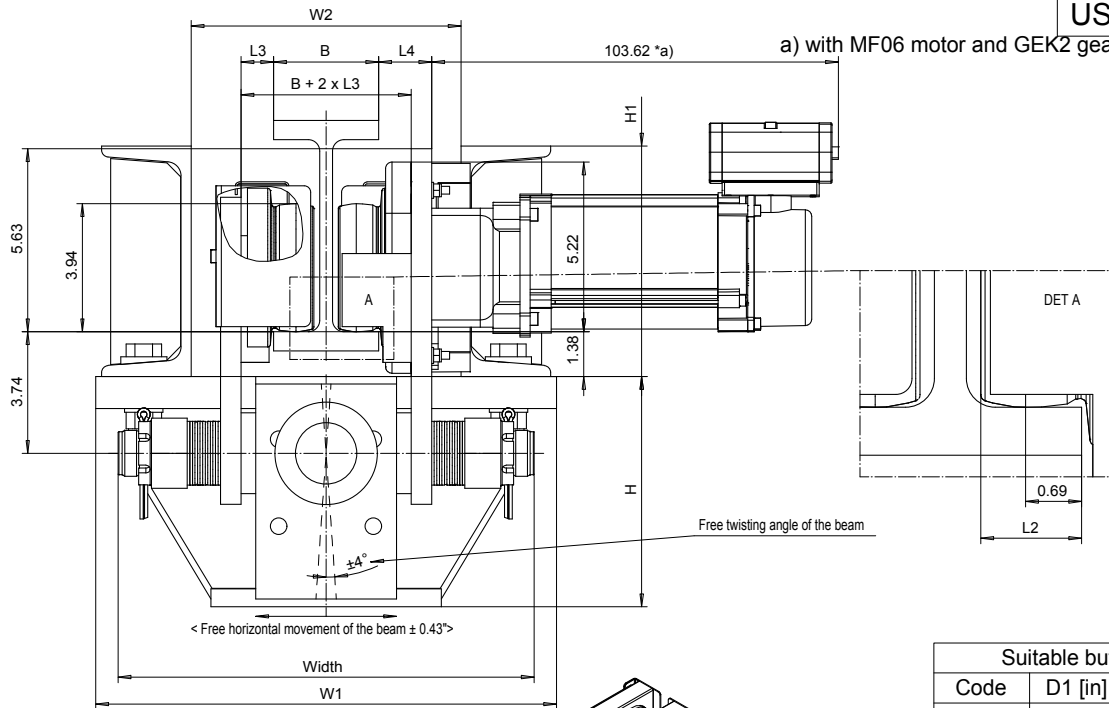

Suitable buffers		
Code	D1 [in]	L1 [in]
A	2.48	2.09
B	3.15	2.68
C	3.94	3.35
K	3.15	3.15
G	3.94	3.94
E	3.94	5.91
A, B, C: Rubber		
K, G, E: Polyurethane		

FLANGE RANGE (B) DIMENSIONS

Wheels	B [in]	L2 [in]	L3 [in]	L4 [in]	Width [in]	W1 [in]	W2 [in]
Normal	3.23...5.12	1.24	1	1.63	12.8	14.17	8.31
Normal	5.16...7.0	1.24	1	1.63	14.69	14.17	8.31
Normal	7.05...8.9	1.24	1	1.63	16.57	19.88	14.02
Normal	8.94...10.7	1.24	1	1.63	18.46	19.88	14.02
Normal	10.83...12.	1.24	1	1.63	20.35	19.88	14.02
Patented	2.4...4.29	0.83	1.42	2.05	12.8	14.17	8.31
Patented	4.33...6.18	0.83	1.42	2.05	14.69	14.17	8.31

WHEELBASE	Max dyn corner load [lb]	L [in]	L5 [in]	Weight [lb]	H [in]	H1 [in]
55.12" (1400 mm)	10350	70.47	17.32	628	7.09	7.09
70.87" (1800 mm)	10350	86.22	33.07	672	7.09	7.09
90.55" (2300 mm)	10350	105.91	52.76	727	7.09	7.09
110.23" (2800 mm)	10350	125.59	72.44	816	7.09	7.87

This document is the absolute property of R&M Materials Handling, Inc. This document must not be copied without the written permission of R&M Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

ETTAJA Design	ETRSI Ctd	ETRSI Appd	ETRSI Ref Drawing	UR10
2007-06-28 Date	END CARRIAGE			1 of 6 UR/PR 4
SLEQDOCV Owner Dept	UR10			
R&M	D005016-A			