
## RTN09 END TRUCK

SI-50/60 Hz

## For single and double girder cranes

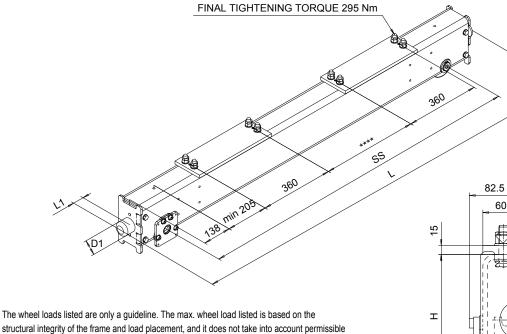

The wheel loads listed are only a guideline. The max. wheel load listed is based on the structural integrity of the frame and load placement, and it does not take into account permissible wheel loading or bearing life. SG load placement is at the center, and DG load placement is for a trolley gage of 1200 mm [47 1/4"].

The permissible dynamic wheel load listed is based on assumptions that the bridge speed is 40 m/min [130 fpm], end truck duty is Fem 2m, and the runway rail as listed.

The actual wheel load should not exceed the permissible wheel load. If the permissible dynamic wheel load is greater than the maximum dyn wheel load, then the actual wheel load cannot exceed maximum dyn wheel load.

Dynamic wheel = 1.15 x static wheel load

	L 02.0	_ ==	ı
	60	80	
15			64
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	4
	11 8184	- 233 / J	
エ			
			4
			100
	<u> </u>	= = 学师	] [8 ]
H 10			
Ξļ	U		15
	80	0	24

82.5

			SG			DG	Permissible dyn wheel load			
SS	Н	H1	WT	Max dyn whl load	WT	Max dyn whl load	ASCE 30	ASCE 30 ASCE 40 2		
[mm]	[mm]	[mm]	[kg]	[kN]	[kg]	[kN]	[kN]	[kN]	[kN]	
1250	200	10	78	28	-	-	21.5	24.7	31.9	
1600	200	10	98	28	100	28	21.5	24.7	31.9	
2000	200	10	112	28	114	28	21.5	24.7	31.9	
2500	200	10	0 131 28		133	28	21.5	24.7	31.9	

L = SS + 276 + 2\*L1

Available only with ductile iron wheel.

UU = 50...70

RTN09 end truck is compatible with the GES3 gear motor and can be equipped with a second gear motor.

If the crane speed is faster, the duty group is more severe, or the actual runway rail is narrower, then the maximum allowable dynamic wheel load must be re-evaluated.

Suitable buffers							
Code	L1 [mm]						
Α	63	53					
В	80	68					
С	100	85					
A, B, C: Rubber							

					ETTVPH Design		ETTVPH				-
							Chd Appd Bef Drawing  END CARRIAGE				€
Re	Explanation Date	ite	Revised by	Checked by	SLEQDOCV Owner Dept		RTN09				1 : 6 Folder
	This document is the absolute property of RAM Materials Handling, Inc. This document must not be copied					BAN MATERIALS RADILING, INC					ECN09
	without the written permission of RAM Materials Handling, Inc. The contents thereof must not be disclosed to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.				R&M	BOST & GAIE PROJETS SPECIFIED, DED	D004778-B				03/2011